


FED. SUP CLASS  
5930

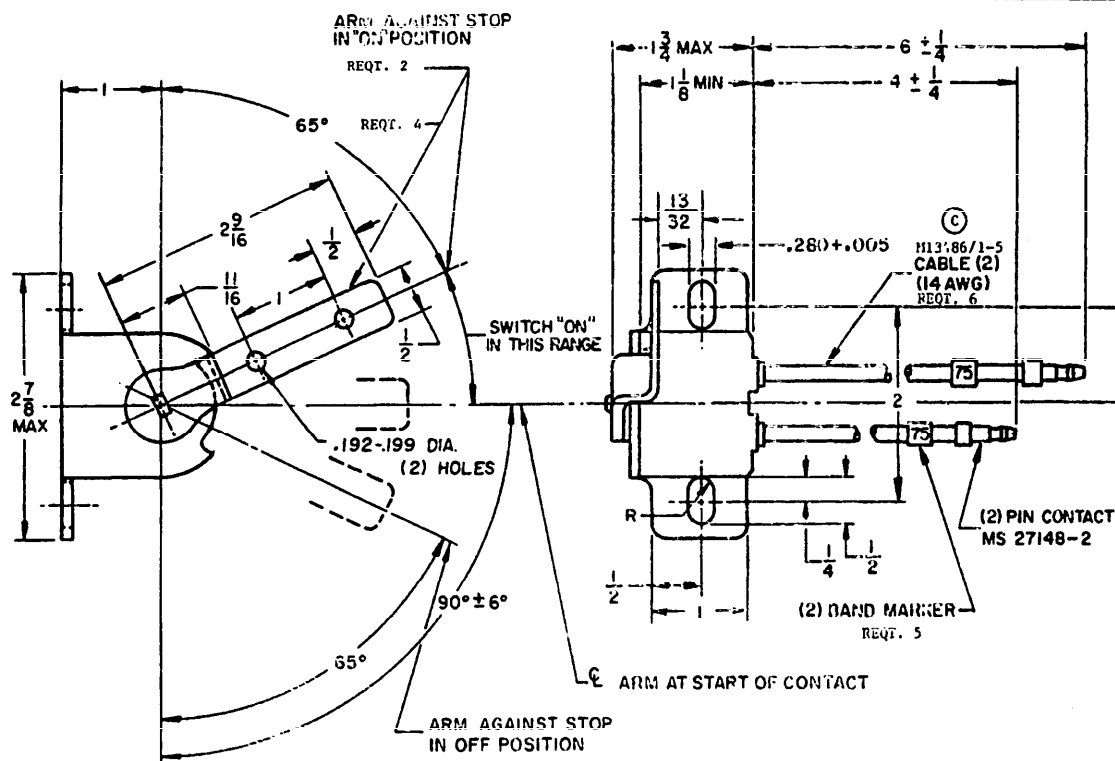

**(C) REQUIREMENTS:**

1. TYPE I (SPST) CLASS 1 (WATERPROOF) OF PROCUREMENT SPECIFICATION.
2. ARM IS SPRING LOADED TO RETURN TO THE "ON" POSITION.
3. SWITCH CONTACT RATING: RESISTIVE LOAD 10 AMPS OR LAMP LOAD 10 AMPS.
4. FORCE SHALL BE 20  $\pm$  5 OUNCES WHEN APPLIED AT THE OUTER HOLE OF THE ACTUATING ARM.
5. BAND MARKER, M43436/1-1 OR DRAWING NO. 108-5481, SHALL BE AFFIXED SECURELY TO THE CABLES.
6. CABLE SHALL BE IN ACCORDANCE WITH MIL-C-13486.

NOTES:

1. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE  $\pm .032$  ON FRACTIONS,  $\pm .005$  ON DECIMALS,  $\pm 2^\circ$  ON ANGLES.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, ROTATIONS AND REFERENCED DOCUMENTS.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
5. MARKING SHALL CONSIST OF THE NS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.
6. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATION WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

© DENOTES CHANGES

P.A. ARMY - AT Other Cust	TITLE SWITCH, ROTARY: STOPLIGHT, VEHICULAR, MECHANICALLY ACTUATED, 24 VOLT D C	MS 75064 MILITARY STANDARD MS75064(AT)
PROCUREMENT SPECIFICATION MIL-S-13623 (AT)	SUPERSEDES:	SHEET OF

This military standard is approved for use by the US Army Tank-Automotive Materiel Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.