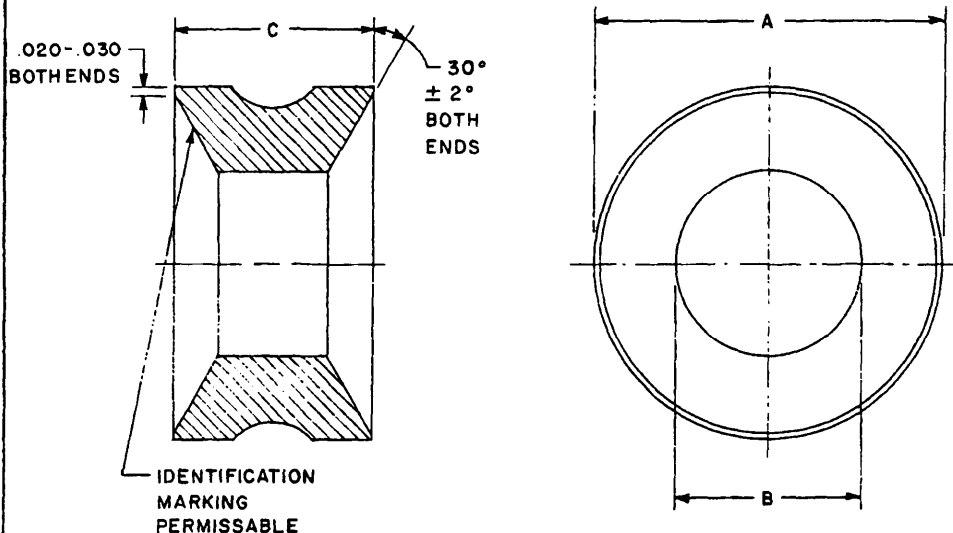


FED. SUP CLASS
5935

MS PART NUMBER	SHELL SIZE REF	A DIA + .000 - .020	B DIA + .020 - .000	C	MIN. CABLE DIA REF
MS -1	28	1.805	.969	1.034	.844
MS -2	28,32	↓	1.130	↓	1.005
MS -3	32	↓	1.260	↓	1.135
MS -4	40	2.427	1.609	1.222	1.484
MS -5	↓	↓	1.900	↓	1.775
MS -6	↓	↓	1.844	↓	1.719
MS -7	44	2.680	2.016	↓	1.871
MS -8	44	2.680	1.969	↓	1.824
MS -9	48	2.802	2.328	1.284	2.183
MS -10	48	2.802	2.250	1.284	2.105

NOTES:

1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE IS $\pm .010$.
2. MATERIAL IS SYNTHETIC RUBBER CONFORMING TO THE APPLICABLE REQUIREMENTS OF MIL-STD-417, GRADE SC 715 A₁ B₁ E₃ EXCEPT DUROMETER TO BE 75 ± 5 .

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. **EL**
Other Cust

TITLE

GLAND, CABLE SEALING

MILITARY STANDARD

MS 75099(EL)

PROCUREMENT SPECIFICATION

SUPERSEDES:

SHEET **1** OF **1**

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 13 October 1970 REVISED