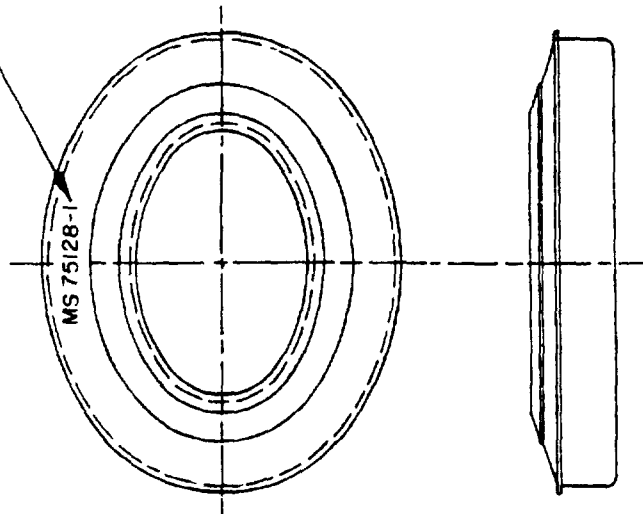


FED SUP CLASS
5965User activities: Army -MC,AS,SH
Navy -
Air Force -11Reviewer activities: Army
Navy
Air Force -11,13

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

HOT STAMP GOTHIC CHARACTERS,
.12 HIGH, CENTRALIZED

Mat'l Film, flexible vinyl, MIL-F-10400, class 2, black, .020± .002 thick. except as noted.

- (a) Temperature range per MIL-E-55119, operating ambient temperature in the range of +150° F to -40° F (The 150° temperature includes the effect of sunload). Exposure at the high temperature extreme not to exceed 4 hours, and at the low temperature extreme not to exceed 72 hours at any one time. Non-operating exposure in the range of +160° F to -80° F. Exposure at the high temperature not to exceed 4 hours and at the low temperature extreme not to exceed 24 hours.
- (b) One side dull matte.

(A) ENTIRE STANDARD REVISED

P A Army-CR	International interest	TITLE	MILITARY STANDARD
Other Cust AF-85 Navy - EC		CUSHION, EARPHONE	MS 75128
Procurement Specification MIL-H-55353		SUPERSEDES	PAGE 1 OF 2

DD FORM 672
1 SEP 63

(Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5965-0169

APPROVED 27 Jul 71 REVISED (A) 13 MARCH 1979

User activities: Army
Navy
Air ForceReviewer activities: Army
Navy
Air Force

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS 5965																																																																																	
<p>DETAIL-A TYP ALL AROUND</p>																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>INCHES</th> <th>MM</th> <th>INCHES</th> <th>MM</th> <th>INCHES</th> <th>MM</th> <th>INCHES</th> <th>MM</th> <th>INCHES</th> <th>MM</th> <th>INCHES</th> <th>MM</th> </tr> </thead> <tbody> <tr> <td>.002</td> <td>.05</td> <td>.031</td> <td>.79</td> <td>.75</td> <td>19.05</td> <td>1.067</td> <td>27.10</td> <td>1.800</td> <td>45.72</td> <td>2.570</td> <td>65.28</td> </tr> <tr> <td>.005</td> <td>.13</td> <td>.06</td> <td>1.52</td> <td>.855</td> <td>21.72</td> <td>1.326</td> <td>33.68</td> <td>1.967</td> <td>49.96</td> <td>3.035</td> <td>77.09</td> </tr> <tr> <td>.020</td> <td>.51</td> <td>.55</td> <td>13.97</td> <td>900</td> <td>22.86</td> <td>1.457</td> <td>37.01</td> <td>2.120</td> <td>53.85</td> <td>3.340</td> <td>84.84</td> </tr> <tr> <td>.030</td> <td>.76</td> <td>.663</td> <td>16.84</td> <td></td> <td></td> <td>1.517</td> <td>38.53</td> <td>2.135</td> <td>54.23</td> <td>4.240</td> <td>107.70</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>1.670</td> <td>42.42</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>										INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	.002	.05	.031	.79	.75	19.05	1.067	27.10	1.800	45.72	2.570	65.28	.005	.13	.06	1.52	.855	21.72	1.326	33.68	1.967	49.96	3.035	77.09	.020	.51	.55	13.97	900	22.86	1.457	37.01	2.120	53.85	3.340	84.84	.030	.76	.663	16.84			1.517	38.53	2.135	54.23	4.240	107.70							1.670	42.42				
INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM																																																																						
.002	.05	.031	.79	.75	19.05	1.067	27.10	1.800	45.72	2.570	65.28																																																																						
.005	.13	.06	1.52	.855	21.72	1.326	33.68	1.967	49.96	3.035	77.09																																																																						
.020	.51	.55	13.97	900	22.86	1.457	37.01	2.120	53.85	3.340	84.84																																																																						
.030	.76	.663	16.84			1.517	38.53	2.135	54.23	4.240	107.70																																																																						
						1.670	42.42																																																																										
<p>NOTES</p> <ol style="list-style-type: none"> 1. Dimensions are in inches 2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm 3. Unless otherwise specified, tolerances are $\pm .010$ (.25 mm) for three place decimals and $\pm .03$ (.76 mm) for two place decimals 4. For design feature purposes, this standard takes precedence over procurement documents referenced herein 5. Reference document shall be of the issue in effect on date of invitation for bid 																																																																																	
P A Army - CR Other Cust AF-85 Navy - EC				International Interest		TITLE CUSHION, EARPHONE		MILITARY STANDARD MS 75128																																																																									
Procurement Specification MIL-H-55353				SUPERSEDES		PAGE 2 OF 2																																																																											

APPROVED REVISED ENTIRE STANDARD REVISED