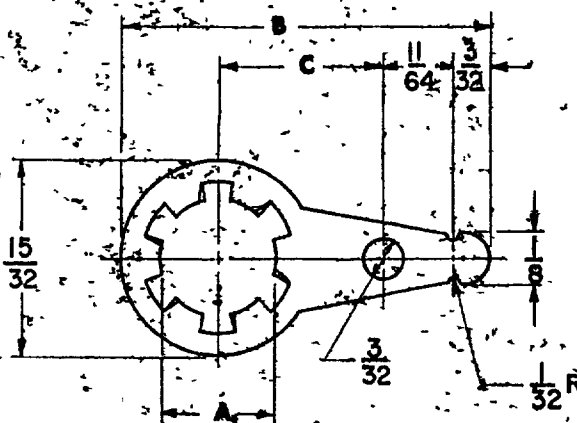


FED SUP CLASS  
5940

.018 ± .008

DASH NUMBER	SCREW SIZE	HOLE DIA A		B	C	AWG SIZE
		MAX	MIN			
1	10	.205	.193	57/64	.397	32 TO 20
2	1/4	.285	.258	57/64	.397	

**MATERIAL: PHOSPHOR BRONZE (1.25% TIN), GRADE E, NO. 502.****FINISH: HOT TIN DIP OR ELECTRO-DEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005.****NOTES: 1. ALL DIMENSIONS IN INCHES, TOLERANCE FRACTIONAL 1/64, UNLESS OTHERWISE SPECIFIED.****2. MAXIMUM BURR OF .005 IS ALLOWABLE.****3. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.****4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.****5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.**

P.A.	MM	TITLE	MILITARY STANDARD
Other Coat	SH	TERMINAL, LUG, SOLDER TYPE. PHOSPHOR BRONZE STAMPING. LOCKING TYPE FLAT, ONE HOLE	MS 77073
PROCUREMENT SPECIFICATION	SUPERSEDED		
ML-1-19639			SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility and no obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data, shall not be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or supplying any rights or permission to reproduce, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEW INTEREST ARMY MU USER INTEREST NAVY: SH AF: 11