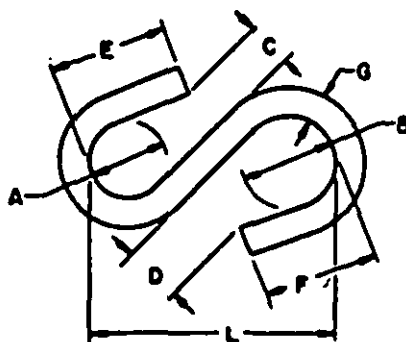


FED. SUP CLASS  
4030

O	WIRE GAGE	14	12	12	11	11	10	8
	DIA (DECIMAL)	.080	.105	.105	.120	.120	.134	.162
L	REACH	27/32	15/16	1-3/32	1-7/16	1-7/16	1-1/16	1-1/16
A		9/32	9/32	25/64	9/32	13/32	11/32	3/8
B		5/16	5/16	13/32	11/16	11/16	13/32	3/8
C		1/8	11/64	3/32	9/32	5/16	3/16	1/4
D		3/16	3/16	1/8	13/32	9/16	1/2	9/32
E		13/32	15/32	1/2	9/16	5/8	17/32	9/16
F		3/8	13/32	15/32	13/16	7/8	1/2	9/16
MATERIAL AND PROTECTIVE COATING		DASH NO.						
STEEL								
UNCOATED		1	11	21	31	41	51	61
CADMIUM		3	13	23	33	43	53	63
BRASS								
UNCOATED		2	12	22	32	42	52	62

**MATERIAL:** Steel, Federal Standard No. 66, SAE 1010-1020.  
Brass, commercial.

**PROTECTIVE COATING:** Cadmium plate in accordance with Specification QQ-P-416, Type II, Class 3.

**TOLERANCE:** Decimals ±.005. Fractions ±1/16.

**DIMENSIONS:** All dimensions are in inches.

**PART NUMBER:** The MS part number consists of the MS number, plus the dash number. Example: MS370C5-21.

**NOTES:** (1) Referenced documents shall be of the issue in effect on date of invitations for bid

P.A.	VC	TITLE	MILITARY STANDARD
Other Code		HOOK, CHAIN-S	MS87006 (WC)
PROCUREMENT SPECIFICATION INDEX	SUPERSEDES	SCALE	SHEET 1 OF 1

NOTE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a Government procurement operation, the United States Government hereby gives no responsibility, on any obligation, or warranty, and the fact that the Government may have furnished, furnished, or is in any way supplying the said drawings, specifications, or other data is not to be interpreted by implication or otherwise as in any manner favoring the holder or any other person or corporation, or conferring any right or privilege in connection with, or in any way affecting the validity of, any patent or other intellectual property right.

This standard is approved by the Department of the Army and is mandatory for use by all military activities as required by the Department of the Army. All other military activities are required to comply with this standard where applicable.