



This Military Standard has been approved by the Mobility Equipment Command, Department of the Army and is mandatory for use by that activity. All other Military activities are required to employ this standard where suitable.

FOR FOREIGN SERVICE LOCOMOTIVES AND CARS

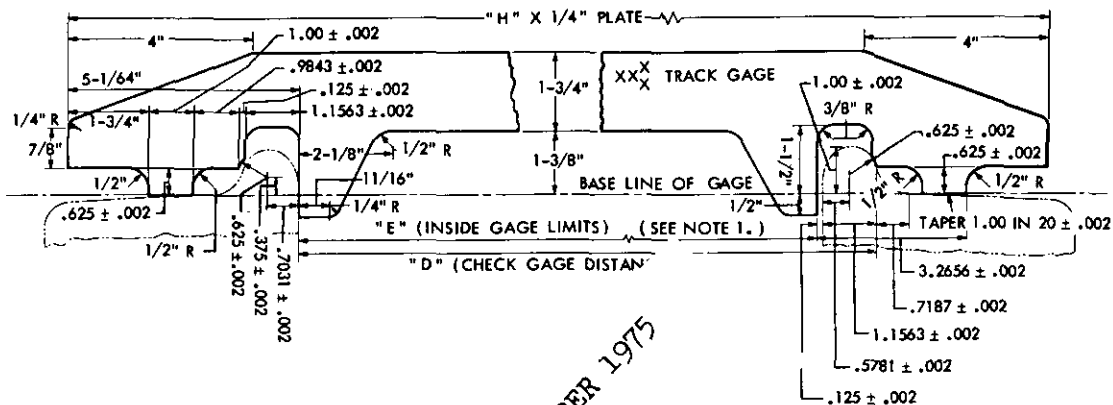

MATERIAL: /

SAE-1020

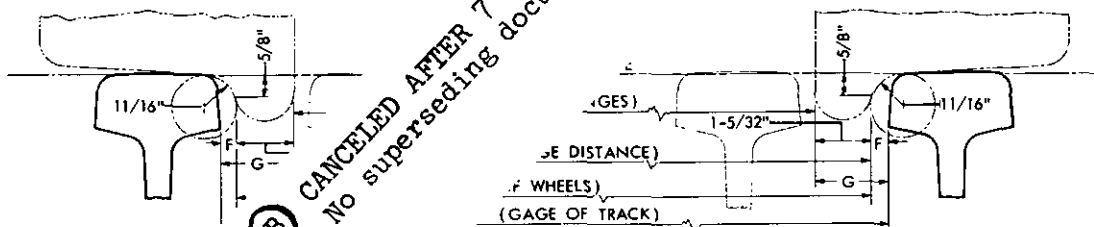

LINE	A	C		D	E	F	G	H	
1	36"	32-7/8	35-3/16	34-1/32	32-3/4	13/32	1-9/16	42-25/32	
2	39-3/8"	36-13/32	38-23/32	37-9/16	36-9/32	21/64	1-31/64	46-5/16	
3	42"	39-1/32	41-11/32	40-3/16	38-29/32	21/64	1-31/64	48-15/16	
4	56-1/2"	53-17/32	55-27/32	54-11/16	53-13/32	21/64	1-31/64	63-7/16	
5	60"	56-11/16	59	57-27/32	56-9/16	1/2	1-21/32	66-19/32	
6	63"	60	62-5/16	61-5/32	59-7/8	11/32	1-1/2	69-29/32	
7	66"	63	65-5/16	64-5/32	62-7/8	11/32	1-1/2	72-29/32	

NOTE 1.
IN MOUNTING STEEL WHEELS WITH WORN
FLANGES, MOUNT TO INSIDE GAGE LIMITS
PLUS 1/8 INCH.

NOTE 2.
THE TOLERANCE OF ALL DIMENSIONS SHALL NOT
EXCEED $\pm 1/64$ INCH, UNLESS OTHERWISE SPECIFIED.

P. A. Army - ME Other Cust NONE	TITLE CHECK GAGE, MOUNTING, STEEL WHEELS, LOCOMOTIVES AND CARS, 36, 39-3/8, 42, 56-1/2, 60, 63, AND 66 IN. GAGES, FOREIGN SERVICE	MILITARY STANDARD	
		MS87012(ME)	
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: TC DWG. 95-D-49	SHEET 1	OF 1

APPROVED 25 February 1964 REVISED (A) 18 August 1966 (B) 7 November 1975