

FED SUP CLASS
5330

USER ACTIVITIES:
ARMY-CR
NAVY-MC
AIR FORCE-82,85
NSA-NS

REVIEWER ACTIVITIES:
DLA-I/S

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

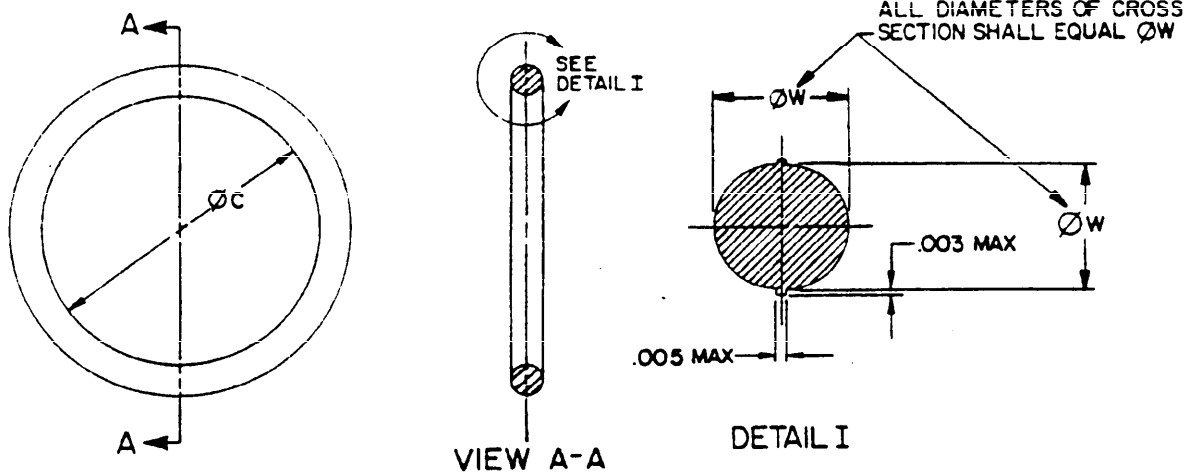


TABLE I DASH NUMBERS AND DIMENSIONS.

DASH NO	Ø C		Ø W		MATERIAL	ENGINEERING DATA
	MIN	MAX	MIN	MAX		
-1	.359	.369	.067	.073	1/	INACTIVE FOR NEW DESIGN USE MS90064-10
-2	.565	.585	.057	.060		INACTIVE FOR NEW DESIGN USE MS90064-11
-3	.669	.679	.100	.106		—
-4	.853	.865	.135	.143		INACTIVE FOR NEW DESIGN USE MS90064-12
-5	1.333	1.343	.089	.095		INACTIVE FOR NEW DESIGN USE MS90064-13
-6	1.545	1.555	.089	.095		INACTIVE FOR NEW DESIGN USE MS90064-14
-7	2.099	2.119	.135	.143		INACTIVE FOR NEW DESIGN USE MS90064-15
-8	2.678	2.688	.110	.120		INACTIVE FOR NEW DESIGN USE MS90064-16
-9	3.960	3.990	.205	.215		INACTIVE FOR NEW DESIGN USE MS90064-17
-10	.421	.431	.067	.073	2/	—
-11	.565	.585	.057	.063		—
-12	.915	.927	.136	.142		—
-13	1.333	1.343	.089	.095		—
-14	1.545	1.555	.089	.095		—
-15	2.099	2.119	.135	.143		—
-16	2.668	2.698	.110	.120		—
-17	4.085	4.115	.205	.215		—

1/ SEE REQUIREMENT 1A

2/ SEE REQUIREMENT 1B

(E) ENTIRE STANDARD REVISED

PA NAVY-EC Other Cast ARMY-CR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE PACKING, PREFORMED, ROUND (FOR USE WITH WAVEGUIDE FLANGES AND DUMMY LOADS)	MILITARY STANDARD MS 90064
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	PAGE 1	OF 2

DD FORM 672-1 COORDINATED

5330-0741

APPROVED 14 SEP 61
REVISED (E) 29 FEB 88

FED. SUP. CLASS
5330

REQUIREMENTS:

1. MATERIAL:
 - A. COMPOSITION RUBBER SHALL BE IN ACCORDANCE WITH MIL-P-25732.
 - B. UNLESS OTHERWISE SPECIFIED, MATERIAL SHALL BE SILICONE RUBBER CLASS 2b, GRADE 50 IN ACCORDANCE WITH II-R-765, FOR WAVEGUIDE FLANGES; AND SILICONE RUBBER IN ACCORDANCE WITH AMS3304 FOR DUMMY LOADS.
2. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
3. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS90064-8

DASH NUMBER

BASIC MS NUMBER

MS90064-8 INDICATES: PACKING, PREFORMED, ROUND (FOR USE WITH WAVEGUIDE FLANGES AND DUMMY LOADS)
DIAMETER "C", 2.678 MIN. 2.688 MAX; DIAMETER "W" .100 MIN.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY-CR
NAVY-MC
AIR FORCE-82,85
NSA-NS

REVIEWER ACTIVITIES:
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

PA NAVY-EC Other Cust ARMY-CR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE PACKING, PREFORMED, ROUND (FOR USE WITH WAVEGUIDE FLANGES AND DUMMY LOADS)	MILITARY STANDARD MS90064
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	PAGE 2	OF 2

DD FORM 672-1 COORDINATED

5330-0741

APPROVED 14 SEP 61 REVISED (E) FOR CHANGES SEE PAGES 72