

INCH-POUND

MS90133F
 11 January 2005
 SUPERSEDING
 MS90133E
 4 May 1973


DETAIL SPECIFICATION SHEET

GASKETS, V - GROOVE;
 PART OF RF COAXIAL CONNECTORS

Inactive for new design after 4 May 1973

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

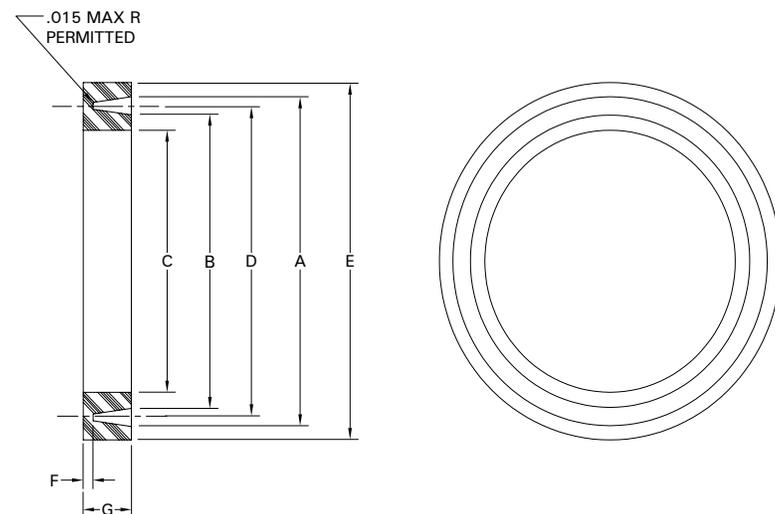

| MS PART NO. | DIMENSIONS | | | | | | |
|-------------|------------|-------|------|-------|-------|------|------|
| | A | B | C | D | E | F | G |
| MS90133-1 | .366 | .292 | .250 | .327 | .390 | .020 | .100 |
| MS90133-2 | .358 | .248 | .210 | .303 | .390 | .020 | .100 |
| MS90133-3 | .695 | .615 | .550 | .655 | .750 | .025 | .125 |
| MS90133-4 | .575 | .495 | .437 | .535 | .635 | .020 | .100 |
| MS90133-5 | 1.082 | 1.000 | .891 | 1.041 | 1.180 | .025 | .125 |
| MS90133-6 | .526 | .446 | .343 | .486 | .635 | .020 | .100 |
| MS90133-7 | 1.082 | 1.000 | .750 | 1.041 | 1.180 | .025 | .125 |

AMSC N/A

FSC 5330

MS90133F

REQUIREMENTS:

1. All dimensions are in inches.
2. Material to be silicone rubber in accordance with A-A-59588, Class 2A, Grade 50 or 60.
3. Unless otherwise specified, tolerances are $\pm .005$.
4. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:

Army - CR
Navy - EC
Air Force - 99

Preparing activity:

DLA - IS

(Project 5330-1285)

Review Activities:

Air Force - 11

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil/>