


FED. SUP CLASS.  
5935

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, not any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

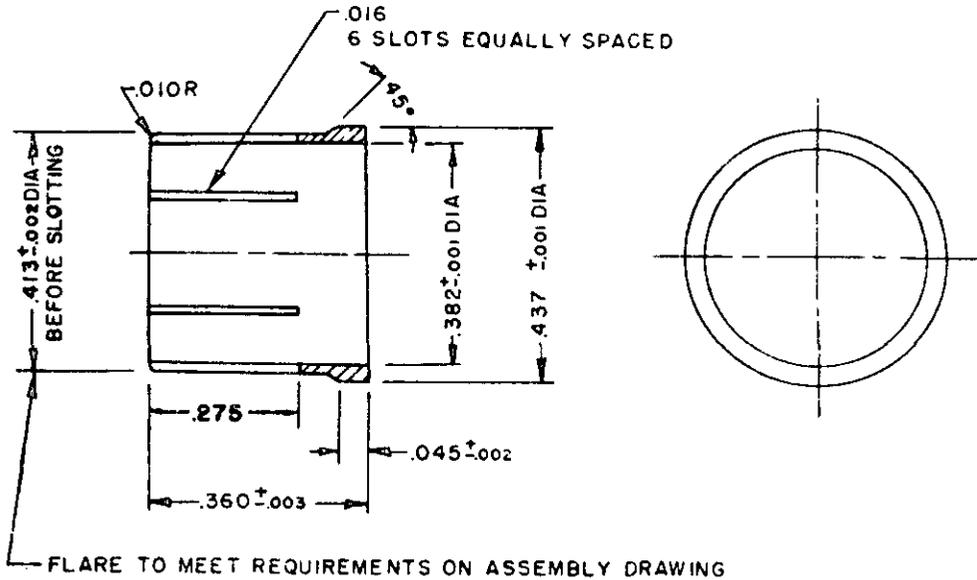

PART NO. MS90218-1 FIIN

NOTES:

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are  $\pm 1/64$  on fractions,  $\pm .005$  on decimals, and  $\pm 1/2^\circ$  on angles.
3. Material shall be beryllium copper conforming to condition H of Specification QQ-C-530.
4. The contact shall be heat-treated to condition HT in salt bath after forming.
5. Concentricity, maximum total indicator reading .004.
6. Referenced specification shall be of the issue in effect on date of invitation for bids.

(B) CANCELED AFTER 13 APRIL 1978. NO SUPERSEDING STANDARD. The application for which the canceled MS 90218 items were originally designed no longer exists. These items are not suitable for use in any other application

CUSTODIANS: Army-Signal Corps Navy-Bureau of Ships Air Force PROCUREMENT SPECIFICATION NONE	<b>MILITARY STANDARD</b>  CONTACT, OUTER; PART OF SERIES C CONNECTORS	<b>MS90218</b>  SHEET 1 OF 1
--	---	------------------------------------

MS Form 233 1 Nov 50

Other interest: Army - OT , Navy - AOrS

APPROVED 7 Dec 1951 REVISED (A) 25 Nov 1953 (B) 13 APR 78