


FED. SUP CLASS
5935User activities: Army -
Navy -
Air Force -Review activities: Army -
Navy -
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

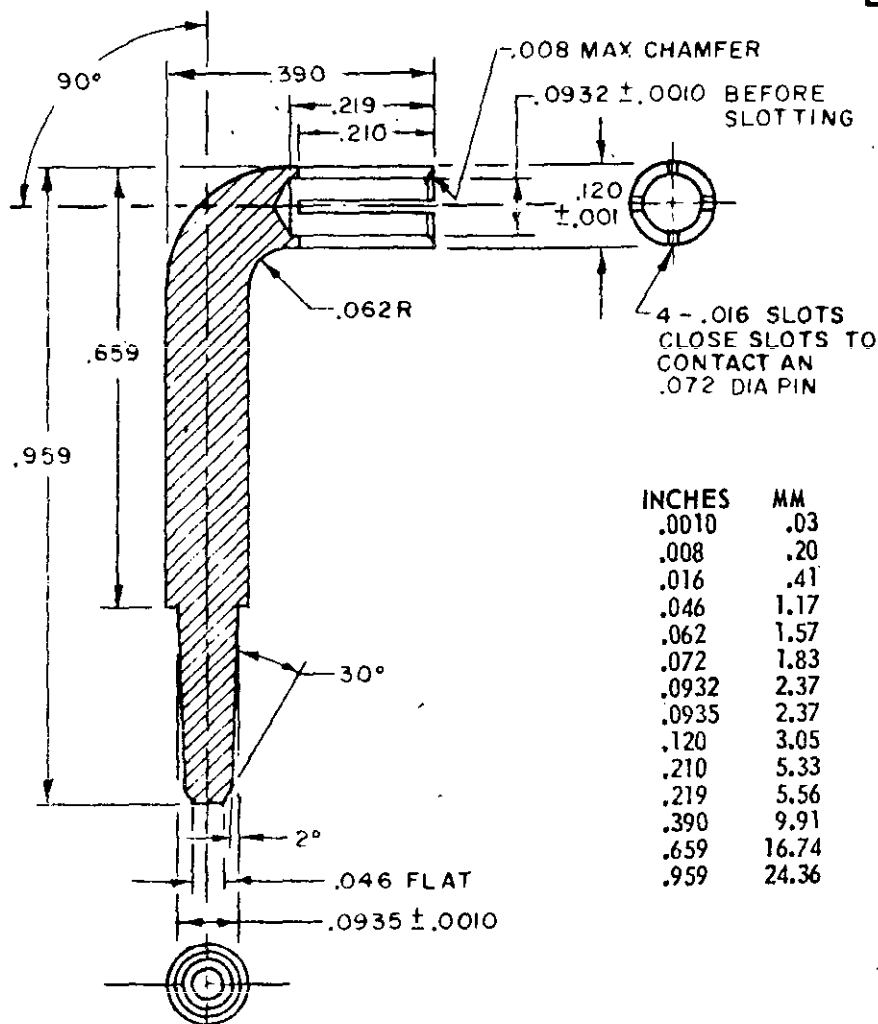

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are .xxx±.005 on decimals and ±½° on angles.
3. The material shall be Phosphor Bronze per QQ-B-750 or Beryllium Copper per QQ-C-530 or QQ-C-533.
4. Referenced document shall be of the issue in effect on date of invitation for bid.
5. Heat treat in Salt bath to cond HT after forming when contact fabricated from Beryllium Copper.
6. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Entire standard revised.

(B) CANCELED AFTER 14 October 1980 NO SUPERSEDING STANDARD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980 - 703-023/4509

P.A. ARMY-EL Other Cust NAVY-SH AF 11	International Interest	TITLE CONTACT, PART OF SERIES C CONNECTORS	MILITARY STANDARD MS90239
Procurement Specification NONE	SUPERSEDES:		PAGE OF

DD FORM 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
1 MAY 73

5935-1540

APPROVED 7 DEC 1951 REVISED (A) 25 NOV 1966 (B) 14 OCT 80