


Reviewer and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Documents.

| <u>REVIEW</u> | <u>USER</u> |
|---------------|-------------|
| ARMY - AV | MC |
| NAVY - AS | |
| USAF - 11,82 | |

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

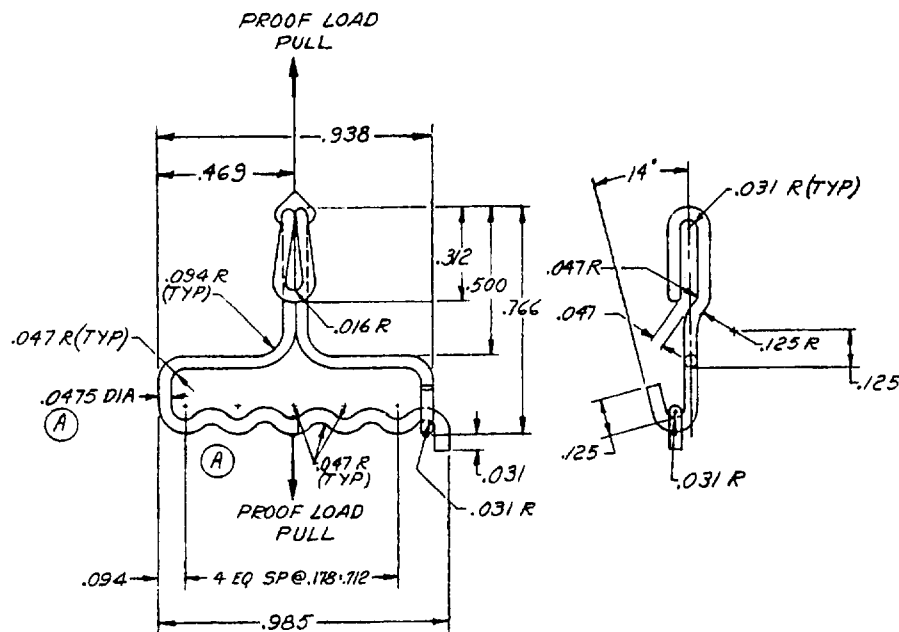

NOTES:

1. MATERIAL: STEEL CORROSION-RESISTING FORM 1, CONDITION B PER QQ-W-423, EXCEPT TENSILE STRENGTH MAY BE 220,000. PSI MINIMUM.
2. REMOVE ALL BURRS AND SHARP EDGES ON ENDS OF WIRE.
3. THE WAVY BASE MUST BE PARALLEL WITH THE SHOULDERS AND SQUARE WITH HOOK WITHIN .015.
4. WHEN HOOK IS OPEN, THE END AND EYE SHALL BE AT LEAST .250 APART.
5. HOOKS SHALL BE SUBJECTED TO A PROOF LOAD OF 25 LBS. IN THE DIRECTION INDICATED BY THE ARROWS. A 3/4 INCH WIDE WEBBING OR SUITABLE SUBSTITUTE SHALL BE USED TO DISTRIBUTE THE LOAD ACROSS THE WIDTH OF THE WAVY BASE. WHEN PROOF LOAD IS APPLIED, THE WAVY BASE MAY DEFLECT BUT SHALL NOT DISENGAGE EYE.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS \pm .015, ANGLES \pm 2°.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

| | | |
|--|--|------------------------|
| P.A. <i>ARMY - GL</i> | TITLE | MILITARY STANDARD |
| Other Code <i>NAVY - AS</i> <i>USAF - 11</i> | <i>HOOK, BAND, PARACHUTE CONTAINER OPENING</i> | MS <i>90295</i> |
| PROCUREMENT SPECIFICATION <i>NONE</i> | SUPERSEDES: <i>USAF DWG 46A3155</i> | SHEET / OF / |

APPROVED 3 MAR 65 REVISED (A) 11 MAY 1967