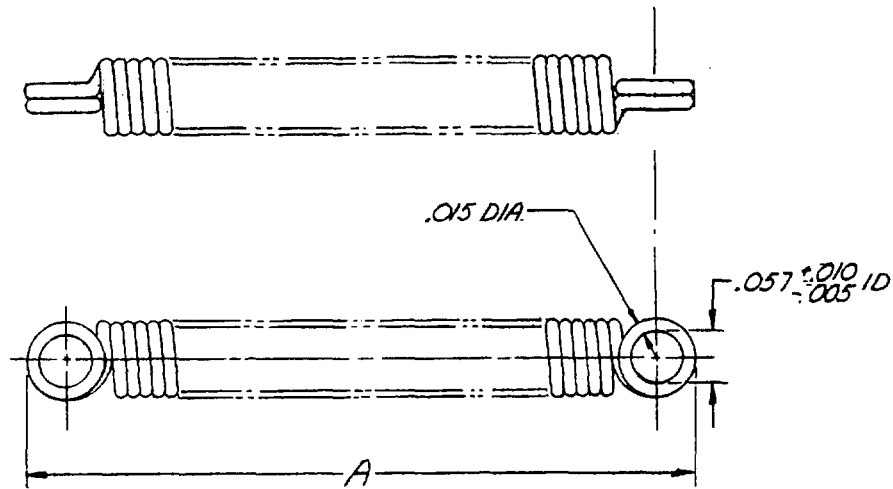


FED. SUP CLASS
1670

DASH NO.	A	SUPERSEDES
-1	3 $\frac{1}{2}$	USAF-46A3154-4
-2	5 $\frac{1}{4}$	NPU-56-180-7
-3	7 $\frac{7}{8}$	NPU-56-180-5
-4	9	NPU-56-180-9
-5	11	USAF-46A3154-1
-6	12 $\frac{1}{2}$	USAF-46A3154-3
-7	16 $\frac{1}{2}$	USAF-46A3154-2
-8	20	
③ -9	6 $\frac{1}{2}$	

NOTES:

1. MATERIAL: STEEL WIRE, CORROSION-RESISTING, FORM I, CONDITION B, PER QQ-W-423.
2. STRESS RELIEVE AT 500°-550°F FOR 20 MINUTES AFTER FORMING.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. TOTAL NUMBER OF COILS PER INCH TO BE 66.
5. COILS SHALL BE TIGHTLY WOUND AND LOOPS SHALL BE IN LINE.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm \frac{1}{32}$

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

REVIEWED BY:
ARMY - AV
NAVY - AS
NAF - 11,82

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-GL Other Cust NAVY-AS USAF-II	TITLE SPRING, BAND, PARACHUTE CONTAINER OPENING	MILITARY STANDARD MS 90296
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF 46A3154, NPU 56-180	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 3 MARCH 65 REVISED ① 28 FEB 1967 ② 11 MAY 1967 ③ 29 JAN 68