


FED. SUP CLASS 1660		
<p style="text-align: center;">SECTION A-A</p> <p style="text-align: center;">-1 ASSEMBLY</p>		
<p>NOTES:</p> <ol style="list-style-type: none"> 1. MATERIAL: BODY, ALUMINUM ALLOY CASTING, SPECIFICATION QQ-A-596, CLASS 8. BLADE, PLATE, ALUMINUM ALLOY, SPECIFICATION QQ-A-250/2B, CONDITION HALF HARD. KNOB, ALUMINUM ALLOY, SPECIFICATION QQ-A-267, CONDITION T4 OR SPECIFICATION QQ-A-268 CONDITION T4. SPRING, STEEL, SPECIFICATION MIL-S-7947, CONDITION 1 OR 2. INSERT, RUBBER, SPECIFICATION MIL-R-6855, CLASS II, GRADE 40. PACKING, RUBBER, SPECIFICATION MIL-R-6855, CLASS II, GRADE 70. 2. FINISH: BODY, PLATE, BLADE, KNOB, ANODIZE IN ACCORDANCE WITH SPECIFICATION MIL-A-8625, DYED SAGE GREEN. PRIOR TO ANODIZING, ALL EXTERNAL SURFACES OF THE BODY SHALL BE FINISHED 125/ AND ALL MACHINED SURFACES SHALL BE FINISHED 63/ SPRING, CHROMIUM PLATE, SPECIFICATION QQ-C-320, CLASS 1, TYPE I. 3. INTERPRET DRAWING IN ACCORDANCE WITH STANDARDS PRESCRIBED BY SPECIFICATION MIL-D-70327. 4. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. 5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID. 6. HEAT TREATMENT: SPRING, HARDEN AND DRAW AT 750° F. 7. REMOVE ALL BURRS AND SHARP EDGES. 8. PRESS THROTTLE ASSEMBLY OVER MOUNTED "O" RING. GREASE "O" RING SLIGHTLY. THIS SHALL BE THE LAST STEP. (DISASSEMBLY IS ONLY POSSIBLE BY DESTROYING "O" RING). 9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°. <p style="text-align: center; margin-top: 20px;">Ⓐ DENOTES CHANGE</p>		
P.A. NAVY-Wepa Other Cost	TITLE Flow Control Assembly, Quick Disconnect CWU-33/P ANTI-EXPOSURE SUIT	MILITARY STANDARD MS90326(Wep)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 3

This standard has been approved by the BUREAU OF NAVAL WEAPONS
 Department of the NAVY and is mandatory for use by
 that activity. All other military activities are required
 to comply with this standard where applicable.

APPROVED 8 June 1964 REVISED Ⓐ 12 APRIL 1977

FED. SUP CLASS
1660

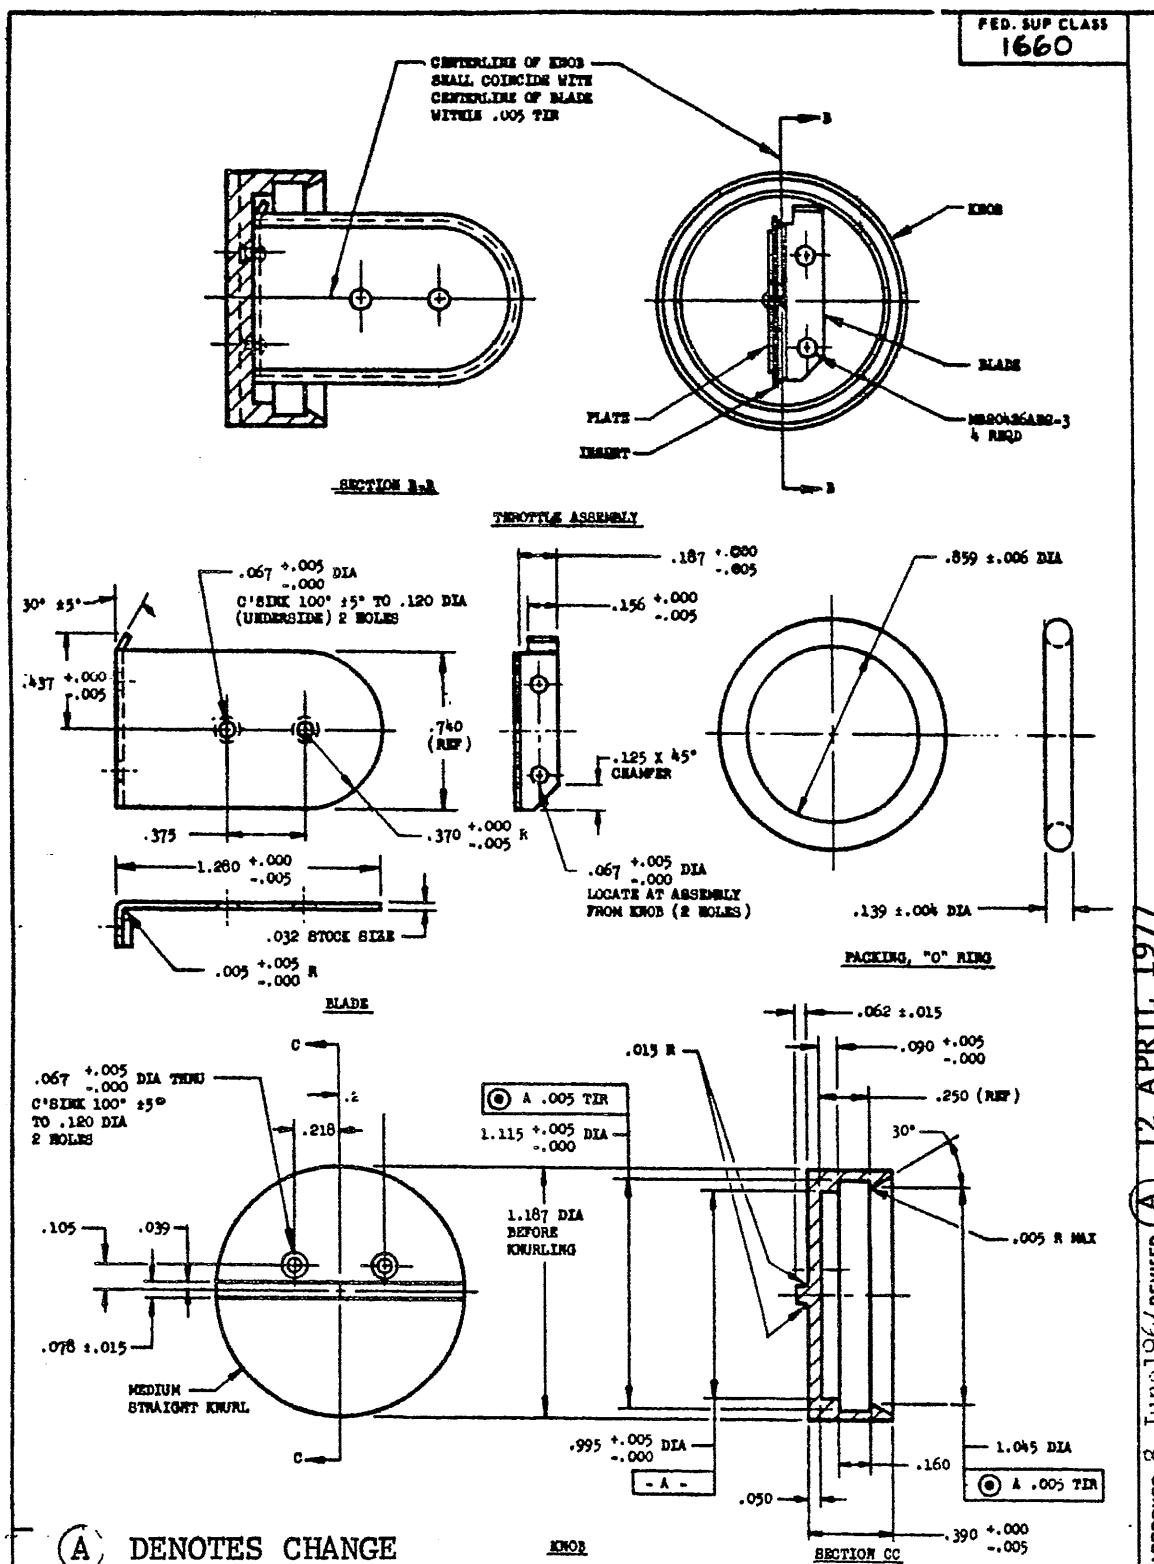

APPROVED 8 June 1964 (A) 12 APRIL 1977

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P A. NAVY-Wept

Other Cust

TITLE

Flow Control Assembly, Quick Disconnect
CWU-33/P ANTI-EXPOSURE SUIT

MILITARY STANDARD

MS 90326(Wep)


PROCUREMENT SPECIFICATION

SUPERSEDES

SHEET 2 OF 3

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

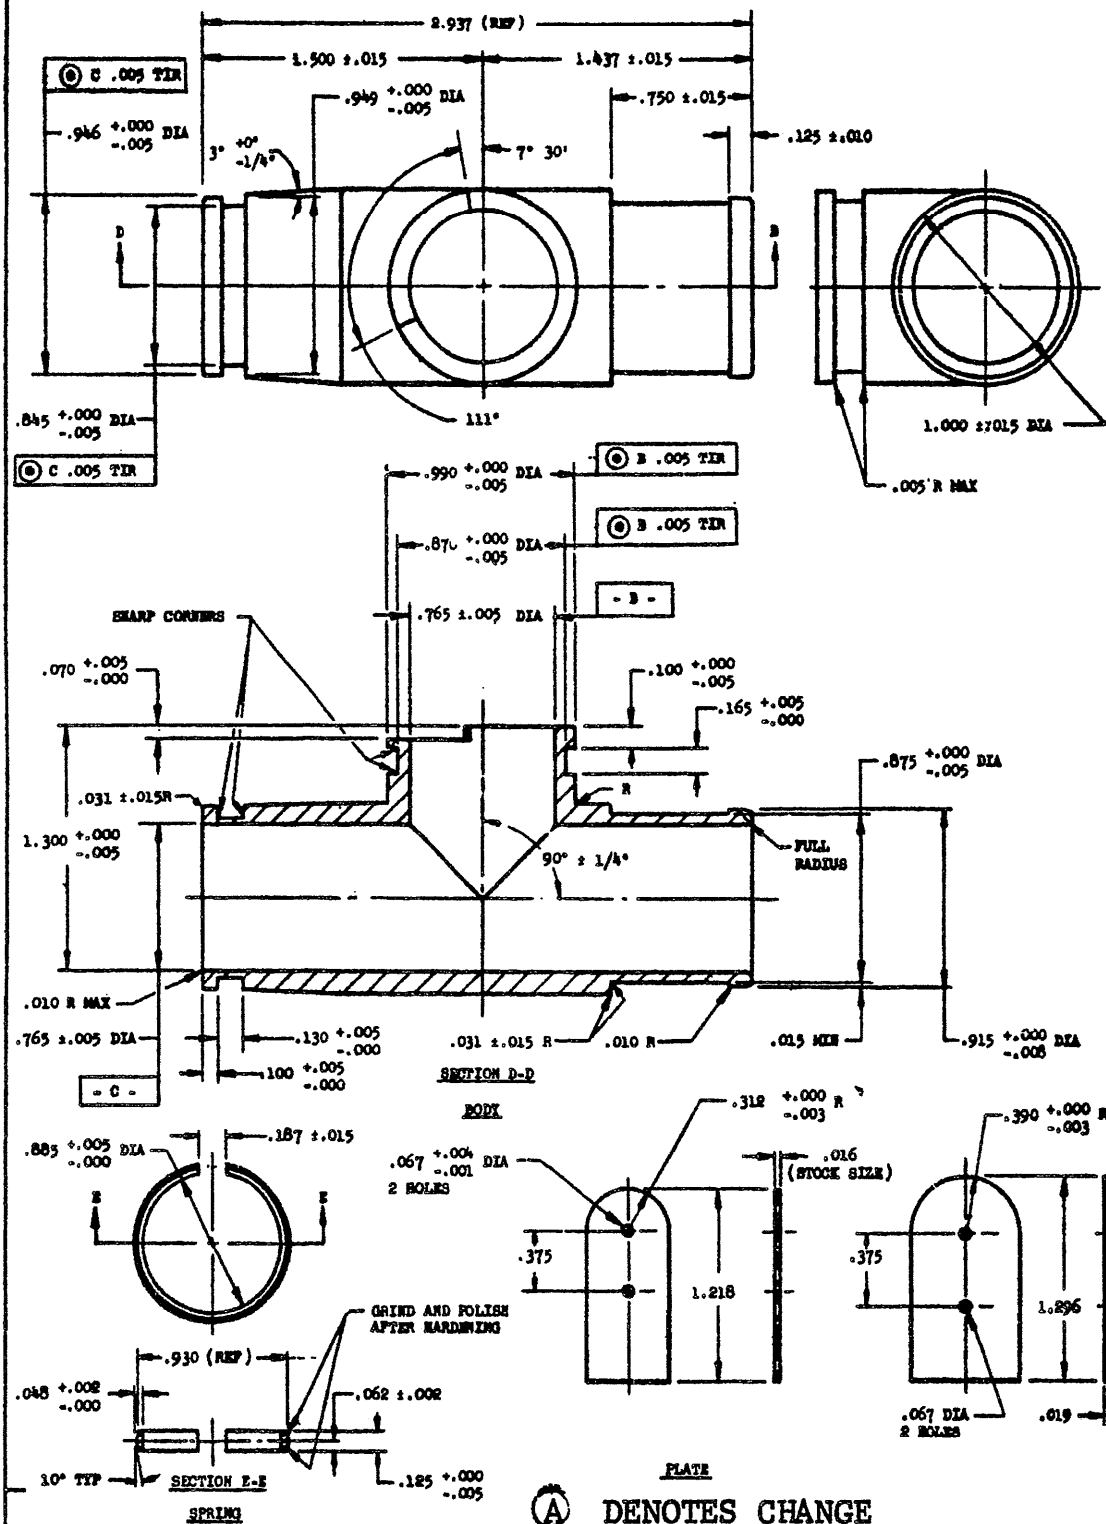FED. SUP CLASS
1660

This standard has been approved by the BUREAU OF NAVAL WEAPONS
Department of the NAVY and is mandatory for use by
that activity. All other military activities are required
to employ this standard where feasible.

P.A. NAVY-Meps Other Cust	TITLE Flow Control Assembly, Quick Disconnect, CWU-33/P ANTI-EXPOSURE SUIT	MILITARY STANDARD MS 90326(Wep)
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 3 OF 3

DD FORM 672-1 (limited circulation)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE 111 14111

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-0 20/3399

APPROVED 8 June 1964, REVISED (A) 12 APRIL 1977