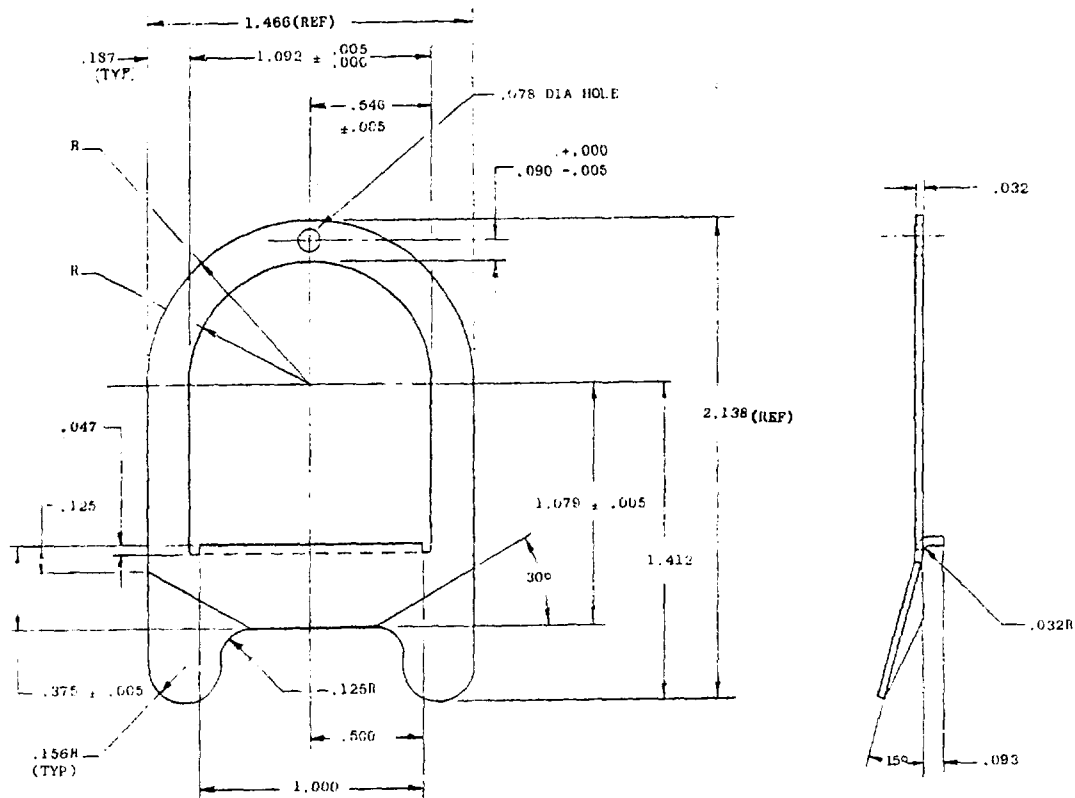


FED. SUP CLASS  
B475

## NOTES:

1. MATERIAL: SPRING, LOCK, CORROSION RESISTING STEEL, IN ACCORDANCE WITH QQ-S-786, CL 301, COND FULL HARD.
2. FINISH: SPRING LOCK TO BE PASSIVATED IN ACCORDANCE WITH QQ-P-35.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS  $\pm .010$ , ANGLES  $\pm 0^\circ 30'$ .
4. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH MIL-STD-R.
5. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
6. USAGE: INTENDED FOR USE ON MS17967, MS17968, MS17970.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

This standard has been approved by the BUREAU OF NAVAL WEAPONS  
Department of the NAVY and is mandatory for use by  
that activity. All other military activities are required  
to employ this standard where suitable.

P.A. NAVY-WP Other Cust	TITLE  SPRING, LOCK FOR NOZZLE ASSEMBLY	MILITARY STANDARD <b>MS90369(WP)</b>
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1