


FED. SUP CLASS  
4240REVIEWER  
AF-84  
ARMY-MO

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODDSS.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments &amp; Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

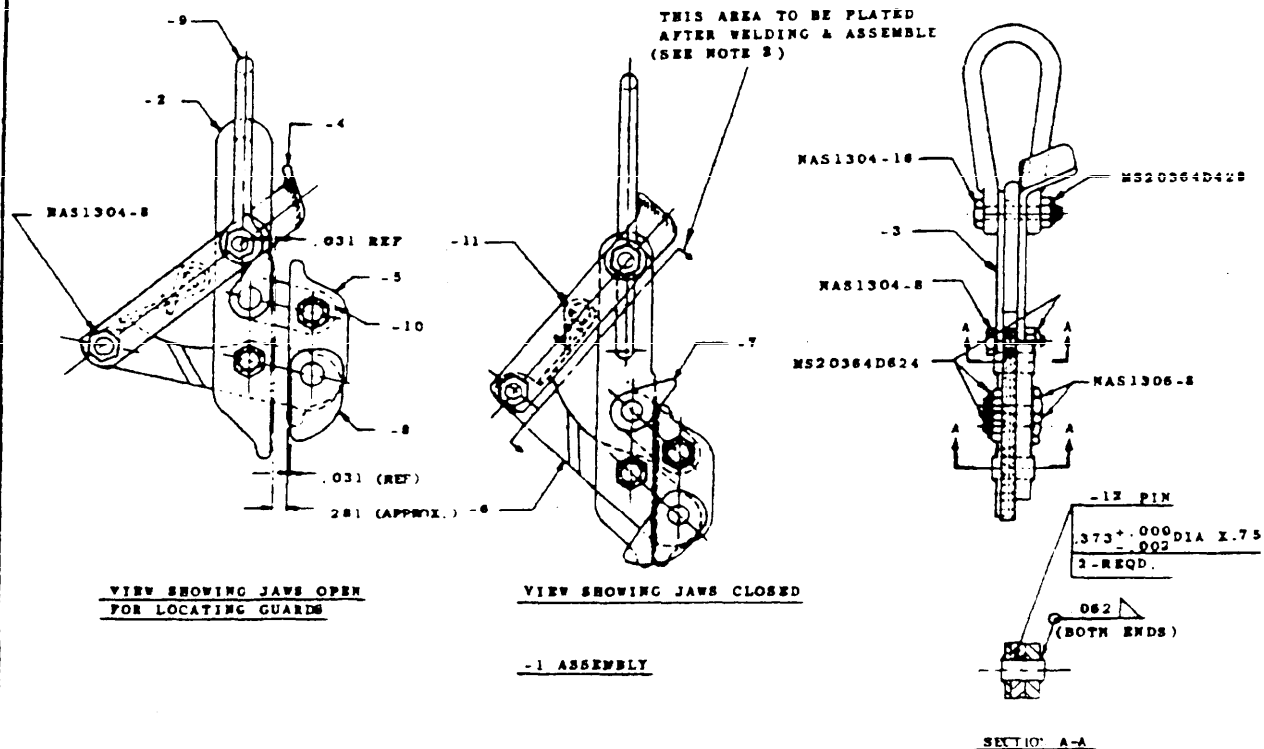

## NOTES

1. ASSEMBLY SHALL BE MANUFACTURED IN ACCORDANCE WITH MIL-R-8592/1.
2. ALL PARTS ARE TO BE CADMIUM PLATED PRIOR TO ASSEMBLY. -11 SHALL BE STRESS RELIEVED PRIOR TO PLATING IN ACCORDANCE WITH QQ-P-416. -1 ASSEMBLY SHALL BE PLATED AFTER WELDING AND ASSEMBLY BELOW THE AREA MARKED. CARE SHALL BE EXERCISED TO INSURE THAT -11 IS NOT REPLATED. FINISH SHALL BE IN ACCORDANCE WITH QQ-P-416, TYPE 1, CLASS 1.
3. FINISH ALL OVER  $\sqrt{125}$  SURFACE ROUGHNESS SHALL BE IN ACCORDANCE WITH MIL-STD-10.
4. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS.
5. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS  $\pm .015$ , ANGLES  $\pm 1^\circ$ . DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH MIL-STD-8.
6. CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT. ARC AIR STD 51/1 "THE USE OF HORSE COLLAR (STROP) TYPE HELICOPTER HOISTING GEAR" AND STANAG 1295 "HORSE COLLAR (STROP) TYPE HELICOPTER HOISTING GEAR". WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.





FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. NAVY VP Other Code AF-84 ARMY-MO	INTERNAT- IONAL INTEREST	TITLE  GESP, CABLE, RESCUE	MILITARY STANDARD  MS 90382
PROCUREMENT SPECIFICATION MIL-STD-8888	SUPERSEDES DDPDS DND 88A13881	SHEET 1 OF 3	


REVIEWED  
AF-84  
ARMY-MO

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODDS.

This military is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

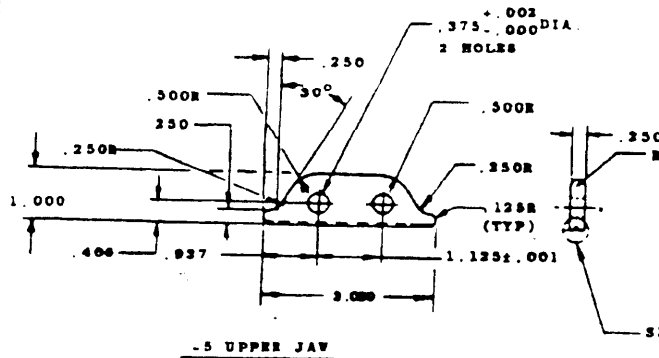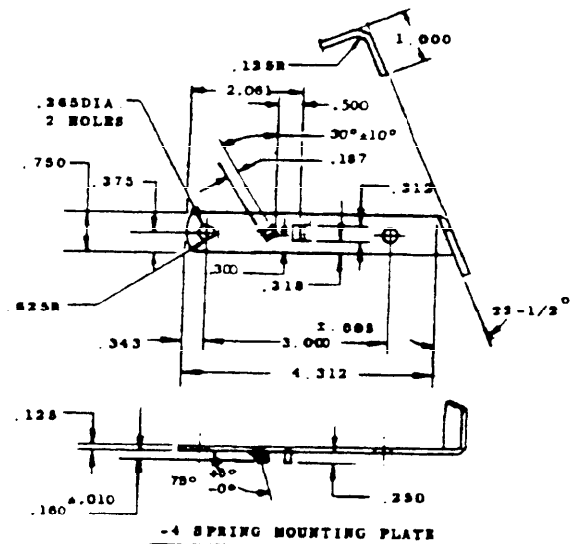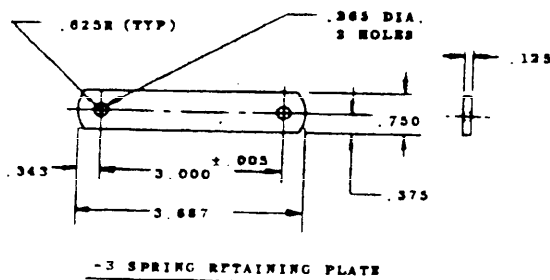
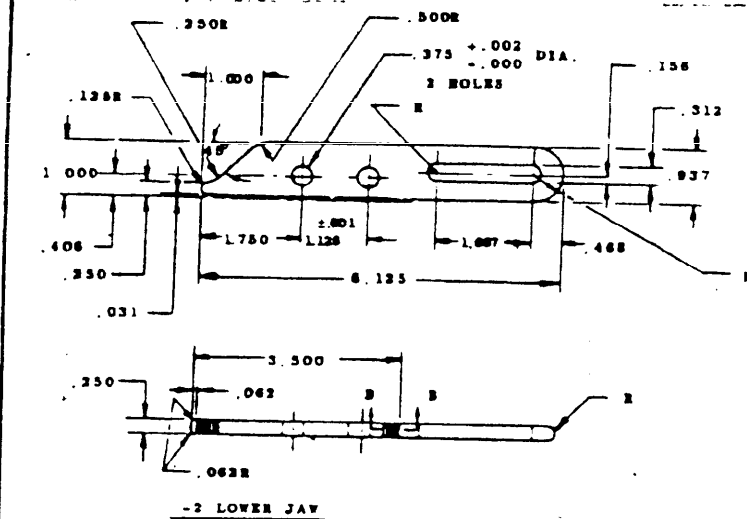


SEE DETAIL "C"




MATERIAL STEEL CONFORMING TO MIL-R-8982 FOR -2, -3, -4 & -5.


P.A. NAVY-WP Other Code AF-84 ARMY-MO	INTERNATIONAL INTEREST	TITLE  GRIP CABLE, RESCUE	MILITARY STANDARD  MS90382
PROCUREMENT SPECIFICATION MIL-R-8982	SUPERSEDES:  SUPERSEDES DWG 60A138D1	SHEET 3 OF	

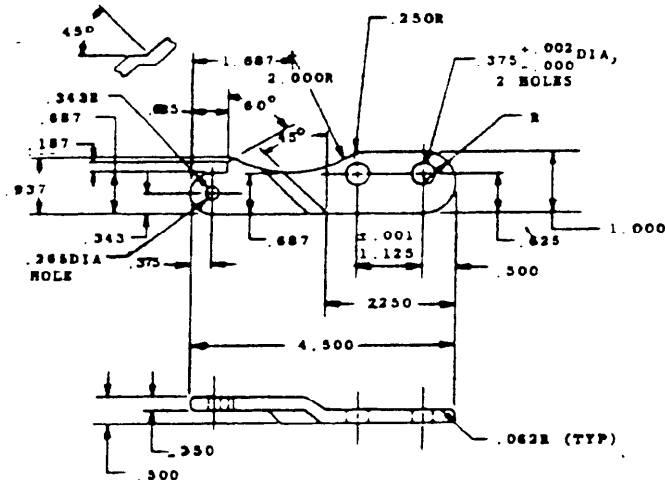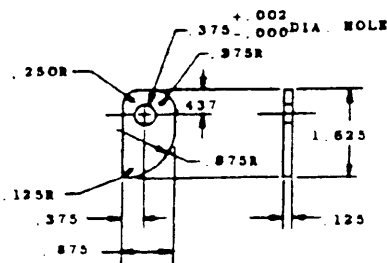FED. SUP CLASS  
4240REVISED  
17-84  
ARMY-MONOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE  
OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES  
TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON  
THE INFORMATION IN THE CURRENT DODIES.This military drawing is approved by the Department of Defense and is  
mandatory for use by all Departments & Agencies of the Department  
of Defense. Selection for all new engineering and design applications  
and for repetitive use shall be made from this document.-6 ARM  
1/4 X 1 X 4-3/4


-8 UPPER GUARD

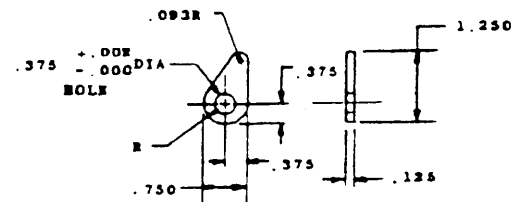


-7 LOWER GUARD

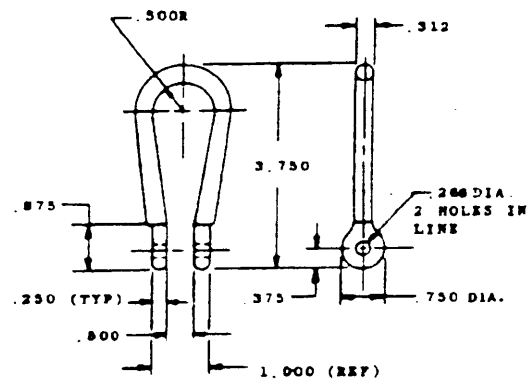

-9 SHACKLE

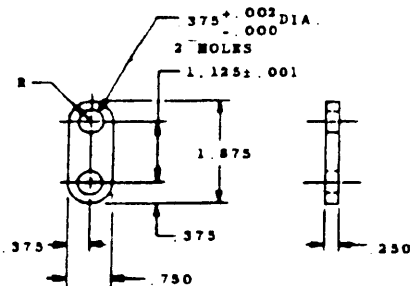

-10 LINE

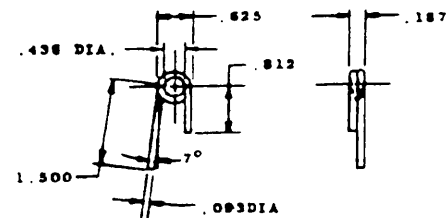1-1/2 ACTIVE COILS  
ALL SPRING  
(SEE NOTE 2)MATERIAL: FOR -6, -7, -8, -10 & -12 STEEL CONFORMING TO MIL-B-7982.  
FOR -9, STEEL CONFORMING TO MIL-B-8675.  
FOR -11, STEEL CONFORMING TO QQ-B-428, TYPE 1.P.A.  
NAVY-WP  
Other Code  
17-84  
ARMY-MOINTERNAT-  
IONAL  
INTEREST

TITLE

GRIP, CABLE, RESCUE

MILITARY STANDARD

MS90382

PROCUREMENT SPECIFICATION  
MIL-B-8898

SUPERSEDES

DOWNS DDC 60A138D1

SHEET 3 OF

