


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by all Departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

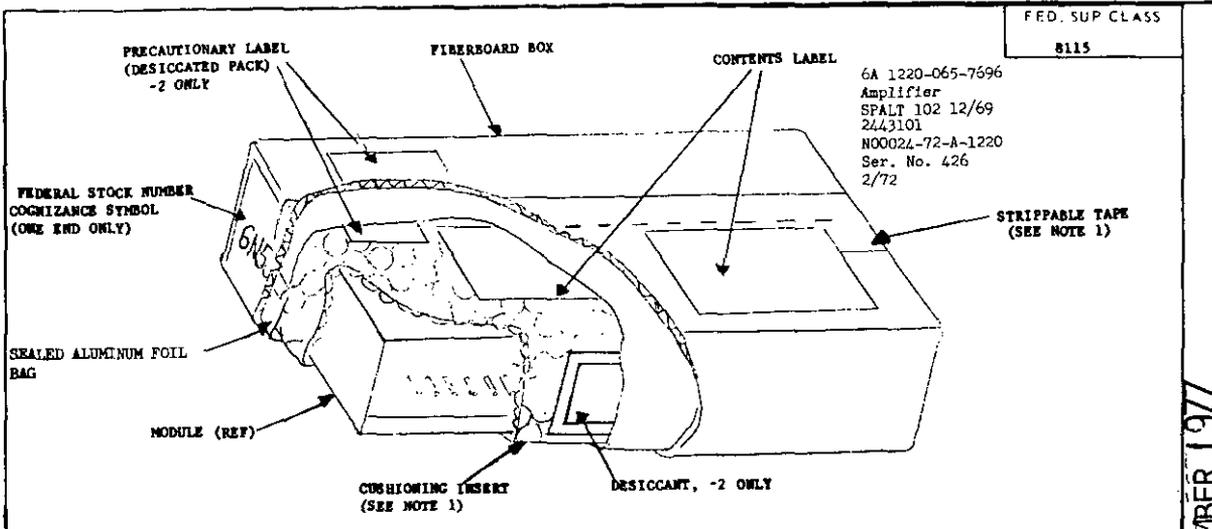

FED. SUP CLASS
8115

6A 1220-065-7596
Amplifier
SPALT 102 12/69
2443101
N00024-72-A-1220
Ser. No. 426
2/72

DASH NO.	DESCRIPTION OF BOX CONTENTS	MIL-STD-726, CODE TABLE IIC
-1	METHOD IA-8 OF MIL-P-116	GT
-2	METHOD IIC OF MIL-P-116 (DESICCATED PACK)	GU
ITEM WEIGHT RANGE (POUNDS)	CUSHIONING THICKNESS (INCHES)	
Over 10 but less than 15	1/2	
Over 15 but less than 25	1	
Over 25 but less than 40	1-1/2	
Over 40 but less than 55	2	
Over 55 but less than 70	2-1/2	
Over 70 through 100	3	

- NOTES:
- (C) 1. MATERIAL: (a) CUSHIONING INSERT, PPP-C-795, CLASS 1, THICK THICKNESS.
(b) CONTENTS LABEL (SEE PARA. 6).
(c) PRECAUTIONARY LABEL, MIL-STD-129, METHOD II (-2 ONLY)
(d) ALUMINUM FOIL BAG, MIL-B-117, TYPE I, CLASS E, STYLE 1.
(e) BOX, FIBERBOARD, PPP-B-636, TYPE CF OR SF, DOMESTIC OR WEATHER RESISTANT CLASS AS SPECIFIED (SEE PARA. 5).
(f) TAPE, PPP-T-45, TYPE II, CLASS 1 (STRIPPABLE).
(g) DESICCANT, MIL-D-3464, TYPE II. DESICCANT BAGS SHALL HAVE A MINIMUM 275 PSI BURSTING STRENGTH WHEN TESTED IN ACCORDANCE WITH METHOD 5122 AND SHALL HAVE A MINIMUM TEARING STRENGTH OF 125 PSI WHEN TESTED IN ACCORDANCE WITH METHOD 5134 OF FEDERAL TEST METHOD STD NO. 191.
 - 2. CLEANING, PROCESS C-1 OF MIL-P-116.
 - 3. ASSEMBLY: FOR -1 PACKAGE IN ACCORDANCE WITH METHOD IA-8 OF MIL-P-116 UTILIZING HEAT SEALED ALUMINUM FOIL BAG INSIDE BOX. FOR -2 PACKAGE IN ACCORDANCE WITH METHOD IIC OF MIL-P-116 UTILIZING HEAT SEALED ALUMINUM FOIL BAG INSIDE BOX.
 - 4. PADS, CELLS OR DIE CUTS FABRICATED FROM DOMESTIC FIBERBOARD, PPP-F-320, SHALL BE ADDED, AS REQUIRED, TO PROVIDE EVEN DISTRIBUTION OF WEIGHT AND A COMPACT NON-SHIFTING LOAD.
 - 5. UNIT CONTAINER FOR ITEMS WEIGHTING 40 POUNDS OR MORE SHALL BE CLASS WEATHER RESISTANT.
 - (C) 6. MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-129. THE MARKING FORMAT SHALL BE AS FOLLOWS:

FEDERAL STOCK NO. OR ACTIVITY CONTROL NO.
NOMENCLATURE
SPALT OR MODIFICATION NO. AND DATE
MANUFACTURER'S NAME
CONTRACT NUMBER
MFR DWG OR PART NO.
SERIAL NO.
DATE PACKAGED

MIL-STD-129 MARKING AND ANY ADDITIONAL MARKING REQUIRED SHALL BE ON BOTH CONTENTS LABELS (ONE ON THE BAG AND ONE ON THE OUTSIDE OF THE BOX). PRECAUTIONARY LABELS, -2 ONLY, SHALL BE SECURED (ONE ON THE BAG AND ONE ON THE OUTSIDE OF THE BOX). IN ADDITION, THE FEDERAL STOCK NUMBER SHALL BE MARKED ON ONE END OF THE BOX.
 - 7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
 - 8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) CANCELLED Use MS90363 of 22 JUNE 1977

P.A. NAVY - SA	TITLE	MILITARY STANDARD
Other Cust ARMY - GL AIR FORCE - 69	BOX, FIBERBOARD, WITH CUSHIONING INSERT, LIMITED RE-USE (FOR ITEMS OVER 10 POUNDS TO 100 POUNDS INCLUSIVE)	MS 90407A
PROCUREMENT SPECIFICATION	SUPERSEDES: MS 90407(SA)	SHEET 1 OF 1

DD FORM 672-1 SEP 67

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 13 APRIL 1966 REVISED (A) 29 FEB 1968 (B) 20 MAR 1970 (C) 3 APRIL 1972 (D) 15 DECEMBER 1977