


NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT EDITIONS.

USER INTEREST:  
NAVY - CC  
ARMY -  
AIR FORCE -

REVIEWER INTEREST:  
NAVY - AS  
ARMY - ME  
AIR FORCE - S2  
OTHER - NSA

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

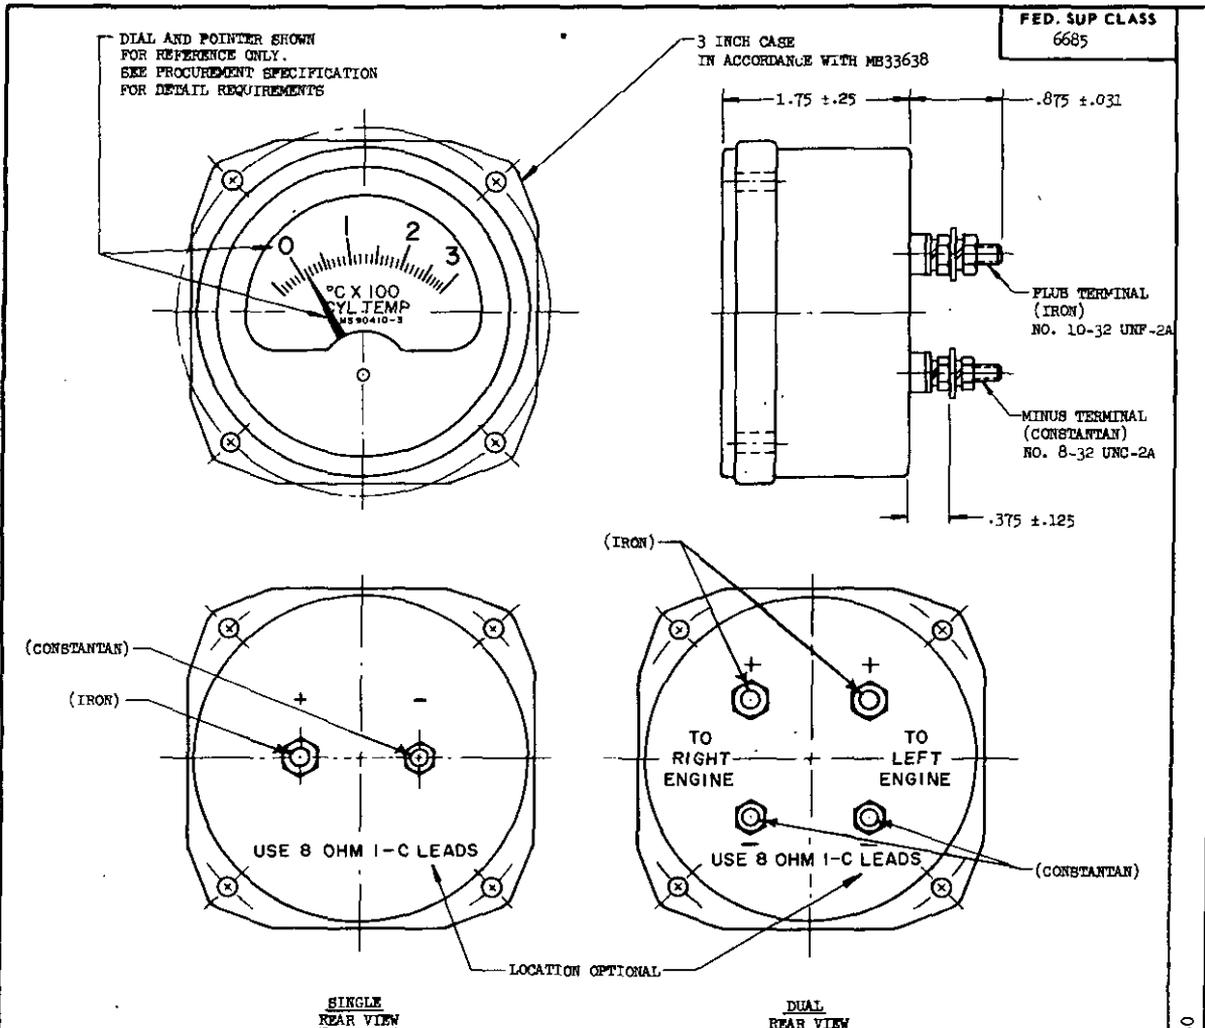

DASH NO.	TYPE	MARKING-DIAL AND POINTER	INTERCHANGEABLE WITH AND REPLACES
-1	SINGLE	FLUORESCENT	AN5536-1A
-2	DUAL	FLUORESCENT	AN5536-2A
-3	SINGLE	WHITE	
-4	DUAL	WHITE	

**NOTES:**

- DIMENSIONS IN INCHES.
  - DISTANCE BETWEEN TERMINAL CENTERS 1.125 ± .375. TERMINALS OF SINGLE INDICATOR MAY BE LOCATED .625 INCH MAX ABOVE OR BELOW HORIZONTAL CENTER LINE.
- \* CERTAIN PROVISIONS (DIAL INFORMATION AND CASE) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS ASCC AIR STD 10/2, 10/7 AND STANAGS 3319, 3335. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

Ⓐ CANCELLED 21 APRIL 1980 . NO SUPERSEDING DOCUMENT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P. A. NAVY - AS Other Cust ARMY - ME AF - 82	INTERNATIONAL INTEREST *	TITLE	<b>MILITARY STANDARD</b> <b>MS90410</b>
		INDICATORS; TEMPERATURE, THERMOCOUPLE	
PROCUREMENT SPECIFICATION MIL-I-7884	SUPERSEDES:	AN5536	SHEET 1 OF 1