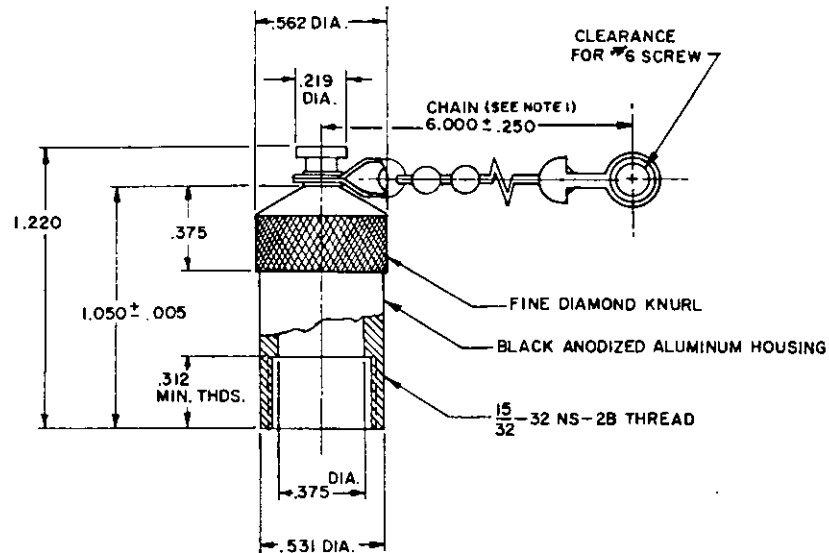


FED. SUP CLASS
5930

NOTES:

1. Material: Cover- Aluminum Alloy Specification QQ-A-351, or QQ-A-591, Composition 1, 2, 5, 5A, 10, 11. Finish- Black Anodize Specification MIL-A-8625B, Type 1, Class 2.
Chain- Stainless Steel Weldless Bead Chain with fastener both ends, Fed. Specification RR-C-271, Type II, Class 5, Trade number 6.
Chain End Fastener- Commercial Grade of Stainless Steel. Chain end fasteners shall be of heavy gauge stainless steel, the ultimate strength of which shall be at least 125% that of the minimum chain strength.
2. Threads in accordance with Specification MIL-S-7742.
3. Remove all burrs and sharp edges.
4. All dimensions are in inches. Tolerance, unless otherwise specified, is $\pm .015$.
5. Intended Use: To provide positive guard for toggle lever of single hole mounting switches. The guard is threaded onto the switch bushing & guards the switch in the center position. To operate switch, the guard must be unthreaded and removed from switch.
6. PART NUMBER: MS 90450-1

Ⓐ CANCELED AFTER 28 FEBRUARY 1986 NO SUPERSEDING STANDARD

Ⓐ DENOTES CHANGES

P.A. NAVY-AS Other Cust	TITLE GUARD, THREADED CAP, TOGGLE SWITCH	MILITARY STANDARD MS 90450(AS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1