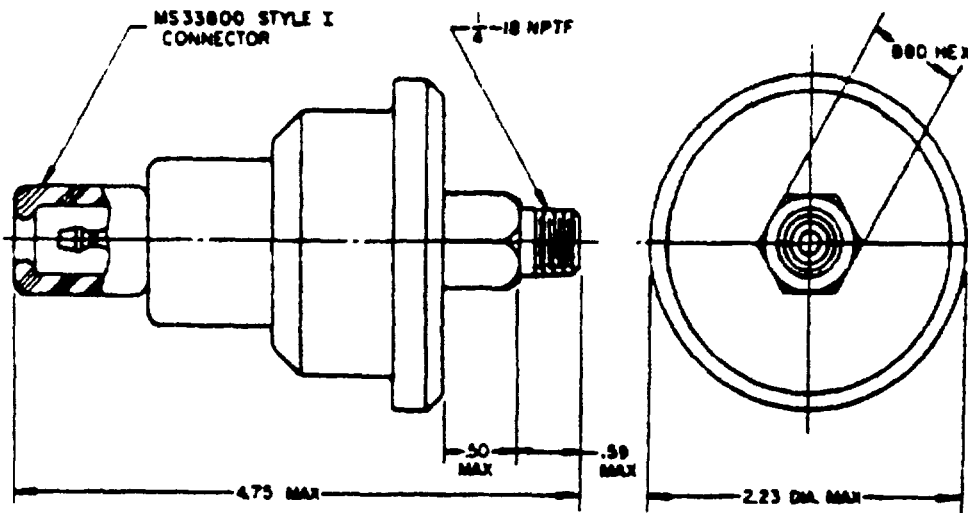


PDB SUP CLASS  
5930

MS PART NO.	ACTUATING PRESSURE	FORMER PART NO	TYPE	OVERLOAD PRESSURE PSI
MS 90530 -1	4-8 PSI	NONE	I	80
MS 90530 -2	9-13 PSI	8376927		80
MS 90530 -3	15-19 PSI	8380688		80
MS 90530 -4	23-27 PSI	NONE		80
MS 90530 -5	28-32 PSI	8376925		100
MS 90530 -6	44-50 PSI	8675767		100
MS 90530 -7	60-65 PSI	NONE		180
MS90530-8	4-8 PSI	NONE	II	
MS90530-9	9-13 PSI	10914602		
MS90530-10	15-19 PSI	NONE		
MS90530-11	23-27 PSI	NONE		
MS90530-12	28-32 PSI	NONE		
MS90530-13	44-50 PSI	NONE		
MS 90530-14	60-65 PSI	NONE		

## NOTE

1. TYPE I: SUFFICIENTLY LOW PRESSURE CLOSING CONTACTS  
TYPE II: SUFFICIENTLY HIGH PRESSURE CLOSING CONTACTS
2. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE : .015 ON DECIMALS
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN
4. REFERENCED DOCUMENTS SHALL BE IN EFFECT ON DATE OF INVITATION FOR BID
5. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREIN BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS

① ENTIRE STANDARD REVISED

ARMY-AT Sub-Cost	INTERNATIONAL INTEREST	TITLE SWITCH, PRESSURE-WARNING, SPST, WATERPROOF, 24 VOLT, DC	MILITARY STANDARD MS90530
PROCUREMENT SPECIFICATION ML-5-122	UNPUBLISHED	SHEET	OF

DD FORM 672-1 COORDINATE

593. 4645

USER ACTIVITIES: ARMY-AT

NUMBER ACTIVITIES: 0A-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

DISPOSITION STATEMENT: A. Approved for public release; distribution is unlimited.

DDOC: N/A

APPROVED 2 SEPTEMBER 1962 REVISION A 25 MAY 1964 B 20 MAY 1966 C 26 SEPTEMBER 1967 D 19 FEB 1976 E 2 FEBRUARY 1988