

INCH-POUND

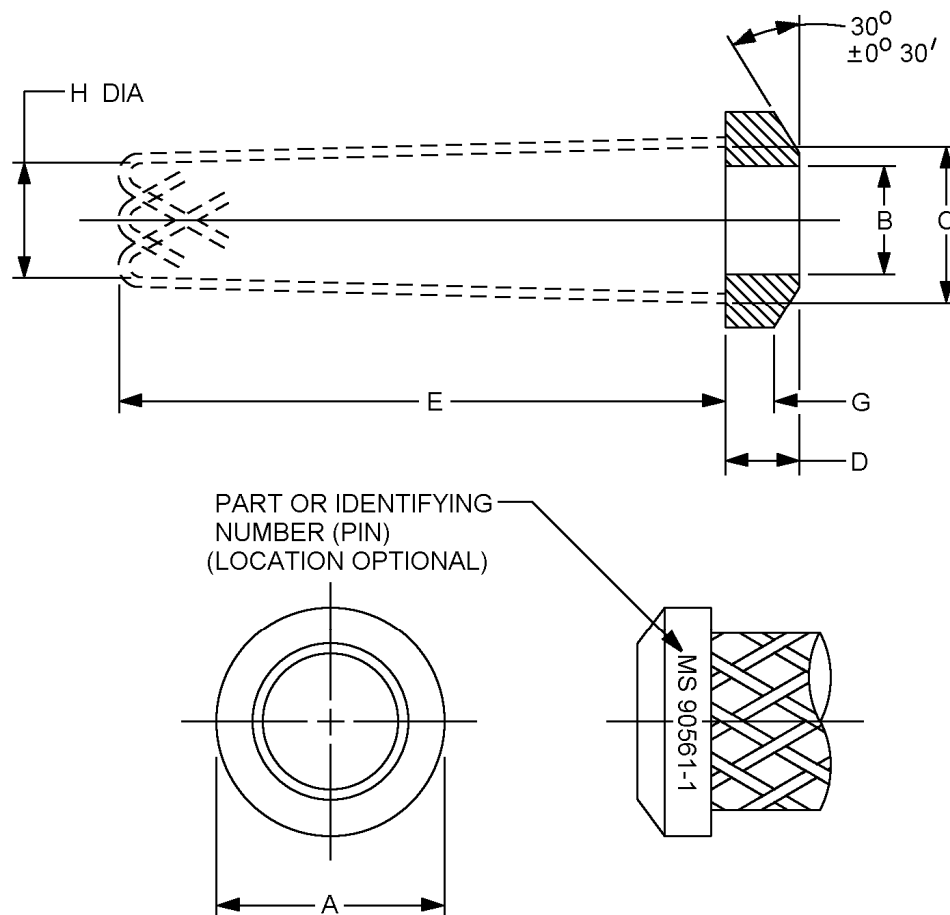
MS90561F
 26 October 2005
 SUPERSEDING
 MS90561E
 07 February 1980

DETAIL SPECIFICATION SHEET

GRIP, CABLE, WOVEN, STRAIN RELIEF, AXIAL

This specification is approved for use by all Departments
 and Agencies of the Department of Defense

The requirements for acquiring the product described herein
 shall consist of this specification sheet and MIL-DTL-22992.

FIGURE 1. Dimensions and configuration.

MS90561F

MS PIN	Arrangement number	A dia + .000 - .010	B dia + .020 - .000	C dia max	D ± .015
90561-1	28-03, -05, -06 32-02, 32-04	1.797	.969	1.506	.450
-2	28-13, 32-03 32-05, 32-12	1.797	1.145	1.506	.413
-3	32-07	1.797	1.260	1.506	.368
-4	28-02, 29-04	1.797	.844	1.506	.485
-5	44-02, 44-04	2.235	1.312	1.944	.477
-6	44-06	2.235	1.375	1.944	.459
-7	48-13	2.672	2.062	2.418	.500
-8	52-02	2.922	1.703	2.672	.680
-9	52-06	2.922	1.797	2.672	.653
-10	Canceled	NO SUPERSEDING DATA			
-11	Canceled	NO SUPERSEDING DATA			
-12	28-07, 28-12 32-06	1.797	1.047	1.506	.428
-13	32-13	1.797	1.342	1.506	.366
-14	44-03, 44-05	2.235	1.438	1.944	.441
-15	44-12	2.235	1.516	1.944	.419
-16	44-13	2.235	1.688	1.944	.375
-17	52-12	2.922	2.328	2.672	.497
-18	52-13	2.922	2.500	2.672	.453
-19	44-51	2.235	1.750	1.955	.325
-20	44-52	2.235	1.579	1.944	.406
-21	44-56	2.235	1.160	1.944	.340

FIGURE 1. Dimensions and configuration - Continued.

MS90561F

MS PIN	Arrangement number	E approx.	G $\pm .005$	H dia cable range	
				max	Min
90561-1	28-03, -05, -06 32-02, 32-04	8.000	.250	.969	.832
-2	28-13, 32-03 32-05, 32-12	8.000	.250	1.145	1.003
-3	32-07	9.000	.250	1.260	1.055
-4	28-02, 29-04	7.500	.250	.844	.688
-5	44-02, 44-04	11.500	.250	1.312	1.156
-6	44-06	10.500	.250	1.375	1.219
-7	48-13	15.000	.369	2.062	1.867
-8	52-02	14.500	.369	1.703	1.414
-9	52-06	14.500	.369	1.797	1.508
-10	Canceled	NO SUPERSEDING DATA			
-11	Canceled	NO SUPERSEDING DATA			
-12	28-07, 28-12 32-06	8.000	.250	1.047	.891
-13	32-13	9.500	.250	1.342	1.185
-14	44-03, 44-05	10.500	.250	1.438	1.282
-15	44-12	11.500	.250	1.516	1.360
-16	44-13	13.500	.250	1.688	1.531
-17	52-12	18.000	.369	2.328	2.039
-18	52-13	19.000	.369	2.500	2.211
-19	44-51	12.500	.250	1.750	1.550
-20	44-52	12.000	.250	1.160	1.375
-21	44-56	8.000	.250	1.160	1.010

FIGURE 1. Dimensions and configuration - Continued.

MS90561F

Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.250	6.350	0.680	17.272	1.360	34.544	2.211	56.159
0.325	8.255	0.688	17.475	1.375	34.925	2.235	56.769
0.340	8.636	0.832	21.133	1.414	35.916	2.328	59.131
0.366	9.296	0.844	21.438	1.438	36.525	2.418	61.417
0.368	9.347	0.891	22.631	1.506	38.252	2.500	63.500
0.369	9.373	0.969	24.613	1.508	38.303	2.672	67.869
0.375	9.525	1.003	25.476	1.516	38.506	2.922	74.219
0.406	10.312	1.010	25.654	1.531	38.887	7.500	190.500
0.413	10.490	1.047	26.594	1.550	39.370	8.000	203.200
0.419	10.643	1.055	26.797	1.579	40.106	9.000	228.600
0.428	10.871	1.145	29.083	1.688	42.875	9.500	241.300
0.441	11.201	1.156	29.362	1.703	43.256	10.500	266.700
0.450	11.430	1.160	29.464	1.750	44.450	11.500	292.100
0.453	11.506	1.185	30.099	1.797	45.644	12.000	304.800
0.459	11.659	1.219	30.963	1.867	47.422	12.500	317.500
0.477	12.116	1.260	32.004	1.944	49.378	13.500	342.900
0.485	12.319	1.282	32.563	1.955	49.657	14.500	368.300
0.497	12.624	1.312	33.325	2.039	51.791	15.000	381.000
0.500	12.700	1.342	34.087	2.062	52.375	18.000	457.200
0.653	16.586					19.000	482.600

NOTES:

1. Dimensions are in inches, unless otherwise specified, tolerance is $\pm .010$ (.25 mm).
2. Metric equivalents are given for information only.
3. Material shall be corrosion resisting steel, type 18-8 or equivalent.

FIGURE 1. Dimensions and configuration - Continued.

MS90561F

REQUIREMENTS:

Design and construction: See figure 1.

PIN example: MS90561-X (See figure 1).

The permeability requirement of MIL-DTL-22992 is not required.

Qualification:

Visual and mechanical examination.

Humidity.

Durability.

Salt spray (corrosion).

Tensile.

Water immersion.

Group A sampling inspection. 100% inspection is not applicable, sampling inspection shall be in accordance with table I.

TABLE I. Group A sampling plan.

Lot size	Sampling size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. This document references only MIL-DTL-22992.

MS90561F

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:

DLA – CC

Review activities:

Army – AT, AV, CR4, MI
Navy – AS, CG, MC, OS
Air Force – 13, 19, 99

(Project 5935–4719–013)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.