

INCH-POUND


MS90564G
 7 March 2007
 SUPERSEDING
 MS90564F
 26 October 2005

DETAIL SPECIFICATION SHEET

COVER, ELECTRICAL, CONNECTOR, PLUG, CLASS L

This specification is approved for use by all Departments
 and Agencies of the Department of Defense

The requirements for acquiring the product described herein
 shall consist of this specification sheet and MIL-DTL-22992.

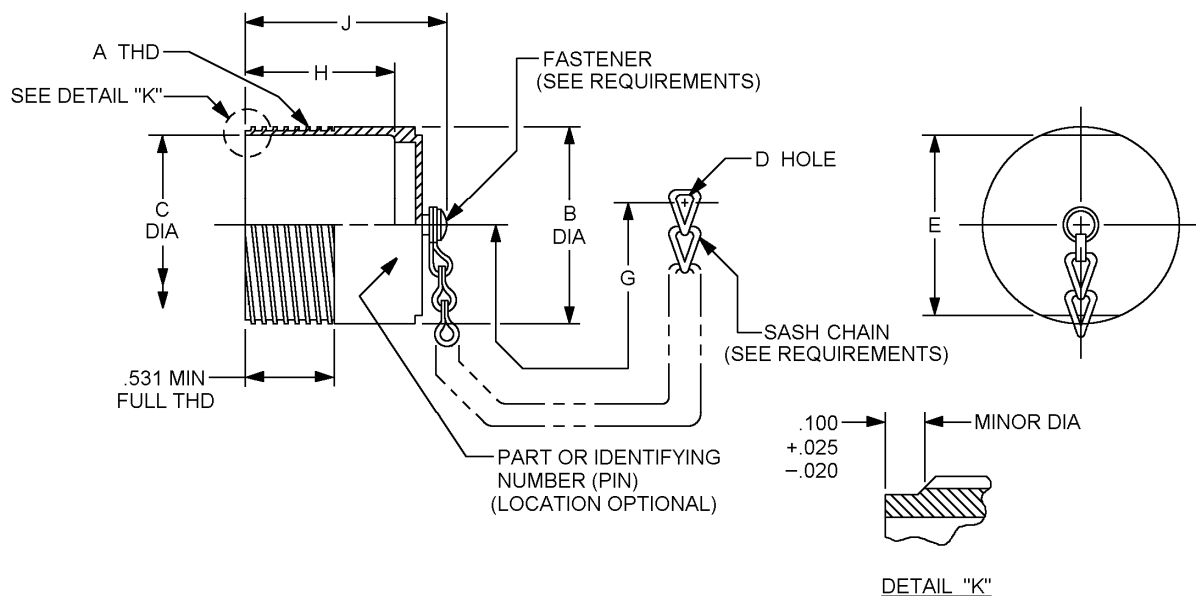

Inches	mm
.020	1.524
.025	9.652
.100	2.54
.531	13.487

FIGURE 1. Dimensions and configuration.

MS90564G

MS PIN	Shell size	A Thread DS-2A	B dia max	C dia min
MS90564-1 ()	28	2.000-.1428P-.2857L	2.000 (50.80)	1.692 (42.98)
MS90564-3 ()	32	2.250-.1428P-.2857L	2.250 (57.15)	1.942 (49.33)
MS90564-4 ()				
MS90564-7 ()	44	3.000-.1428P-.2857L	3.000 (76.20)	2.692 (68.38)
MS90564-9 ()	48	3.250-.1428P-.2857L	3.250 (82.55)	29.11 (73.94)
MS90564-11 ()	52	3.500-.1428P-.2857L	3.500 (88.90)	3.161 (80.29)

MS PIN	Shell size	D Dia. Hole See note 4		E Across flats	G	H min	J max
		For receptacle with coupling ring MS90558	For plug with coupling ring MS90556				
MS90564-1 ()	28	.164 (4.166)	.164 (4.166)	1.750 (44.45)	7.500 (190.50)	1.562 (39.67)	2.266 (57.56)
MS90564-3 ()	32	.190 (4.826)		2.000 (50.80)	6.000 (152.40)	1.562 (39.67)	2.266 (57.56)
MS90564-4 ()			.164 (4.166)		7.500 (190.50)		
MS90564-7 ()	44	.250 (6.350)	.250 (6.350)	2.750 (69.85)	8.500 (215.90)	1.781 (45.24)	2.484 (63.09)
MS90564-9 ()	48	.250 (6.350)	.250 (6.350)	3.000 (76.20)	8.500 (215.90)	1.781 (45.24)	2.484 (63.09)
MS90564-11 ()	52	.250 (6.350)	.250 (6.350)	3.250 (83.55)	8.500 (215.90)	1.781 (45.24)	2.484 (63.09)

FIGURE 1. Dimensions and configuration - Continued.

MS90564G

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are $+0.010$ (.25 mm) for three place decimals and ± 0.02 (.51mm) for two place decimals.
4. D clearance to accommodate screw size indicated. Clearance hole may be rounded and enlarged by the use of a drift pin.

FIGURE 1. Dimensions and configuration - Continued.

REQUIREMENTS:

Design and construction: See figure 1.

Chain shall move freely on protective cap after assembly.


Chain shall be passivated stainless steel in accordance with type II, class 3, trade number 8 as specified in RR-C-271 for -1, -3 and -4, and type II, class 3, trade number 35 as specified in RR-C-271 for -7, -9 and -11.

Chain shall be within one link of length specified.

Cover finish shall be designated by the letter C (conductive) or N (nonconductive).

Optional design chain: Chain may be reversed and a larger link provided as a reverse link to provide the necessary D clearance hole.

PIN example:

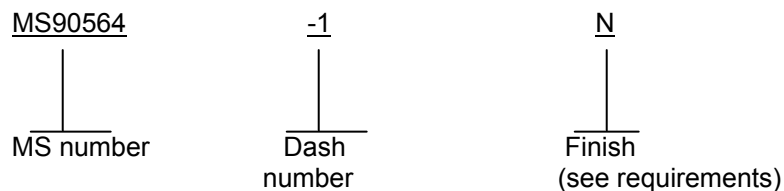

Supersession data:

MS PIN MS90564-3 is superseded by MS PIN MS90564-3C.

MS PIN MS90564-4 is superseded by MS PIN MS90564-4C.

Qualification:

Visual and mechanical examination.

Water immersion.

Salt spray (corrosion).

Tensile.

Air leakage.

MS90564G

Group A sampling inspection. 100% inspection is not applicable, sampling inspection shall be specified in table I:

TABLE I. Group A sampling plan.

Lot size	Sampling size
1 to 13	100 percent
14 to 150	13 units
151 to 280	20 units
281 to 500	29 units
501 to 1,200	34 units
1,201 to 3,200	42 units

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-22992, this document references the following:

MS90556
MS90558
RR-C-271

CONCLUDING MATERIAL

Custodians:

Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:

DLA – CC

Review activities:

Army – AT, AV, MI
Navy – AS, CG, MC, OS
Air Force – 19, 99

(Project 5935–2006-225)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change. You should verify the currency of the information above using the ASSIST Online database at <http://assist.daps.dla.mil>.