

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

REVIEWER ACTIVITIES
ARMY-CE, ME
NAVY-SA
AIR FORCE-82

USER ACTIVITIES
ARMY-AM, MI
NAVY-AS, MC, SH

GSA-FSS

17000

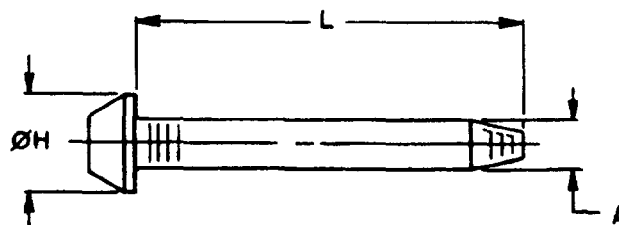
FED SUP CLASS
5315

TABLE I. DASH NUMBERS AND DIMENSIONS

SQUARE SPIKES				
DASH NUMBER	A (SQUARE)	Ø H	L	NO./100 LBS (APPROX)
1	.375	.6875	5	460
2	.375	.6875	6	374
3	.375	.6875	7	317
4	.375	.6875	8	277
5	.500	1.000	9	147
6	.500	1.000	10	131
7	.500	1.000	12	106

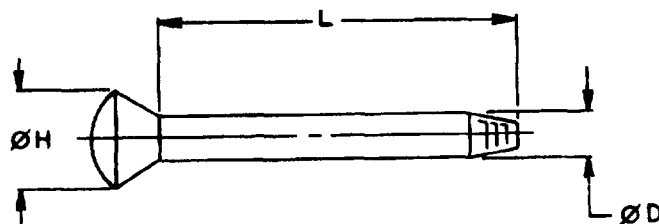


TABLE II. DASH NUMBERS AND DIMENSIONS

ROUND WIRE SPIKES					
DASH NUMBER	COMM DES	L	Ø D	Ø H	APPROX NO./LB
8	40d	5	.2625	.531	13
9	60d	6	.283	.562	9
10		7	.312	.625	7
11		8	.375	.750	4

A ENTIRE STANDARD REVISED

PA ARMY-AR Other Cont NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SPIKES; BARGE AND BOAT	MILITARY STANDARD MS90717
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES	PAGE 1	OF 2

DD FORM 1 MAY 63 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5315-0430

APPROVED 18 DEC 62 REVISED A 25 JAN 86

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this
document when applicable

REVIEWER ACTIVITIES
ARMY-CE, ME
NAVY-SA
AIR FORCE-82

USER ACTIVITIES
ARMY-AV, MI
NAVY-AS, MC, SM


ORGANIZED COMMUNITATIVE ACTIVITIES
GSA - FSS

FED SUP CLASS
5315

REQUIREMENTS

1. **MATERIAL:** SQUARE SPIKES, TYPE V, STYLE 4, SHALL BE MANUFACTURED FROM WROUGHT IRON, COPPER SILICON ALLOY OR AUSTENITIC CORROSION-RESISTANT STEEL IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION. ROUND WIRE SPIKES, TYPE V, STYLE 3, SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
CODE A - WROUGHT STEEL
CODE B - COPPER SILICON ALLOY
CODE C - AUSTENITIC CORROSION-RESISTANT STEEL
2. **CHARACTERISTICS:** SQUARE SPIKES SHALL HAVE A CHISEL POINT, DIAMOND HEAD AND SMOOTH SQUARE SHANK. ROUND WIRE SPIKES SHALL HAVE A CHISEL POINT, OVAL COUNTERSUNK HEAD AND SMOOTH ROUND SHANK.
3. **PROTECTIVE COATING AND SURFACE TREATMENT:** SQUARE AND ROUND SPIKES MADE OF WROUGHT IRON OR STEEL WIRE SHALL BE ZINC COATED IN ACCORDANCE WITH ASTM B633, TYPE 11, CLASS FE/ZN13, LUSTRE BRIGHT, AND AS CODED IN REQUIREMENT 5.
4. **MAGNETIC PERMEABILITY:** CORROSION-RESISTANT STEEL SHALL HAVE A MAGNETIC PERMEABILITY OF 2.0 MAXIMUM IN FIELDS OF 100 TO 200 OERSTEDS.
5. **PART NUMBER:** THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, A DASH NUMBER FROM TABLE I OR II, MATERIAL CODE LETTER, AND THE FINISH CODE LETTER "Z" FOR ZINC COAT WHEN SPECIFIED.

EXAMPLE: MS90717-2A-Z



MS90717-2A-Z INDICATES- SQUARE, SPIKE 375 (SQUARE) 6 INCHES LONG, WROUGHT STEEL, ZINC COATED.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

P.A. ARMY-AR Other Cost NAVY-YD AIR FORCE-99		INTERNATIONAL INTEREST	TITLE SPIKES; BARGE AND BOAT	MILITARY STANDARD MS90717
PROCUREMENT SPECIFICATION FF-N-105		SUPERSEDES		PAGE 2 OF 2