

USER ACTIVITIES:
ME MU PA CL WV OB MC NSA

REVIEWER ACTIVITIES:
AT AV MI EA

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

			FED SUP CLASS 5305						
TABLE 1									
NOMINAL SIZE			1/4	5/16	3/8	7/16	1/2	9/16	5/8
B	THREAD	UNF-2A	28	24	24	20	20	18	18
D	BODY DIAMETER	MAX MIN	.2500 .2450	.3125 .3065	.3750 .3690	.4375 .4305	.5000 .4930	.5625 .5545	.6250 .6170
F	WIDTH ACROSS FLATS	MAX MIN	.4375 .4280	.5000 .4890	.5625 .5510	.6250 .6120	.7500 .7360	.8125 .7980	.9375 .9220
G	WIDTH ACROSS CORNERS	MAX MIN	.505 .488	.577 .557	.650 .628	.722 .698	.866 .840	.938 .910	1.083 1.051
H	HEAD HEIGHT	MAX MIN	.163 .150	.211 .195	.243 .226	.291 .272	.323 .302	.371 .348	.403 .378
R	RADIUS	MAX MIN	.025 .015	.025 .015	.025 .015	.025 .015	.025 .015	.045 .020	.045 .020
* MIN TENSILE STRENGTH - LBS			5,450	8,700	13,200	17,800	24,000	30,400	38,400
L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH** NO.	DASH NO.	DASH** NO.	DASH NO.	
.375 .438 .500 .562 .625 .750 .875 1.000	+0 -.031	1 2 3 4 5 6 7 8	27 28 29 30 31 32 33 34	53 54 55 56 57 58 59 60	79 80 81 82 83 84 85	104 105 106 107 108 109	130 131 132 133 134	155 156 157 158	
1.125 1.250 1.375 1.500 1.750 2.000	+0 -.062	9 10 11 12 13 14	35 36 37 38 39 40	61 62 63 64 65 66	86 87 88 89 90 91	110 111 112 113 114 115	135 136 137 138 139 140	159 160 161 162 163 164	
2.250 2.500 2.750 3.000 3.250 3.500 3.750 4.000 4.250 4.500 4.750 5.000 5.500 6.000	+0 -.094	15 16 17 18 19 20 21 22 23 24 25 26	41 42 43 44 45 46 47 48 49 50 51 52	67 68 69 70 71 72 73 74 75 76 77 78	92 93 94 95 96 97 98 99 100 101 102 103	116 117 118 119 120 121 122 122 124 125 126 127 128 129	141 142 143 144 145 146 147 148 149 150 151 152 153 154	165 166 167 168 169 170 171 172 173 174 175 176 177 178	
NOTE: FOR NOTES AND ADDITIONAL SIZES SEE SHEET 2.									
CROSS REFERENCE OF PART NUMBERS									
THE SCREWS COVERED BY DASH NUMBERS GIVEN IN MS35302, MS35304 AND MS35306 ARE CANCELLED AFTER THE DATES INDICATED ON THE CANCELLED DOCUMENTS. USE DASH NUMBERS USED IN THIS STANDARD. THE CANCELLED SCREWS CANNOT ALWAYS REPLACE THE NEW SCREWS AND SHOULD BE USED UNTIL EXISTING STOCKS ARE DEPLETED. USE ONLY THE NEW SCREWS FOR DESIGN AND REPLACEMENT. DASH NUMBERS REPRESENTING OLD AND NEW SCREWS ARE IDENTICAL, MAKING IT UNNECESSARY TO PREPARE AN INTERCHANGEABILITY TABLE.									
(F) DENOTES CHANGES									
P.A. AR Other Cust 99	INTERNATIONAL INTEREST	TITLE SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), ALLOY STEEL, GRADE 8, ZINC COATED, UNF-2A, PLAIN AND SELF-LOCKING (F)					MILITARY STANDARD MS90727		
PROCUREMENT SPECIFICATION FF-S-85		SUPERSEDES SEE NOTE 12					SHEET 1 OF 5		

APPROVED 6 MAY 63 REVISED (A) 1 AUG 67 (B) 14 OCT 68 (C) 1 MAY 1969 (D) 22 OCT 1970 (E) 21 JUNE 1978 (F) 4 NOV 88

014911

FED SUP CLASS
5305

TABLE II

NOMINAL SIZE	3/4	7/8	1	1-1/8	1-1/4	1-3/8	1-1/2
B THREAD UNF-2A	16	14	12	12	12	12	12
D BODY DIAMETER							
MAX	.7500	.8750	1.0000	1.1250	1.2500	1.3750	1.5000
MIN	.7410	.8660	.9900	1.1140	1.2390	1.3630	1.4880
F WIDTH ACROSS FLATS							
MAX	1.1250	1.3125	1.5000	1.6875	1.8750	2.0625	2.2500
MIN	1.1000	1.2850	1.4690	1.6310	1.8120	1.9940	2.1750
G WIDTH ACROSS CORNERS							
MAX	1.299	1.516	1.732	1.949	2.165	2.382	2.598
MIN	1.254	1.465	1.675	1.859	2.066	2.273	2.480
H HEAD HEIGHT							
MAX	.483	.563	.627	.718	.813	.878	.974
MIN	.455	.531	.591	.658	.749	.810	.902
R RADIUS							
MAX	.045	.065	.095	.095	.095	.095	.095
MIN	.020	.040	.060	.060	.060	.060	.060
* MIN TENSILE STRENGTH - LBS	56,000	76,400	99,400	128,400	161,000	197,200	237,200

L LENGTH	TOLERANCE		DASH NO.	DASH** NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
	SIZE .750	SIZE .875 AND OVER							
.750	+0	+0	179	202	224				
.875			180						
1.000			181						
1.125	+0	+0	182	204	225	245	265	284	302
1.250			183	205	226	246			
1.375			184	206	227	247			
1.500			185	207	228	248			
1.750			186	208	229	249			
2.000			187	209	230	250			
2.250	+0	+0	188	210	231	251	270	288	305
2.500			189	211	232	252	271	289	306
2.750			190	212	233	253	272	290	307
3.000			191	213	234	254	273	291	308
3.250			192	214	235	255	274	292	309
3.500			193	215	236	256	275	293	310
3.750			194	216	237	257	276	294	311
4.000			195	217	238	258	277	295	312
4.250			196	218	239	259	278	296	313
4.500			197	219	240	260	279	297	314
4.750			198	220	241	261	280	298	315
5.000			199	221	242	262	281	299	316
5.500			200	222	243	263	282	300	317
6.000			201	223	244	264	283	301	318

NOTES:

1. MATERIAL: ALLOY STEEL, GRADE 8, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. PROTECTIVE COATING: ZINC COATING IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
3. THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
4. THREAD LENGTH: MINIMUM THREAD LENGTH SHALL BE TWICE THE DIAMETER PLUS 1/4 INCH. THE TOLERANCE SHALL BE PLUS 3/16 INCH OR 2-1/2 THREADS, WHICHEVER IS GREATER. ON SCREWS THAT ARE TOO SHORT FOR MINIMUM THREAD LENGTHS, THE DISTANCE FROM THE BEARING SURFACE OF THE HEAD TO THE FIRST COMPLETE THREAD SHALL NOT EXCEED THE LENGTH OF 2-1/2 THREADS FOR SIZES UP TO AND INCLUDING 1 INCH AND 3-1/2 THREADS FOR SIZES LARGER THAN 1 INCH.
5. DIMENSIONS: ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.
6. HEAD MARKING: HEADS SHALL BE MARKED IN ACCORDANCE WITH MIL-HDBK-131. RAISED MARKINGS ARE PREFERRED, STAMPINGS ARE ACCEPTABLE.

P.A. AR Other Cust 99	INTERNATIONAL INTEREST	TITLE SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), ALLOY STEEL, GRADE 8, ZINC COATED, UNF-2A, PLAIN AND SELF-LOCKING (F)	MILITARY STANDARD MS90727
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES SEE NOTE I2	SHEET 2	OF 5

USER ACTIVITIES:
ME MU PA CL WV OB MC NSAREVIEWER ACTIVITIES:
AT AV MI EA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 6 MAY 63 REVISED (A) 1 AUG 67 (B) 14 OCT 68 (C) MAY 1969 (D) 22 OCT 1970 (E) FOR CHANGES SEE SHEETS 1,2,3,4, AND 5

FED SUP CLASS
5305USER ACTIVITIES:
ME MU PA CL WV OB MC NSAREVIEWER ACTIVITIES:
AT AV MI EA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

7. SELF-LOCKING ELEMENT:

- (a) THE SELF-LOCKING ELEMENT SHALL BE A PATCH TYPE OR LONGITUDINAL STRIP IN ACCORDANCE WITH MIL-F-18240.
- (b) FOR "X" AND "Y" DIMENSIONS AND DESIGN AND USAGE LIMITATIONS, SEE MS15981.
- (c) MAXIMUM RING GAGE DIAMETER THAT LOCKING REGION OF SCREW MUST PASS THRU FREELY OR WITH FINGER PRESSURE SHALL BE THE NOMINAL SIZE PLUS 0.010.

8. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. FOR SCREWS WITH SELF-LOCKING ELEMENT ADD THE LETTER "L" AFTER THE DASH NUMBER.

EXAMPLE: MS90727-1 PLAIN SCREW.
MS90727-1L SELF-LOCKING SCREW.

- *9. BASED ON MINIMUM ULTIMATE TENSILE STRENGTH OF 150,000 p.s.i. TENSILE STRENGTHS ARE CALCULATED BY THE STRESS AREAS INDICATED IN SCREW-THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
11. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
12. SUPERSEDES: MS35302 IN PART, MS35304 AND MS35306, BCAX8, BCXK7 IN PART, BQLX4, BUBX17, 17.1, 18, 18.1, 19 AND 19.1.

- *13. INACTIVE FOR NEW DESIGN AFTER 21 JUNE 1976.

- (F) 14. THIS MILITARY STANDARD IS NOT INTENDED FOR USE IN AIRBORNE APPLICATIONS.

APPROVED 6 MAY 63 REVISED (A) 1 AUG 67 (B) 14 OCT 68 (C) 1 MAY 1969 (D) 22 OCT 1970 (E) FOR CHANGES SEE SHEETS 1, 2, 3, 4, AND 5

P.A. AR Other Cust 99	INTERNATIONAL INTEREST	TITLE SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), ALLOY STEEL, GRADE 8, ZINC COATED, UNF-2A, PLAIN AND SELF-LOCKING (F)	MILITARY STANDARD MS90727
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES SEE NOTE 12	SHEET 3	OF 5

USER ACTIVITIES:
ME MU PA CL WV OB MC NSA

REVIEWER ACTIVITIES:
AT AV MI EA

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

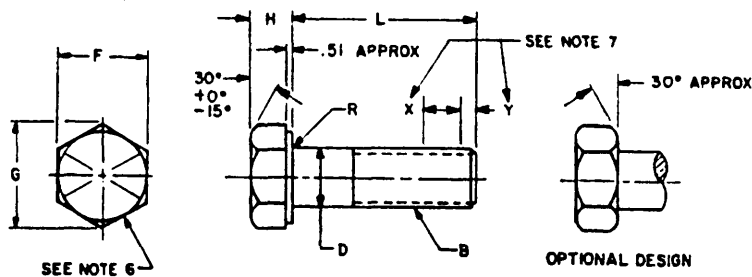


TABLE III
METRIC TRANSLATION OF TABLE I

NOMINAL SIZE	MM	6.350	7.938	9.525	11.112	12.700	14.288	15.875
B THREAD PITCH		0.907	1.058	1.058	1.270	1.270	1.411	1.411
D BODY DIAMETER	MAX MIN	6.350 6.223	7.938 7.785	9.525 9.373	11.112 10.935	12.700 12.522	14.288 14.084	15.875 15.672
F WIDTH ACROSS FLATS	MAX MIN	11.112 10.871	12.700 12.421	14.288 13.995	15.875 15.545	19.050 18.694	20.638 20.269	23.812 23.419
G WIDTH ACROSS CORNERS	MAX MIN	12.827 12.395	14.656 14.148	16.510 15.951	18.339 17.729	21.996 21.336	23.825 23.114	27.508 26.695
H HEAD HEIGHT	MAX MIN	4.140 3.810	5.359 4.953	6.172 5.740	7.391 6.909	8.204 7.671	9.423 8.839	10.236 9.601
R RADIUS	MAX MIN	.635 .381	.635 .381	.635 .381	.635 .381	.635 .381	1.143 .508	1.143 .508
* MIN TENSILE STRENGTH-KN		24.525	39.150	59.400	80.100	108.000	136.800	172.800
L LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.**	DASH NO.	DASH NO.**	DASH NO.
9.525	+0 -.787	1	27	53	79	104	130	
11.125		2	28	54				
12.700		3	29	55				
14.275		4	30	56				
15.875		5	31	57	82	106	131	155
19.050		6	32	58	83	107	132	156
22.225		7	33	59	84	108	133	157
25.400		8	34	60	85	109	134	158
28.575	+0 -1.575	9	35	61	86	110	135	159
31.750		10	36	62	87	111	136	160
34.925		11	37	63	88	112	137	161
38.100		12	38	64	89	113	138	162
44.450		13	39	65	90	114	139	163
50.800		14	40	66	91	115	140	164
57.150		15	41	67	92	116	141	165
63.500		16	42	68	93	117	142	166
69.850	+0 -2.388	17	43	69	94	118	143	167
76.200		18	44	70	95	119	144	168
82.550		19	45	71	96	120	145	169
88.900		20	46	72	97	121	146	170
95.250		21	47	73	98	122	147	171
101.600		22	48	74	99	123	148	172
107.950		23	49	75	100	124	149	173
114.300		24	50	76	101	125	150	174
120.650		25	51	77	102	126	151	175
127.000		26	52	78	103	127	152	176
139.700						128	153	177
152.400						129	154	178

NOTE:

- ALL DIMENSIONS ARE IN MILLIMETERS (mm), UNLESS OTHERWISE SPECIFIED AND ARE BASED ON AN APPROXIMATE CONVERSION FACTOR OF 25.4 mm EQUAL ONE INCH.
- FOR ADDITIONAL SIZES SEE SHEET 4.
- INACTIVE FOR NEW DESIGN AFTER 21 JUNE 1976.

P.A. AR Other Cust 99	INTERNATIONAL INTEREST	TITLE SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), ALLOY STEEL, GRADE 8, ZINC COATED, UNF-2A, PLAIN AND SELF-LOCKING (F)	MILITARY STANDARD MS90727
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES SEE NOTE 12	SHEET 4	OF 5

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5305-1747

969 (D) 22 OCT 1970 (F) FOR CHANGES SEE SHEETS 1,2,3,4, AND 5

REVISED (A) 1 AUG 1967 (B) 14 OCT 1968 (C) 11

APPROVED 6 MAY 63

FED. SUP CLASS
5305TABLE IV
METRIC TRANSLATION OF TABLE II

NOMINAL SIZE		MM	19.050	22.225	25.400	28.575	31.750	34.925	38.100
B	THREAD PITCH		1.588	1.814	2.117	2.117	2.117	2.117	2.117
D	BOCY DIAMETER	MAX MIN	19.050 18.821	22.225 21.996	25.400 25.146	28.575 28.296	31.750 31.471	34.925 34.620	38.100 37.795
F	WIDTH ACROSS FLATS	MAX MIN	28.575 27.940	33.338 32.639	38.100 37.313	42.862 41.427	47.625 46.025	52.388 50.648	57.150 55.245
G	WIDTH ACROSS CORNERS	MAX MIN	32.995 31.852	38.506 37.211	43.993 42.545	49.505 47.219	54.991 52.476	60.503 57.734	65.989 62.992
H	HEAD HEIGHT	MAX MIN	12.268 11.557	14.300 13.487	15.926 15.011	18.237 16.713	20.650 19.025	22.301 20.574	24.740 22.911
R	RADIUS	MAX MIN	1.143 .508	1.651 1.016	2.413 1.524	2.413 1.524	2.413 1.524	2.413 1.524	2.413 1.524
**MIN TENSILE STRENGTH-KN			252.000	343.800	447.300	577.800	724.500	887.400	1067.400
L LENGTH	TOLERANCE		DASH NO.	DASH** NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
	SIZE 19.050	SIZE 22.225 AND OVER							
19.050 22.225 25.400	+0 -.787	+0 -1.575	179 180 181	202 203	224				
28.575 31.750 34.925 38.100 44.450 50.800	+0 -1.575	+0 -3.175	182 183 184 185 186 187	204 205 206 207 208 209	225 226 227 228 229 230	245 246 247 248 249 250	265 266 267 268 269	284 285 286 287	302 303 304
57.150 63.500 69.850 76.200 82.550			188 189 190 191 192	210 211 212 213 214	231 232 233 234 235	251 252 253 254 255	270 271 272 273 274	288 289 290 291 292	305 306 307 308 309
88.900 95.250 101.600 107.950 114.300	+0 -2.388	+0 -4.775	193 194 195 196 197	215 216 217 218 219	236 237 238 239 240	256 257 258 259 260	275 276 277 278 279	293 294 295 296 297	310 311 312 313 314
120.650 127.000 139.700 152.400			198 199 200 201	220 221 222 223	241 242 243 244	261 262 263 264	280 281 282 283	298 299 300 301	315 316 317 318

NOTE:

- ALL DIMENSIONS ARE IN MILLIMETERS (mm), UNLESS OTHERWISE SPECIFIED AND ARE BASED ON AN APPROXIMATE CONVERSION FACTOR OF 25.4 mm EQUAL ONE INCH.
- THREAD LENGTH: MINIMUM THREAD LENGTH SHALL BE TWICE THE DIAMETER PLUS 6.350 mm. THE TOLERANCE SHALL BE PLUS 4.775 mm OR 2-1/2 THREADS, WHICHEVER IS GREATER. ON SCREWS THAT ARE TOO SHORT FOR MINIMUM THREAD LENGTHS, THE DISTANCE FROM THE BEARING SURFACE OF THE HEAD TO THE FIRST COMPLETE THREAD SHALL NOT EXCEED THE LENGTH OF 2-1/2 THREADS FOR SIZES UP TO AND INCLUDING 25.400 mm AND 3-1/2 THREADS FOR SIZES LARGER THAN 25.400 mm.

**3. INACTIVE FOR NEW DESIGN AFTER 21 JUNE 1976.

P.A. AR Other Cust 99	INTERNATIONAL INTEREST	TITLE SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), ALLOY STEEL, GRADE 8, ZINC COATED, UNF-2A, PLAIN AND SELF-LOCKING (F)	MILITARY STANDARD MS90727
PROCUREMENT SPECIFICATION FF-S-85	SUPERSEDES: SEE NOTE 12	SHEET 5	OF 5

USER ACTIVITIES:
ME MU PA CL WV OB MC NSAREVIEWER ACTIVITIES:
AT AV MI EA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 6 MAY 63
REVISED (A) 1 AUG 1967 (B) 14 OCT 1968 (C) 1 MAY 1969 (D) 22 OCT 1970 (E) FOR CHANGES SEE SHEETS 1,2,3,4, AND 5

