


This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product, or design covered herein in engineering, design, and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED. SUP CLASS.
5340

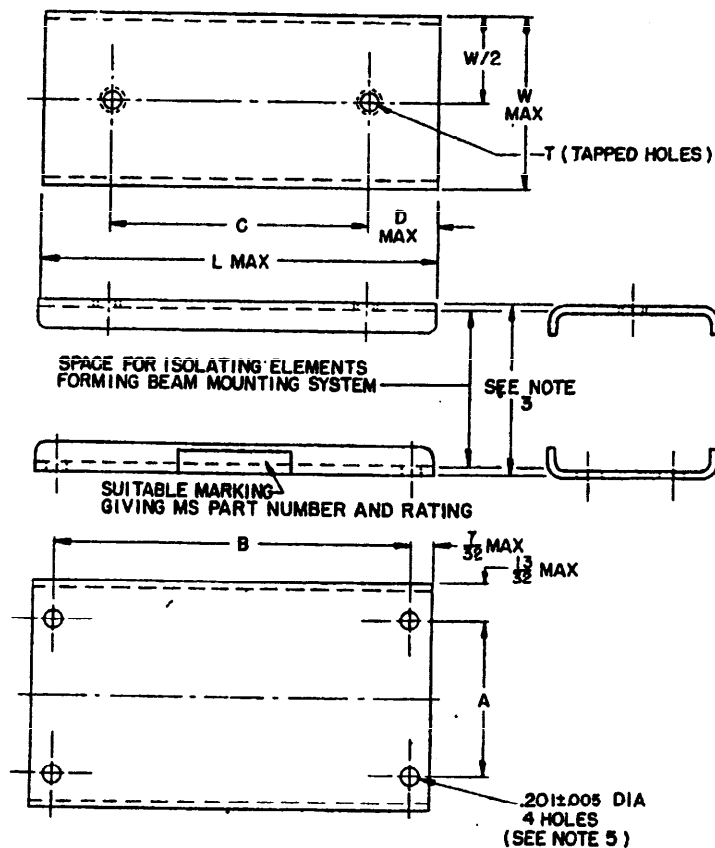

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are $\pm 1/64$ or fractions.
3. The nominal design value at minimum rated load is $1-3/8$ for dimpled mounting and $1-9/16$ for flat mounting. The manufacturer's rated loaded height: a: minimum rated load is the nominal design value $\pm 1/32$, $-1/16$. (See note 4.)
4. The loaded height of the vibration mount at minimum rated load is the manufacturer's rated loaded height $\pm 3/64$.
5. This dimension is the final clearance diameter, with or without eyelet.
6. The MS part number consists of the MS military-standard number followed by a dash number. The dash number indicates the following:
 - First character - Size.
 - Second character - Class.
 - Third character - Serially assigned to load ranges within each size and class.
 - Fourth character - Serially assigned within the same size, class, and load range, when the dimensions differ.
7. Qualification inspection required.
8. Referenced document shall be of the issue in effect on date of invitation for bids.
9. This standard takes precedence over document referenced herein.

(A) ENTIRE STANDARD REVISED

CUSTODIANS: SigC Aer USAF		OTHER INT: N-	MILITARY STANDARD		MS91526
PROCUREMENT SPECIFICATION ML-C-172		SUPERSEDES:	MOUNTS, VIBRATION, BEAM-TYPE, CLASSES A AND B (FOR USE WITH ELECTRONIC EQUIPMENT IN AIRCRAFT)		
					SHEET 1 OF 2

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation, and the fact that the Government may have formulated, furnished, or in any way is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

APPROVED 11 Oct 1955 REVISED (A) 8 Dec 1958

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government of thereby incurs no responsibility. In any case, where any such drawings, specifications, or other data are not to be employed for evaluation or otherwise as an integral part of any Government procurement operation, the Government assumes no obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data is not to be construed as an authorization or endorsement of the views or opinions of any other person or corporation, or of conveying any rights of preemption to manufacture, use, or sell any patented invention that may in any way be related thereto. Where necessary, permission to reproduce copies of drawings, specifications, or other data must be obtained from the holder or any other person or corporation, or from the person or corporation licensing the holder or any other person or corporation.

CLASS A										
MS part number (see note C)	Size	Dimensions							Two-to-one load rating	FIDN ^{1/}
		L	W	A	B	C	D	T		
MS91526-1AA1	1	<u>Inches</u>	<u>Inches</u>	<u>Inches</u>	<u>Inches</u>	<u>Inches</u>	<u>Inches</u>		<u>Pounds</u>	
MS91526-1AB1		6-5/64	2-13/64	1-3/8	5-5/8	4-1/4	29/32	8-32 NC-2B	3 to 6 5 to 10	
MS91526-2AA1	2									
MS91526-2AB1		5-57/64	2-49/64	1-15/16	5-7/16	3-1/2	1-3/16	1/4-28 UNF-2B	4 to 9 6 to 10 9 to 20	
MS91526-2AC1	2									
MS91526-2AC2										
MS91526-2AD1		11-9/64	2-49/64	1-15/16	10-11/16	8-3/4	1-3/16	1/4-28 UNF-2B	9 to 20 12-1/2 to 25 20 to 40	
MS91526-2AE1	2									
MS91526-2AE2		16-25/64	2-49/64	1-15/16	15-15/16	14	1-3/16	1/4-28 UNF-2B	20 to 40	

1/ Federal Item Identification Number.

CLASS B										
MS part number (see note 2)	Size	Dimensions							Load rating 15%	FIN ^{1/}
		L	W	A	B	C	D	T		
MS91526-1BA1	1	6-5/64	2-13/64	1-3/8	5-5/8	4-1/4	29/32	8-32 NC-2B	<u>Pounds</u>	
MS91526-1BB1									.4	
MS91526-1BC1									.6	
MS91526-1BD1									.8	
MS91526-1BE1									1.2	
MS91526-1BF1									1.6	
MS91526-1BG1									2	
MS91526-1BH1									2-3/4	
MS91526-1BJ1									3-1/2	
MS91526-1BK1									4-3/4	
MS91526-1BL1									6-1/2	
MS91526-1BM1									8-1/2	
MS91526-1BN1	2	5-5/64	2-49/64	1-15/16	5-7/16	3-1/2	1-3/16	1/4-28 UNF-2B	11-1/2	
MS91526-1BO1									15-1/2	
MS91526-2BA1									20	
MS91526-2BB1									4-1/2	
MS91526-2BC1									6	
MS91526-2BD1									8	
MS91526-2BE1									11	
MS91526-2BF1									15	
MS91526-2BC2									20	
MS91526-2BD2									8	
MS91526-2BE2									11	
MS91526-2BF2									15	
MS91526-2BG1	2	11-9/64	2-49/64	1-15/16	10-11/16	8-3/4	1-3/16	1/4-28 UNF-2B	20	
MS91526-2BH1									27	
MS91526-2BF3									36	
MS91526-2BG2									20	
MS91526-2BH2									27	
MS91526-2BJ1									36	
MS91526-2BK1									48	
MS91526-2BL1									64	
MS91526-2BG2									86	
MS91526-2BH2									27	
MS91526-2BJ1									36	
MS91526-2BK1									48	
MS91526-2BL1	2	16-25/64	2-49/64	1-15/16	15-15/16	14	1-3/16	1/4-28 UNF-2B	64	
MS91526-2BG2									86	
MS91526-2BH2									27	
MS91526-2BJ1									36	
MS91526-2BK1									48	
MS91526-2BL1									64	
MS91526-2BG2									86	
MS91526-2BH2									27	
MS91526-2BJ1									36	
MS91526-2BK1									48	
MS91526-2BL1									64	
MS91526-2BG2									86	

1/ Federal Item Identification Number.

APPROVED	11 Oct 1955	REVISED	(A) 8 Dec 1958
----------	-------------	---------	----------------

CUSTODIAN: SigC Aer USAF	OTHER INT: N-	MILITARY STANDARD MOUNTS, VIBRATION, BEAM-TYPE, CLASSES A AND B (FOR USE WITH ELECTRONIC EQUIPMENT IN AIRCRAFT)	MS91526
PROCUREMENT SPECIFICATION MIL-C-172	SUPERSEDES:	SHEET 2 OF 2	