
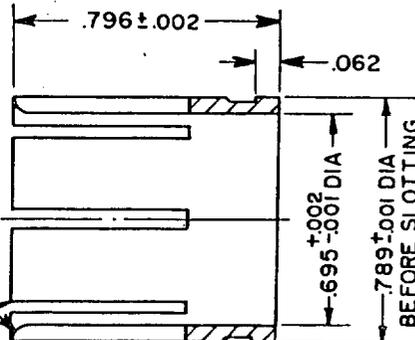


8 SLOTS .040 WIDE x  $\frac{35}{64} \pm \frac{1}{64}$  DEEP  
EQUALLY SPACED



FLARE FINGERS TO  
MEET APPLICABLE  
REQUIREMENTS

.010 R INSIDE  
& OUT

SOLDERING WELL  
.093 WIDE x .013 ± .003  
DEEP PERMISSIBLE

PART NO. MS91599-1

MATERIAL: BERYLLIUM COPPER.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are  $\pm .005$  on decimals.
3. Referenced specification shall be of the issue in effect on date of invitation for bids.

(B) CANCELED

NO SUPERSEDING REPLACEMENT

THIS PART IS FOR DESIGN USE ONLY AND IS NOT TO BE STOCKED OR CATALOGUED.

User activities: Army - O  
Navy - AMCO r S  
Air Force -

Army -  
Navy -  
Air Force -

review activities:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 21 SEPT. 1954 REVISED (A) 3 MAY 1974 (B) 2 MAR 88

P.A. AIR FORCE 85 Other Cust ARMY - EL NAVY - EC	International Interest	TITLE CONTACT, ELECTRICAL, SERIES LC CONNECTORS	MILITARY STANDARD
			MS91599
Procurement Specification MIL-C-3650	SUPERSEDES:	PAGE 1 OF 1	