
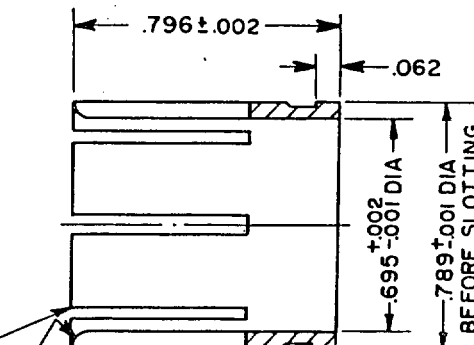


FED. SUP CLASS
5935User activities: Army - O
Navy - AMCO's
Air Force -review activities: Army -
Navy -
Air Force -8 SLOTS .040 WIDE x $\frac{35}{64} \pm \frac{1}{64}$ DEEP
EQUALLY SPACEDFLARE FINGERS TO
MEET APPLICABLE
REQUIREMENTS.010 R INSIDE
& OUTSOLDERING WELL
.093 WIDE x .013 ± .003
DEEP PERMISSIBLE

PART NO. MS91599-1

MATERIAL: BERYLLIUM COPPER.

NOTES:

1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are $\pm .005$ on decimals.
3. Referenced specification shall be of the issue in effect on date of invitation for bids.

(B)

CANCELED

NO SUPERSEDING REPLACEMENT

THIS PART IS FOR DESIGN USE ONLY AND IS NOT TO BE STOCKED OR CATALOGUED.

| | | | | |
|---|---------------------------|--|-------------------|----|
| P.A AIR FORCE 85 Other Cust ARMY - EL NAVY - EC | International Interest | TITLE CONTACT, ELECTRICAL , SERIES LC CONNECTORS | MILITARY STANDARD | |
| | | | MS91599 | |
| Procurement Specification MIL-C - 3650 | | SUPERSEDES: | PAGE | OF |

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

5935 - 3619

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 21 SEPT. 1954
REVISED (A) 3 MAY 1974 (B) 2 MAR 88