


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for reports we use shall be made from this document.

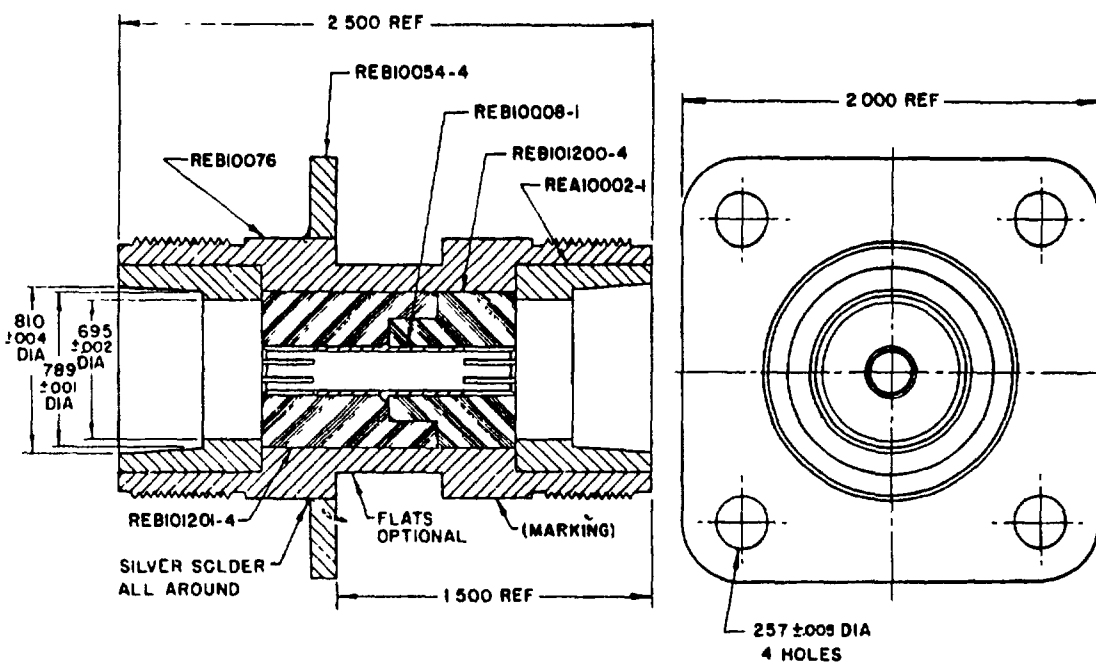

MS PART NO MS91818-287B

BUREAU OF SHIPS DRAWING NO	DESCRIPTION	QUANTITY
REA10002-1	Bushing	2
REB10008-1	Contact	1
REB10064-4	Mounting plate	1
REB10076	Body	1
REB101200-4	Insulator	1
REB101201-4	Insulator	1

1 All dimensions in inches

- 2 Press-fit bushing REA10002-1 into body PER10076.  
3 The dielectric withstanding test voltage shall be 5,000 volts root mean square  
4 Adapter ~~W-287A/U~~ replaces adapters W-287/U and -287A/U  
5 The MS part number consists of the MS military-standard number followed by a dash number. The dash number  
6 "287A" is derived from assigned nomenclature.  
7 Referenced documents shall be of the issue in effect on date of invitations for bid.  
8 For design feature purposes, this standard takes precedence over procurement documents referenced herein.

ENGINEERING DATA WEATHERPROOF, RADIOFREQUENCY, COAXIAL CONNECTOR ADAPTER, NOMINAL IMPEDANCE, 50 OHMS, RATED AT 5,000 VOLTS, PEAK, PRACTICAL FREQUENCY LIMIT, 1,000 MC/SEC, CONNECTS PLUG UG-154A/U, OR EQUAL, TO ADAPTER UG-216B/U, OR EQUAL

(A) ENTIRE STANDARD REVISED

(Project 5835-0122)

P A Ships	TITLE	MILITARY STANDARD
Other Cust SigC USAF	ADAPTER, CONNECTOR, SERIES LC, UG-287B/U	MS 91618
PROCUREMENT SPECIFICATION MIL-C-3850	SUPERSEDES	SHEET 1 OF 1