


FED. SUP CLASS  
2995

MS9138

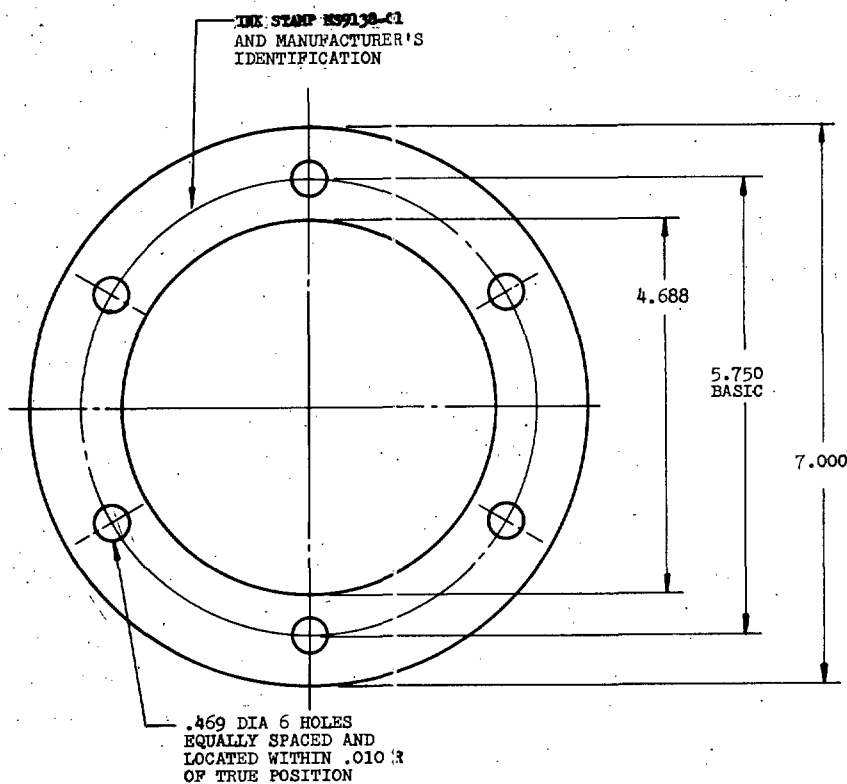

PART NO.	APPROX WT LB EA
MS9138-01	.026

1. MATERIAL: ASBESTOS AND SYNTHETIC RUBBER SHEET AMS 3232
2. EDGES SHALL BE CLEAN CUT.
3. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED; TOLERANCES: LINEAR DIMENSIONS  $\pm .010$ .
4. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION.

AS &amp; AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

P.A. USAF - 11	TITLE GASKET - TYPE XIV-C AND XIV-D ENGINE ACCESSORY DRIVE	MILITARY STANDARD MS9138
Other Cust Navy - WP Army - NO		
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN4058	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2995-0005-5

Review activities:  
USAF - 11, 71  
Navy - WP  
Army - NO

This military standard is approved by the Department of Defense and is mandatory on all activities. Submission for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED- 22 Jun 65  
REVISED