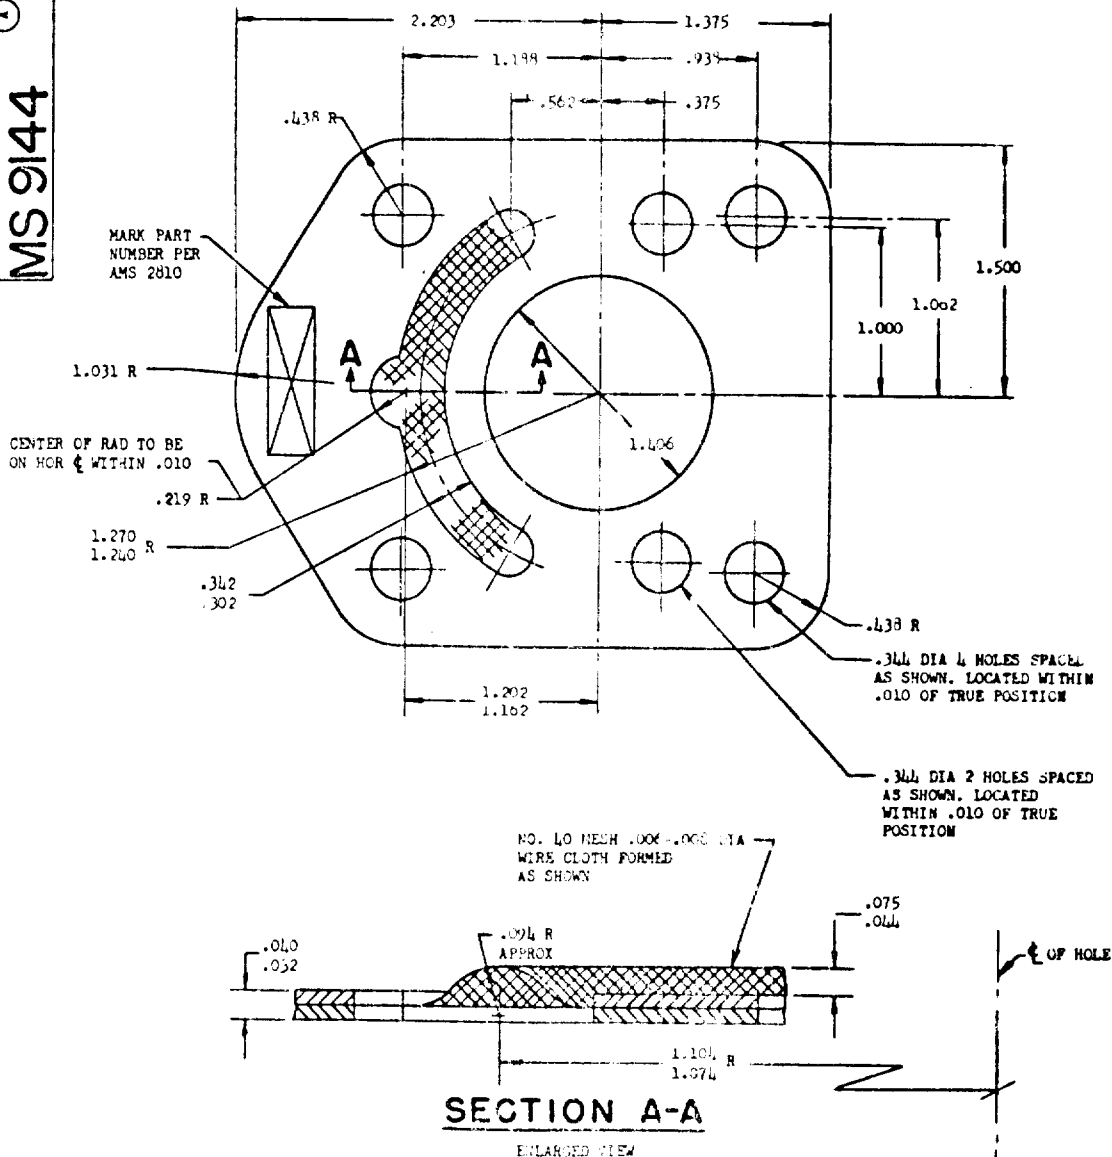


NOTE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any right or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the BuAeps (Department of the Navy) and the Department of the AFAP and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

A

MS 9144

FED. SUP CLASS
1610 A

MATERIAL: AMS 7263.

EDGES SHALL BE CLEAN CUT.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES, LINEAR DIMENSIONS $\pm .010$.

DIMENSIONS LOCATING TRUE POSITION ARE BASIC.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

P.A. Navy-Wep	TITLE GASKET - TYPE XX ENGINE ACCESSORY DRIVE	MILITARY STANDARD MS 9144 A
Other Cust USAF - AFSC Army-T		
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: MS100009 A	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

APPROVED
REVISED A 15 Jan 62