


NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as an endorsement, recommendation, or approval of the quality or value thereof, or as an endorsement of the particular method or material of manufacture or of the use thereof, or as a warranty of the quality or value thereof, or as a warranty of the fitness of the same for the purpose intended.

MS9274

MARK MATL IDENT AND MFR
IDENT PER AS478-30

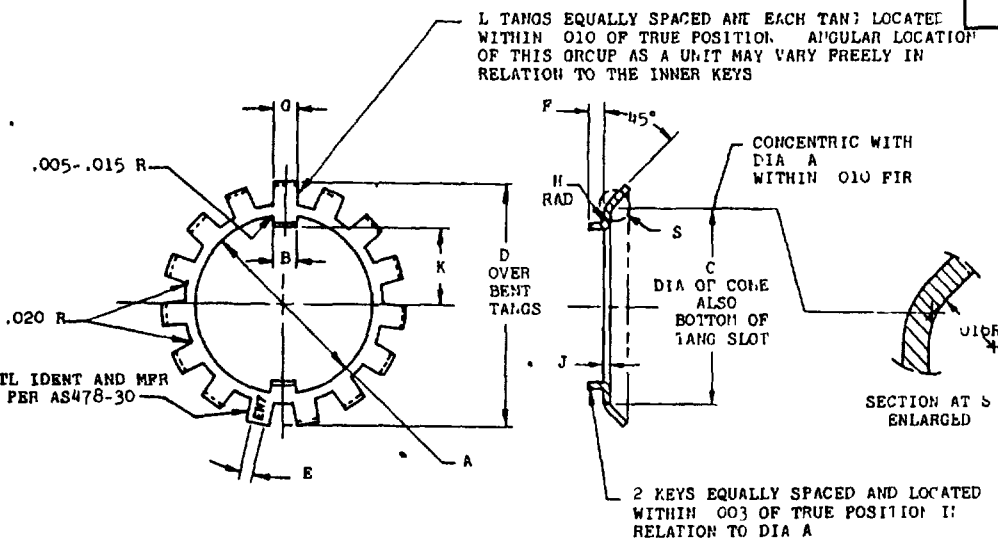

FED SUP CLASS
3110

PART NUMBER	NOMINAL BEARING BORE DIA	A + .010 - .000	B	C + .020 - .000	D + .000 - .030	E + .030 - .020	F + .000 - .020	G	H + .005 - .000	J	K + .000 - .000	L	APPROX WEIGHT LB
MS9274-10	.97	.427	.105- .115	.531	.828	.060	.094	.064- .094	.010	.029- .035	.100	.002	
MS9274-11	.4724	.507	.105- .115	.625	.922	.060	.094	.064- .094	.020	.029- .035	.100	.003	
MS9274-12	.5906	.616	.105- .115	.750	1.094	.060	.094	.064- .094	.030	.029- .035	.110	.004	
MS9274-13	.6693	.694	.105- .115	.875	1.203	.060	.094	.064- .094	.030	.029- .035	.110	.005	
MS9274-14	.7874	.820	.156- .176	1.000	1.375	.080	.094	.140- .156	.030	.036- .044	.110	.010	
MS9274-15	.9843	1.010	.156- .176	1.188	1.562	.080	.125	.140- .156	.040	.040- .044	.110	.012	
MS9274-16	1.1811	1.207	.156- .176	1.438	1.859	.080	.125	.146- .156	.040	.040- .044	.110	.015	
MS9274-17	1.3780	1.420	.156- .176	1.656	2.078	.120	.125	.146- .156	.040	.040- .044	.110	.021	
MS9274-18	1.5748	1.620	.280- .300	1.844	2.250	.120	.125	.204- .220	.040	.040- .044	.110	.026	
MS9274-19	1.7717	1.835	.280- .300	2.062	2.500	.120	.150	.204- .220	.040	.040- .044	.110	.030	
MS9274-20	1.9685	2.020	.280- .300	2.250	2.888	.120	.156	.204- .220	.040	.040- .044	.110	.032	
MS9274-21	2.1654	2.230	.280- .300	2.500	2.953	.120	.156	.204- .220	.040	.040- .044	.110	.046	
MS9274-22	2.3622	2.420	.280- .300	2.688	3.188	.120	.156	.204- .220	.040	.040- .044	.110	.050	
MS9274-23	2.5591	2.605	.280- .300	2.875	3.375	.120	.156	.204- .220	.040	.040- .044	.110	.054	
MS9274-24	2.7559	2.800	.280- .300	3.094	3.594	.120	.250	.204- .220	.060	.058- .068	.110	.060	
MS9274-25	2.9528	2.990	.280- .300	3.375	3.922	.120	.250	.297- .312	.070	.058- .068	.110	.080	
MS9274-26	3.1496	3.200	.340- .360	3.594	4.141	.120	.250	.297- .312	.070	.058- .068	.110	.091	
MS9274-27	3.3465	3.410	.340- .360	3.812	4.359	.120	.250	.297- .312	.080	.058- .068	.110	.094	
MS9274-28	3.5433	3.580	.340- .360	4.000	4.547	.120	.250	.297- .312	.080	.058- .068	.110	.098	
MS9274-29	3.7402	3.800	.340- .360	4.219	4.812	.120	.250	.297- .312	.080	.058- .068	.110	.104	
MS9274-30	3.9370	3.990	.340- .360	4.406	5.000	.120	.312	.297- .312	.080	.058- .068	.110	.107	
MS9274-31	4.1339	4.190	.340- .360	4.594	5.183	.120	.312	.360- .375	.080	.058- .068	.110	.117	
MS9274-32	4.3307	4.400	.340- .360	4.812	5.406	.120	.312	.360- .375	.080	.058- .068	.110	.121	

MATERIAL CORROSION AND HEAT RESISTANT STEEL AMS 5510

BREAK SHARP EDGES .003- .015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES, LINEAR DIMENSIONS $\pm .010$,
ANGULAR DIMENSIONS $\pm 2^\circ$
DO NOT USE UNASSIGNED PART NUMBERS
TRUE POSITION TOLERANCE SPECIFIED IS FOR MAXIMUM MATERIAL CONDITION

INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972.
NO SUPERSEDING STANDARD.

AS & AMS ARE SAE PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

CUSTODIANS Navy - AS P.A. USAF - II	MILITARY STANDARD	MS9274
PROCUREMENT SPECIFICATION None	WASHER, KEY-DOUBLE, BEARING RETAINING, AMS5510	SHEET 1 OF 1

FORM 233 E-25-58-2
1 NOV 56

REVISED 26 Oct 72
APPROVED 10 Feb 60