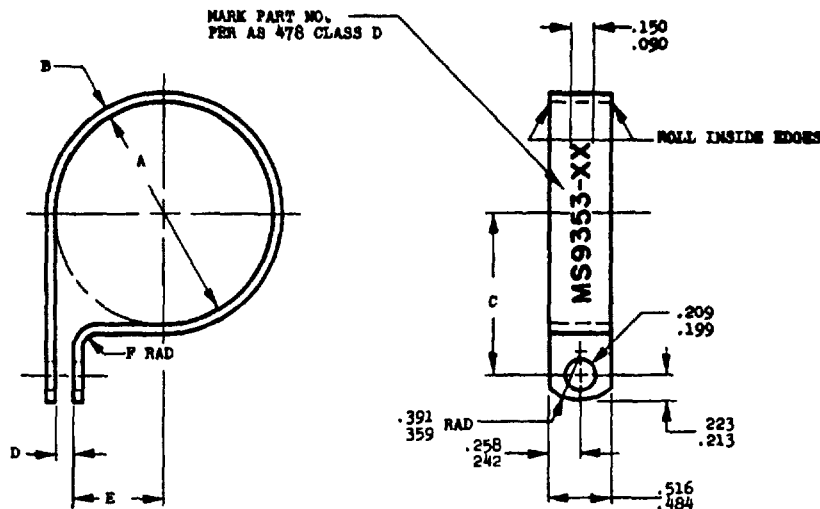


MS9353 (ASG)P/N 9353-XX
5940

PART NO.	NOM TUBE OD	A DIA BASIC	B ± .005	C ± .010	D	R REP	P RAD ± .016	APPROX WEIGHT LB/IN
MS9353-01	.125	.125	.031	.360	.062-.078	.000	.062	.002
MS9353-02	.188	.188	.031	.423	.062-.078	.031	.062	.002
MS9353-03	.250	.250	.031	.457	.062-.078	.062	.062	.003
MS9353-04	.312	.312	.031	.498	.062-.078	.094	.062	.003
MS9353-05	.375	.375	.031	.529	.062-.078	.125	.062	.003
MS9353-06	.438	.438	.031	.560	.062-.078	.156	.062	.004
MS9353-07	.500	.500	.031	.592	.062-.078	.188	.062	.004
MS9353-08	.562	.562	.031	.623	.062-.078	.219	.062	.004
MS9353-09	.625	.625	.031	.654	.062-.078	.250	.062	.005
MS9353-10	.688	.688	.051	.752	.062-.078	.281	.109	.008
MS9353-11	.750	.750	.051	.783	.062-.078	.312	.109	.009
MS9353-12	.812	.812	.051	.814	.062-.078	.344	.109	.011
MS9353-13	.875	.875	.051	.845	.062-.078	.375	.109	.011
MS9353-14	.938	.938	.051	.877	.062-.078	.406	.109	.011
MS9353-15	1.000	1.000	.051	.908	.062-.078	.438	.109	.011
MS9353-16	1.062	1.062	.051	.939	.062-.078	.469	.109	.012
MS9353-17	1.125	1.125	.051	.970	.062-.078	.500	.109	.012
MS9353-18	1.188	1.188	.051	1.002	.062-.078	.531	.109	.013
MS9353-19	1.250	1.250	.064	1.062	.094-.110	.531	.125	.017
MS9353-20	1.312	1.312	.064	1.093	.094-.110	.562	.125	.018
MS9353-21	1.375	1.375	.064	1.125	.094-.110	.594	.125	.018
MS9353-22	1.438	1.438	.064	1.156	.094-.110	.625	.125	.019
MS9353-23	1.500	1.500	.064	1.188	.094-.110	.656	.125	.019
MS9353-24	1.562	1.562	.064	1.219	.094-.110	.688	.125	.020
MS9353-25	1.625	1.625	.064	1.250	.094-.110	.719	.125	.021
MS9353-26	1.688	1.688	.064	1.281	.094-.125	.750	.125	.021
MS9353-27	1.750	1.750	.064	1.312	.094-.125	.781	.125	.022
MS9353-28	1.812	1.812	.064	1.344	.094-.125	.812	.125	.023
MS9353-29	1.875	1.875	.064	1.375	.094-.125	.844	.125	.023
MS9353-30	1.938	1.938	.064	1.406	.094-.125	.875	.125	.024
MS9353-31	2.000	2.000	.064	1.438	.094-.125	.906	.125	.024

MATERIAL: ALUMINUM AMS 4041
REMOVE BURRS AND SHARP EDGES
DIMENSIONS IN INCHES

CLAMP SHALL BE FORMED AS SHOWN. DIMENSION "D" SHALL FALL WITHIN THE SPECIFIED LIMITS WHEN CLAMP IS ASSEMBLED ON A BAR THE DIAMETER OF WHICH IS EQUAL TO THE NOMINAL TUBE OD WITHIN ±.001.
HOLES SHALL BE IN ALIGNMENT WITHIN .010 AND CLAMP SHALL BE FLAT WITHIN .010 THRU CLAMP WIDTH WHEN ASSEMBLED ON TEST BAR. IN THE FREE POSITION CLAMP MAY SPRING OPEN PROVIDED THE ABOVE CONDITIONS ARE MET.

DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.

THIS MILITARY STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE ALDOSPAC PROPULSION DIVISION.

P.A. USAF - 82

Other Cost

Navy - 45

MILITARY STANDARD

CLAMP, LOOP-ALUMINUM, .204 HOLE

MS9353 (ASG)

PROCUREMENT SPECIFICATION

SUPPLEMENT

SHEET 1

OF 1

SD FORM 670-1
1 607 82

5340 - 7005

Review activities:
USAF - 11, 85

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by those activities. All other military activities are required to employ this standard where suitable.

APPROVED 11 Aug 61 3 Mar 69