


FED SUP CLASS  
5340

MS9392 (ASG)

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have furnished or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use or sell any patented invention that may in any way be related thereto.

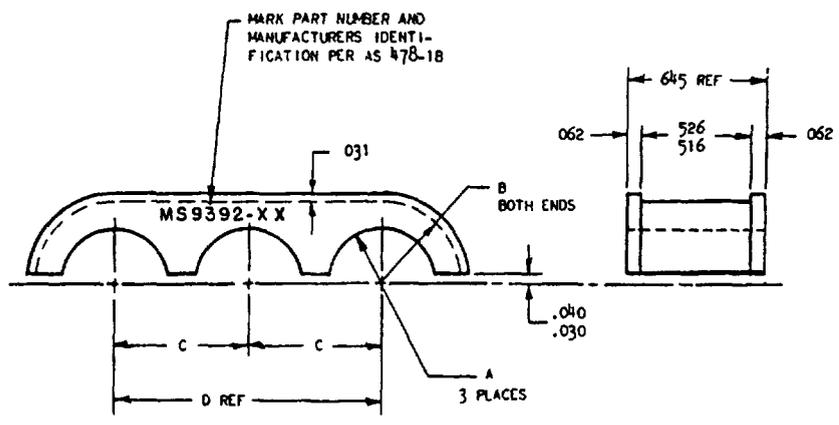

| PART NO.  | NOMINAL TUBE SIZE | A RAD<br>+ .010<br>- .000 | B RAD<br>± .005 | C<br>± .005 | D REF | APPROX WEIGHT LB/100 |
|-----------|-------------------|---------------------------|-----------------|-------------|-------|----------------------|
| MS9392-01 | .125              | .062                      | .125            | .188        | .375  | .152                 |
| MS9392-02 | .188              | .094                      | .156            | .250        | .500  | .222                 |
| MS9392-03 | .250              | .125                      | .219            | .344        | .688  | .447                 |
| MS9392-04 | .312              | .156                      | .250            | .406        | .812  | .577                 |
| MS9392-05 | .375              | .188                      | .281            | .469        | .938  | .684                 |
| MS9392-06 | .438              | .219                      | .312            | .531        | 1.062 | .807                 |
| MS9392-07 | .500              | .250                      | .375            | .625        | 1.250 | 1.218                |
| MS9392-08 | .562              | .281                      | .406            | .688        | 1.375 | 1.380                |
| MS9392-09 | .625              | .312                      | .438            | .750        | 1.500 | 1.540                |
| MS9392-10 | .688              | .344                      | .469            | .812        | 1.625 | 1.710                |
| MS9392-11 | .750              | .375                      | .500            | .875        | 1.750 | 1.900                |
| MS9392-12 | .812              | .406                      | .531            | .938        | 1.875 | 2.080                |
| MS9392-13 | .875              | .438                      | .562            | 1.000       | 2.000 | 2.250                |
| MS9392-14 | .938              | .469                      | .594            | 1.062       | 2.125 | 2.450                |
| MS9392-15 | 1.000             | .500                      | .625            | 1.125       | 2.250 | 2.640                |

1. MATERIAL: SILICONE RUBBER AMS 3303
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES, LINEAR DIMENSIONS ± .010
3. DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS PUBLICATIONS  
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

|  |  |                   |
|--|--|-------------------|
| P.A<br>USAF - APSC<br>Other Cust<br>NAVY - WEP | TITLE  | MILITARY STANDARD |
|  | CUSHION, LOOP CLAMP - MULTIPLE, 3-TUBE, AMS 3303 | MS9392 (ASG)      |
| PROCUREMENT SPECIFICATION HOWE                 | SUPERSEDES:                                      | SHEET 1 OF 1      |

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where applicable.

APPROVED 21 DEC 62  
REVISED