

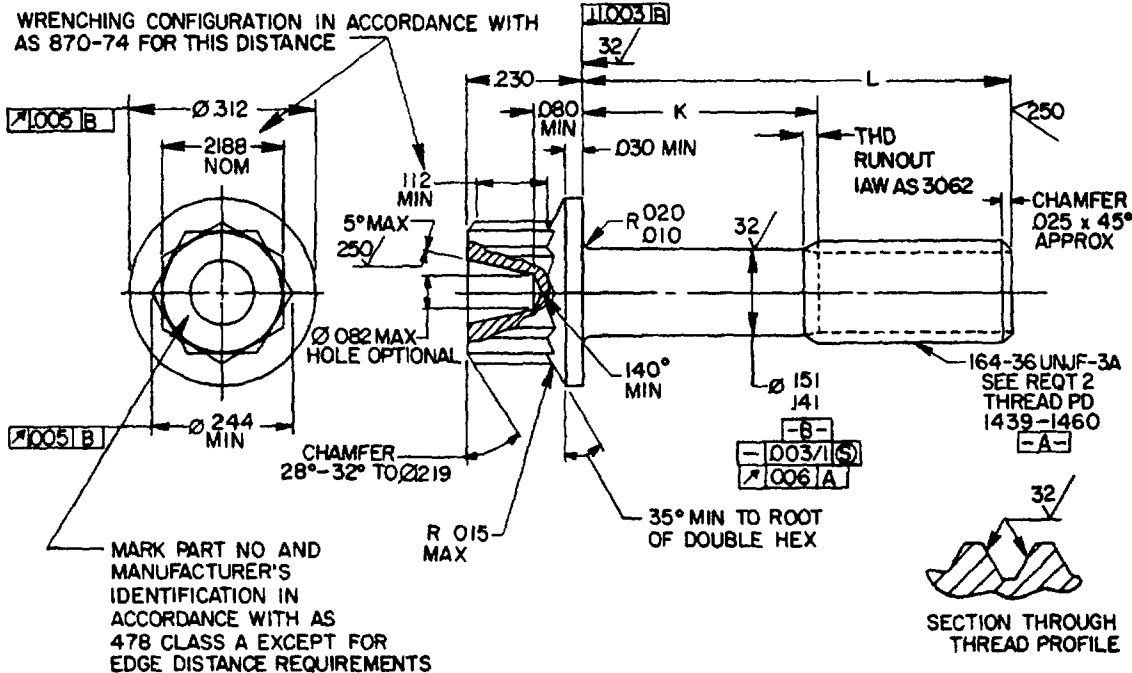
FED SUP CLASS
5305

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100	DASH NUMBER	L	K	APPROX WEIGHT LB/100
-02	.250	.062-.082	.420	-16	1.125	.487-.547	.847
-03	.312	.062-.082	.451	-17	1.188	.550-.610	.878
-04	.375	.062-.082	.482	-18	1.250	.612-.672	.908
-05	.438	.062-.082	.513	-19	1.312	.674-.734	.938
-06	.500	.062-.082	.543	-20	1.375	.737-.797	.969
-07	.562	.062-.082	.573	-21	1.438	.800-.860	.999
-08	.625	.062-.082	.604	-22	1.500	.862-.922	1.029
-09	.688	.062-.110	.634	-23	1.562	.924-.984	1.060
-10	.750	.112-.172	.664	-24	1.625	.987-1.047	1.090
-11	.812	.174-.234	.695	-25	1.688	1.050-1.110	1.121
-12	.875	.237-.297	.725	-26	1.750	1.112-1.172	1.151
-13	.938	.300-.360	.756	-27	1.875	1.237-1.297	1.212
-14	1.000	.362-.422	.786	-28	2.000	1.362-1.422	1.273
-15	1.062	.424-.484	.816	-29	1.812	1.174-1.234	1.182
				-30	1.938	1.300-1.360	1.243

© DENOTES CHANGE(S)

P.A. NAVY-AS Other Cust ARMY-AV AIR FORCE-99 PROCUREMENT SPECIFICATION AMS-7477	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-DOUBLE HEXAGON EXTENDED WASHER HEAD, CORROSION AND HEAT RESISTANT STEEL, 164-36 UNJF-3A	MILITARY STANDARD MS9555
SUPERSEDES		PAGE 1 OF 2	

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5305-1687

APPROVED 16 DEC 65 REVISED B 22 MAY 86 C 6 NOV 86

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-15

USER ACTIVITIES.

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-1S


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL. CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5731-85.
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
4. HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -11 AND SMALLER.
5. FLOURESCENT PENETRANT INSPECTION: FLOURESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645-83.
6. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD IN ACCORDANCE WITH ANSI B46.1.
7. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS $\pm .010$, ANGULAR DIMENSIONS $\pm 5^\circ$.
8. EDGES. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE.

EXAMPLE: MS9555-02

MS9555-02 INDICATES: SCREW, MACHINE-DOUBLE HEXAGON EXTENDED WASHER
HEAD, .164-36 UNJF-3A, LENGTH .250.

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 16 DEC 65 REVISED © FOR CHANGES SEE PAGE(S) 1

P. A. NAVY-AS Other Code ARMY-AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-DOUBLE HEXAGON, EXTENDED WASHER HEAD, CORROSION AND HEAT RESISTANT STEEL, .164-36 UNJF-3A	MILITARY STANDARD
			MS 9555
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDED	PAGE 2 OF 2	