


2995-0087

FED. SUP CLASS
2995

MS 9971

User activities:
Navy - MC, CGReview activities:
Air Force - 71

This military standard is sponsored for use by all Departments and Agencies of the Department of Defense. Section for all new engineering and design applications and for repetitive use shall be made from this standard.

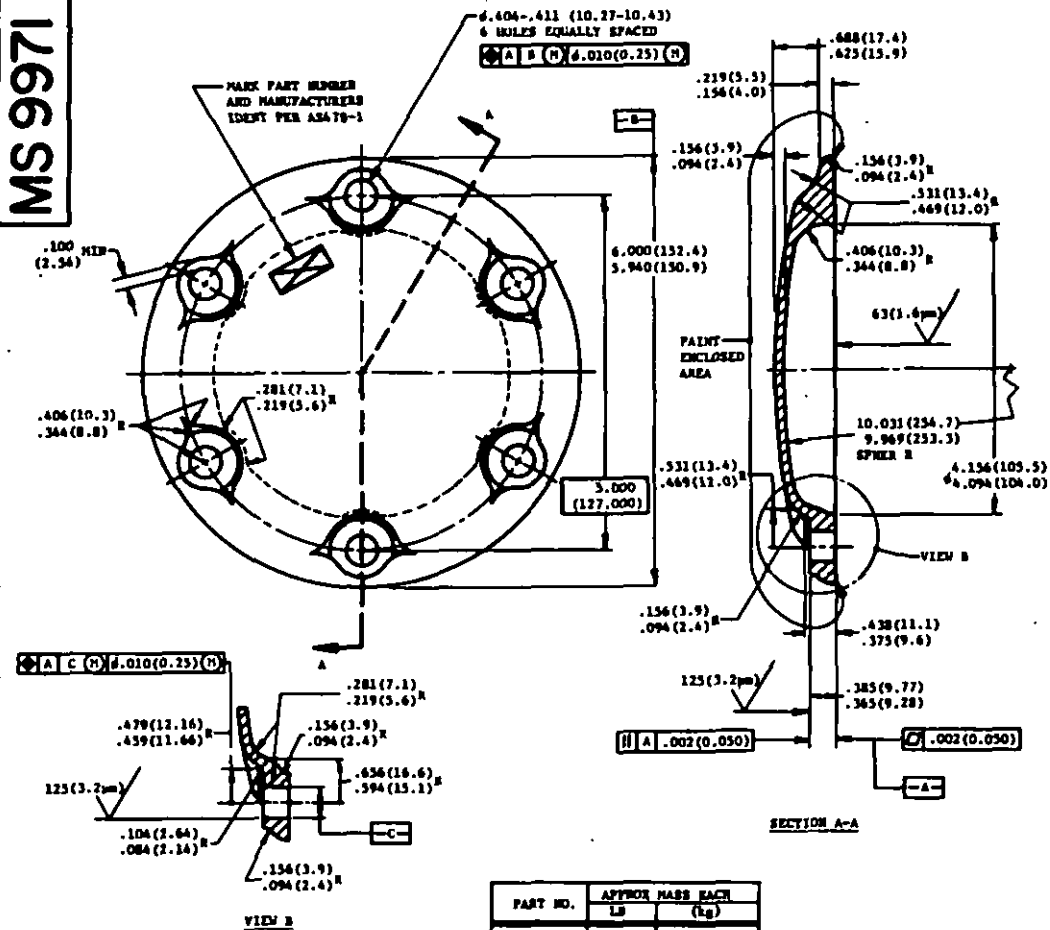

1. MATERIAL: ALUMINUM AMS 4212 OR AMS 4281.
2. PARTING LINES OF CASTINGS ARE TO BE COMMERCIAL CLEAN.
3. SURFACE TEXTURE: AMS 846.1, UNSPECIFIED SURFACES AS CAST.
4. FLUORESCENT PENETRANT INSPECTION PER AMS 2643.
5. FINISH: ANODIC TREAT ALL OVER PER AMS 2470 OR AMS 2471. PAINT PER AMS 2510 WHERE SHOWN. DIMENSIONS APPLY BEFORE PAINTING.
6. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES. METRIC CONVERSIONS IN PARENTHESES ARE INTERNATIONAL SYSTEM UNITS (SI).
8. DIMENSIONING AND TOLERANCING: ANSI Y14.5, ϕ = DIAMETER.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE AIR FORCE PART STANDARDS DIVISION.

P.A. Air Force - 11
Other Cost
Navy - AS


TITLE

COVER, ACCESSORY DRIVE, 5 INCHES (127 mm) RC ROUND, ALUMINUM

PROCUREMENT SPECIFICATION
SEE NOTES

SUPERSEDES:

THIRD ANGLE PROJECTION



MILITARY STANDARD

MS 9971

SHEET 1 OF 1

DD FORM 672-1

U.S. GOVERNMENT PRINTING OFFICE: 1973-715148/1004

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 1 Oct 73 REVISED