


# Goddard Space Flight Center

## Rules for the Design, Development, Verification, and Operation of Flight Systems

GSFC – STD – 1000  
Baseline Release  
December 10, 2004



## Goddard Space Flight Center

### Rules for the Design, Development, Verification, and Operation of Flight Systems

GSFC – STD – 1000  
Baseline Release  
December 10, 2004

Approved by: \_\_\_\_\_

C. J. Scolese  
Deputy Director

\_\_\_\_\_  
Richard M. Day  
Director of Independent Technical Authority  
Governance and Systems Management Office

\_\_\_\_\_  
Abigail D. Harper  
Deputy Director of Systems Safety and  
Mission Assurance

\_\_\_\_\_  
Arthur F. Obenschain  
Director of Flight Programs and  
Projects

\_\_\_\_\_  
Michael G. Ryschkewitsch  
Director of Applied Engineering  
and Technology

## TABLE OF CONTENTS

Introduction	5
Standards, Processes, and Rules Hierarchy	6
Goddard Open Learning Design (G.O.L.D) Standard Architecture	7
GSFC Project Lifecycle	8
Domain Icon Legend	9
User's Guide	10
GSFC Rules	
1.01 Requirements Management	11
1.02 Development & Implementation of Mission Operations Concept	12
1.03 Verification of Mission Requirements	13
1.04 Reserved	
1.05 Single Point Failures	14
1.06 Resource Margins	15
1.07 End-to-End GN&C Phasing	17
1.08 Reserved	
1.09 Reserved	
1.10 Logistics and Spares	18
1.11 Qualification of Heritage Flight Hardware	19
1.12 Units of Measurement	20
1.13 Performance Demonstration During Qualification Testing	21
1.14 Mission Critical Telemetry	22
1.15 GSE Use at Launch Site	23
1.16 Ground Systems Configuration	24
1.17 Safe Hold Mode	25
1.18 Reserved	
1.19 Initial Thruster Firing Limitations	26
1.20 Manifold Joints of Hazardous Propellants	27
1.21 Overpressurization Protection in Liquid Propulsion Systems	28

1.22	Purging of Residual Test Fluids	29
1.23	Reserved	
1.24	Propulsion System Safety Electrical Disconnect	30
1.25	Reserved	
1.26	Independence of Safety Inhibits	31
1.27	Propulsion System Overtemp Fuse	32
1.28	Unintended Propellant Vapor Ignition	33
1.29	Reserved	
1.30	Controller Stability Margins	34
1.31	Actuator Sizing Margins	35
1.32	Thruster and Venting Impingement	36
1.33	Polarity Checks of Critical Components	37
1.34	Closeout Photo Documentation of Key Assemblies	38
2.01	Flight Electronic Hardware Operating Time	39
2.02	EEE Parts Program for Flight Missions	40
2.03	Radiation Hardness Assurance Program	41
2.04	Dedicated Hardware ETU and EGSE	42
2.05	System Grounding Architecture	43
2.06	System Fusing Architecture	44
2.07	End-to-End Test of Release Mechanism for Flight Deployables	45
2.08	Reserved	
2.09	Spectrum Allocation Considerations	46
2.10	Electronic Design for Flight Missions	47
2.11	EMI/EMC Design for Flight Missions	48
2.12	Printed Circuit Board Coupon Analysis	49
2.13	Electrical Connector Mating	50
3.01	Verification+Validation Program for Mission Software Systems	51
3.02	Reserved	
3.03	High Fidelity Interface Simulation Capabilities	52
3.04	T&C System Selection Trade Study for Operations Ground System	53

3.05	Flight / Ground System Test Capabilities	54
3.06	Dedicated ETU for Flight Software (FSW) Testing	55
3.07	Flight Software Margin Warnings	56
3.08	Reserved	
3.09	Software Development Approach	60
3.10	Flight Operations Preparations and Team Development	61
4.01	Contamination Control, Planning, and Execution	62
4.02	Reserved	
4.03	Structural Analysis and Design Factors of Safety	63
4.04	Reserved	
4.05	Reserved	
4.06	Validation of Thermal Coatings Properties	64
4.07	Solder Joint Intermetallics Mitigation	65
4.08	Space Environment Effects on Material Selection	66
4.09	Mechanical Test Factors and Duration	67
4.10	Minimum Workmanship	68
4.11	Testing in Flight Configuration	69
4.12	Structural Proof Testing	70
4.13	Modal Survey Characterization	71
4.14	Structural Qualification	72
4.15	Torque Margin	73
4.16	Reserved	
4.17	Limits of Certain Alloy Types	74
4.18	Deployment and Articulation Verification	75
4.19	Reserved	
4.20	Fastener Locking	76
4.21	Reserved	
4.22	Precision Component Assembly	77
4.23	Life Test	78
4.24	Mechanical Clearance Verification	79

4.25	Thermal Design Margins	80
4.26	Thermal Design Margins - Unplanned Conditions	81
4.27	Test Temperature Margins	82
4.28	Thermal Design Margin Verification	83
4.29	Thermal-Vacuum Cycling	84
5.01	Maturity of New Technologies	85
5.02	Reserved	
5.03	Reserved	
5.04	Instrument Testing for Multipaction	86
5.05	Fluid Systems GSE	87
5.06	Flight Instrument Characterization Standard	88
5.07	Laser Design	89
5.08	Laser Development Contamination Control	90
5.09	Cryogenic Pressure Relief	91
	Glossary	92

## INTRODUCTION


Goddard Space Flight Center (GSFC) Rules are a high-level subset of all the design rules required for safety and mission success for all space flight products. These rules spell out the technical or design requirements that every Goddard project shall meet regardless of its implementation approach. GSFC Rules are not replacements for existing Goddard Procedures and Guidelines (GPGs) or NASA Procedures and Guidelines (NPGs). NPGs and GPGs are specific, detailed procedures for implementing NASA and Goddard policies, and as such they often address project management requirements per NASA Procedural Requirements (NPR) 7120.5 that do not fall within the scope of the GSFC Rules. Figure 1 provides a hierarchy of where the GSFC Rules fit within the Center's larger collection of rules. Figure 2 illustrates the role the GSFC Rules play in the Goddard Open Learning Design (G.O.L.D.) approach to knowledge management. GSFC Rules are not intended to serve as a "cookbook" or "how-to" guide, but rather as another tool for assessing overall project risk and assuring mission success.

GSFC Rules are defined and apply in relation to the lifecycle of a mission or project. (See Figure 3.) All products shall be designed, developed, verified and operated in accordance with the GSFC Rules. Exceptions shall be permitted only by formal waiver or deviation, processed and approved in accordance with GPG 8070.4, or by virtue of the requirement's non-applicability to the product, as explicitly stated in the rule.

The Independent Technical Authority Governance and Systems Management Office (ITA/SMO) shall develop and maintain the GSFC Rules for the Design, Development, Verification, and Operation of Flight Systems. GSFC Rules shall adhere to the following criteria:


- a) it is a high-value principle to establish the methodology necessary to consistently and efficiently achieve safety and mission success;
- b) it is important enough to require compliance, or formal waivers, for all GSFC projects;
- c) the rationale is based on sound engineering practice, systems management principles, or lessons learned; and
- d) a system engineering product or other objective verification method is identified at one or more milestones in the project life cycle.

GSFC Rules shall be configuration-controlled and accessible to all GSFC employees. A technical authority designated for each rule will be responsible for validating the principle, rationale, verification requirements, related guidance and lessons learned, and participating in the evaluation of proposed changes, waivers and deviations.

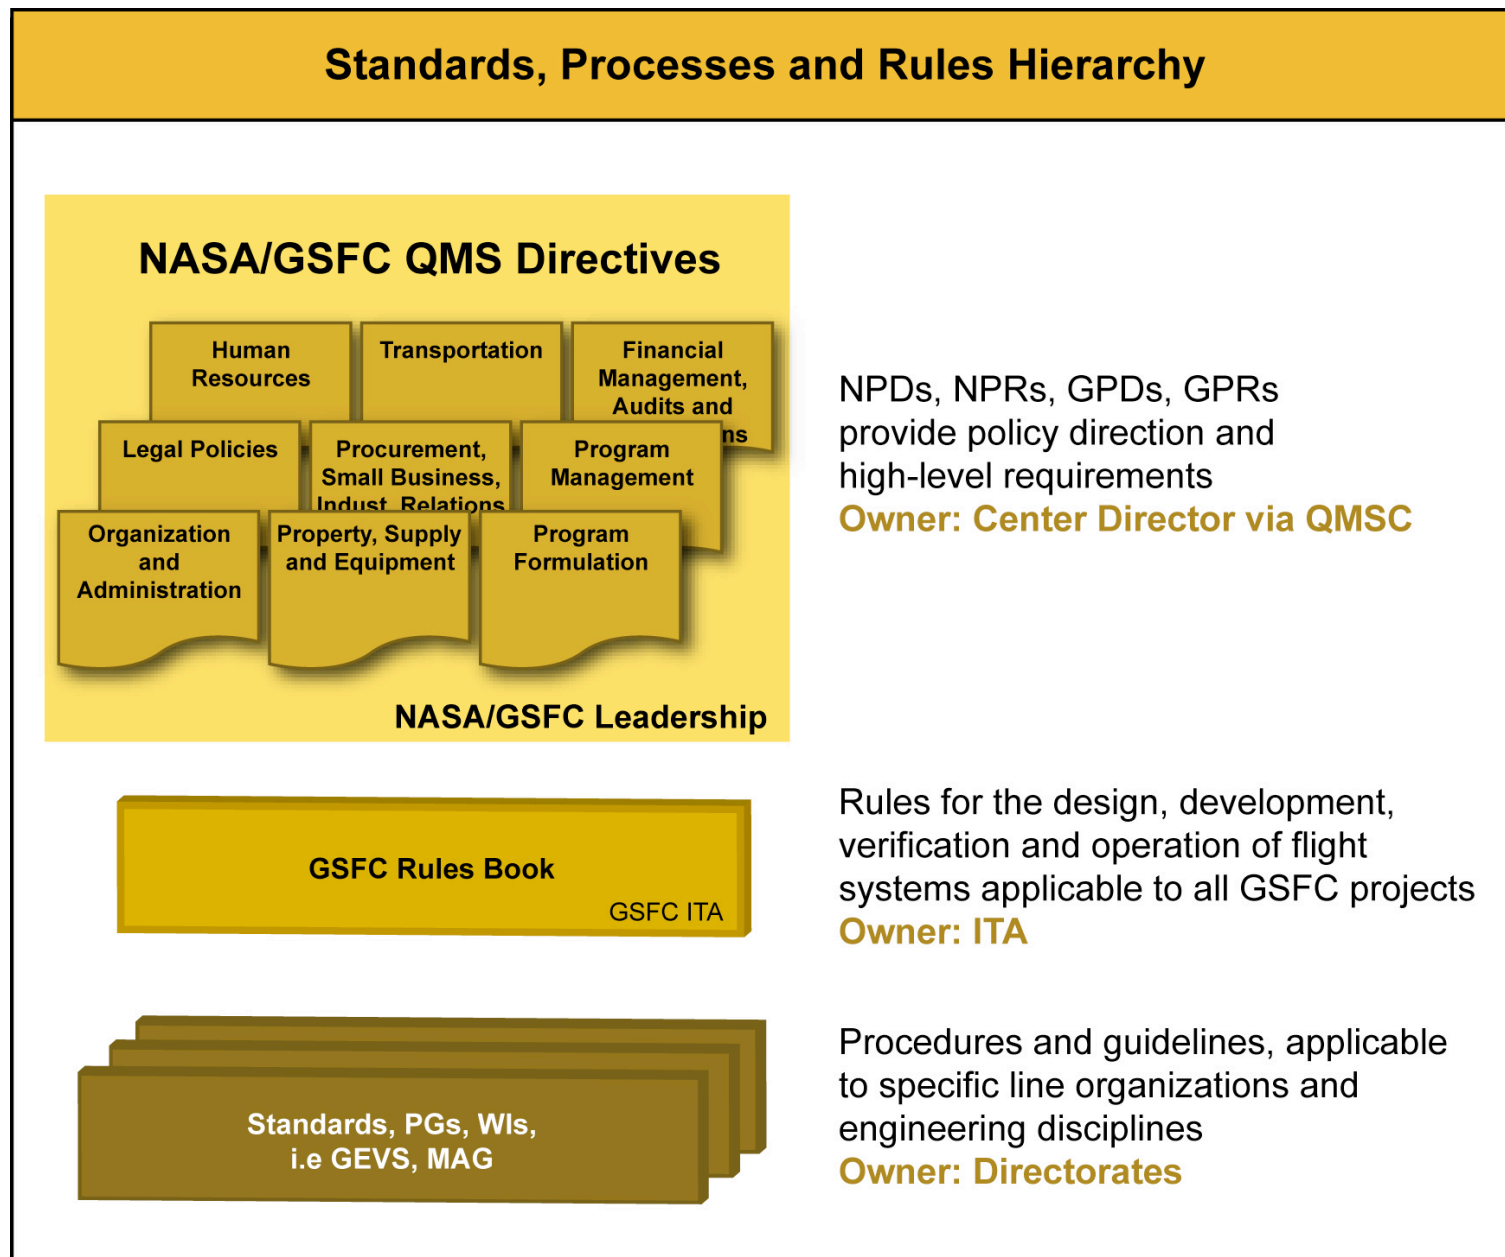

*Figure 1*



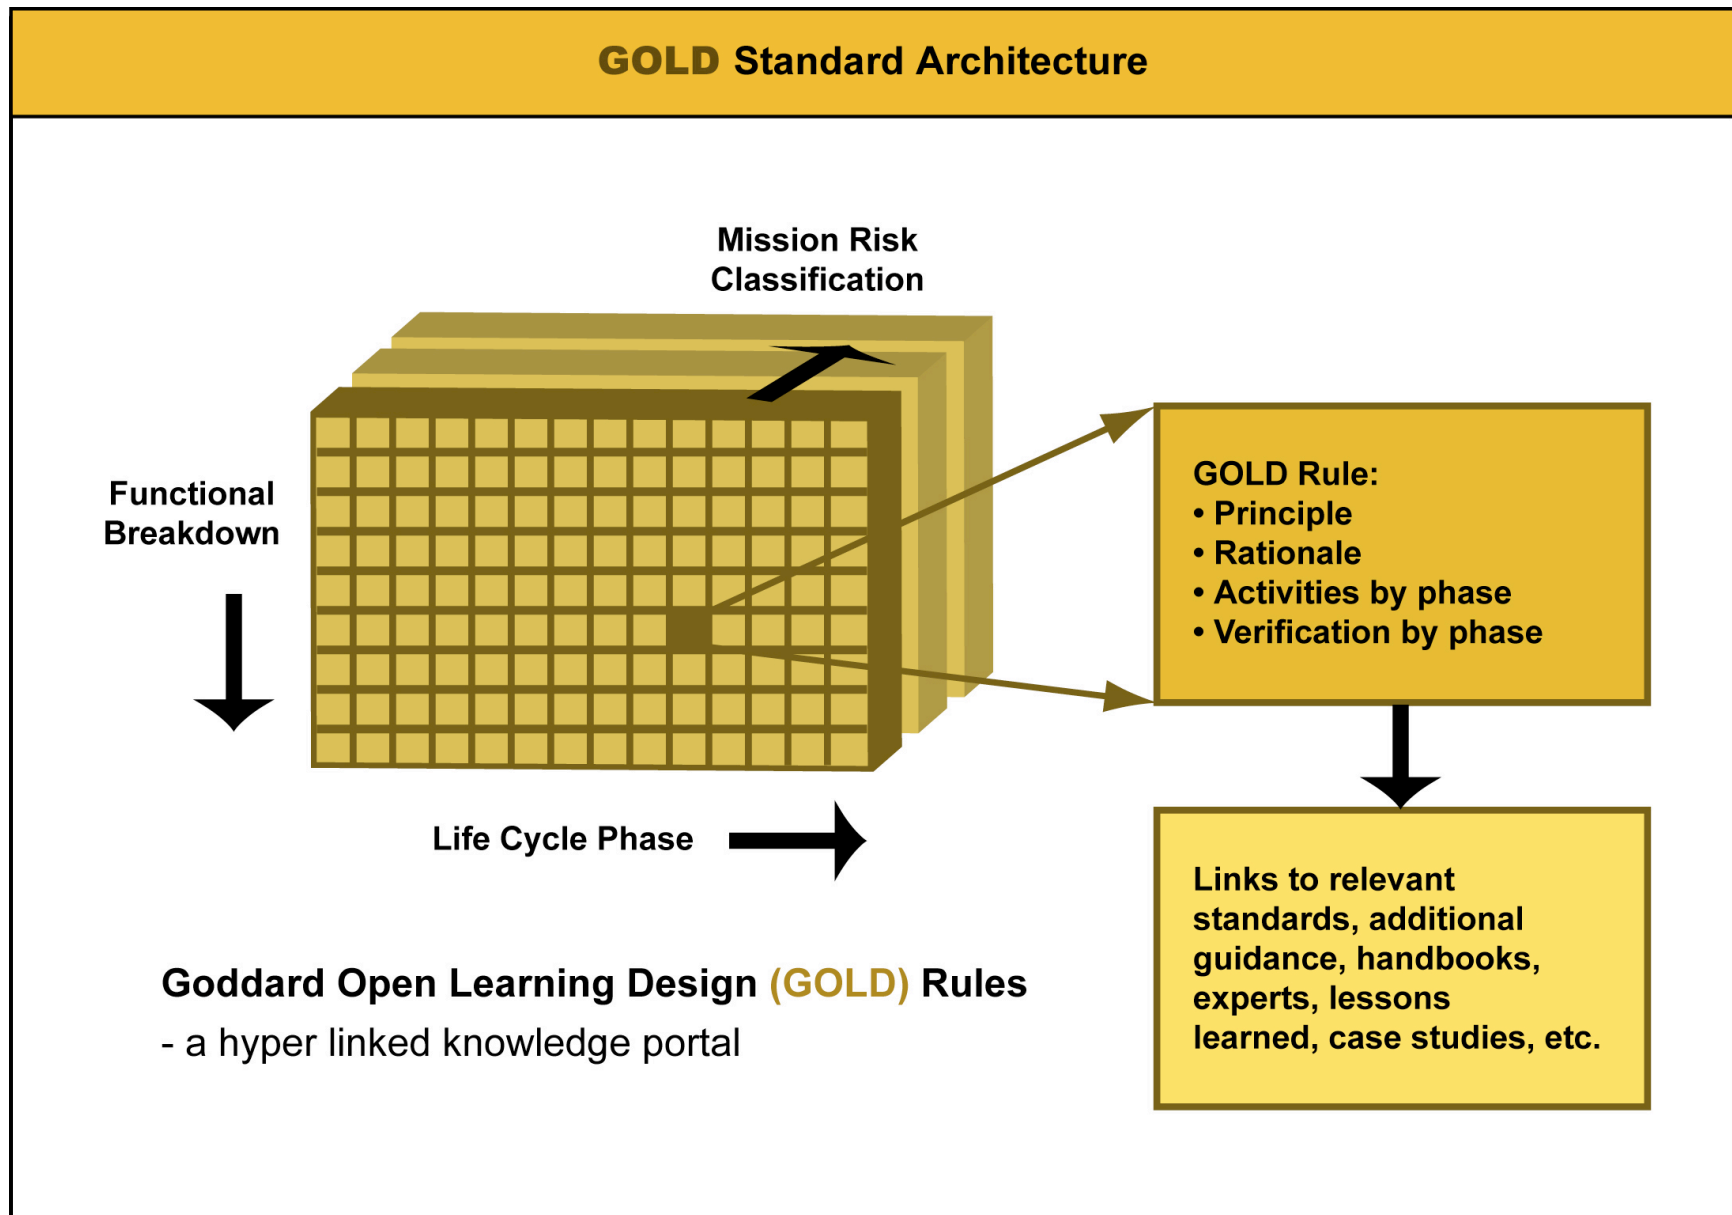

\* Mission risk classification will be addressed in a future revision.

*Figure 2*

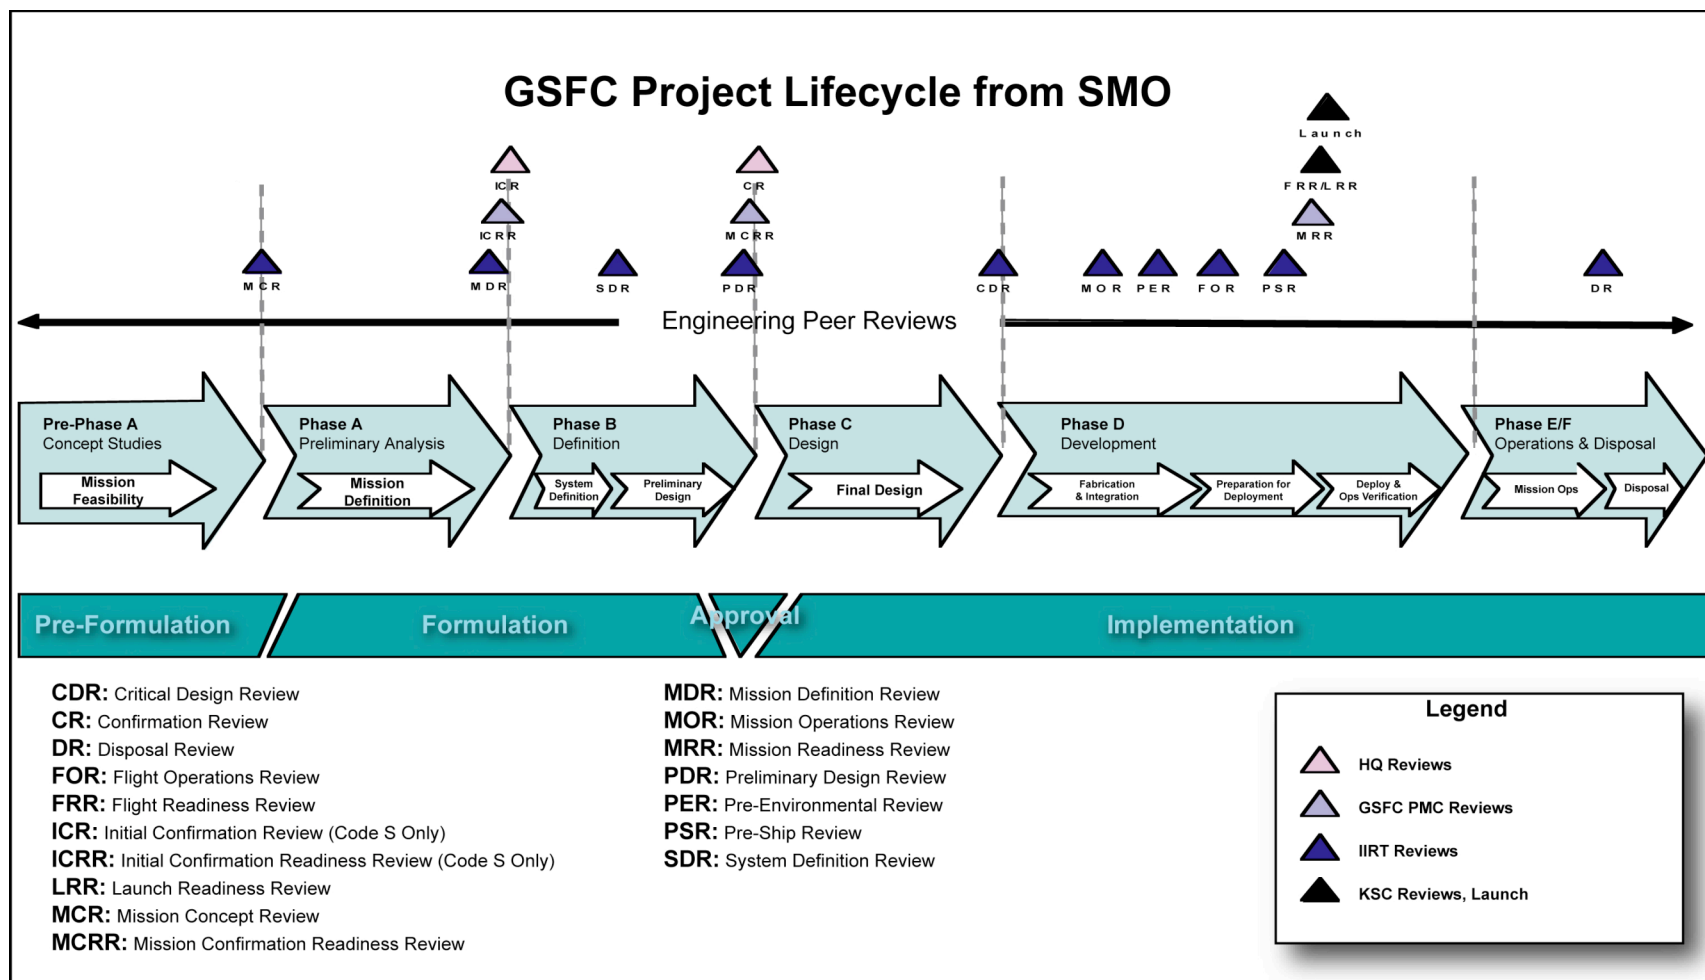


Figure 3

## DOMAIN ICON LEGEND



*Figure 4*

Note: Some rules are cross-listed for multiple domains, but only one icon is displayed. The icon corresponds with the domain that exercises ownership of the rule. Rules are potentially applicable across all domains.

## USER'S GUIDE

Domain: The technical discipline(s) where a rule resides.

Principle: A declarative sentence that uses a "shall" statement.

Rationale: A sentence that explains why a rule is necessary.

Activities: A declarative sentence that states the activities or products necessary to fulfill a rule in a given phase.

Verification: A declarative sentence that explains how the fulfillment of requirements will be verified.
















4.25		Thermal Design Margins				Mechanical			
<b>Principle:</b> Thermal design shall provide adequate margin between stacked worst-case flight predictions and component allowable flight temperature limits. Note: This applies to normal operations and planned contingency modes. This does not apply to cryogenic systems.									
<b>Rationale:</b> Positive temperature margins are required to account for uncertainties in power dissipations, environments, and thermal system parameters.									
<b>Phase:</b>									
<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>									
<b>Activities:</b>									
<div><div>1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin. For Pre-A, larger margins advisable.</div><div>1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin. For Phase A, larger margins advisable.</div><div>1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.</div><div>1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.</div><div>1. System thermal balance test produces test-correlated model. Test and worst-case flight thermal analysis with test-correlated model demonstrate minimum 5C margins, except for heater controlled elements which demonstrate a maximum 70% heater duty cycle, and two-phase flow systems which demonstrate a minimum 30% heat transport margin.</div><div>1. Thermal analysis with flight-correlated model shows minimum 5C margins for mission trade studies, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.</div><div>1. Thermal analysis with flight-correlated model shows minimum 5C margins for mission disposal options, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.</div></div>									
<b>Verification:</b>									
<div><div>1. Verify at MCR.</div><div>1. Verify worst-case thermal analysis of concept through peer review and at SRR and MDR.</div><div>1. Verify worst-case thermal analysis of design through peer review and at PDR.</div><div>1. Verify worst-case thermal analysis of detailed design through peer review and at CDR.</div><div>1. Verify through peer review and at PER and PSR.</div><div>1. Verify thermal analysis of flight system using flight-correlated thermal model through peer review.</div><div>1. Verify thermal analysis of flight system using flight-correlated thermal model through peer review.</div></div>									
<b>Revision Status:</b> Baseline Release December 6, 2004					<b>Owner:</b> Thermal Engineering Branch (545)			<b>Reference:</b> GEVS 2.63; 545-PG-8700.2.1	

Figure 5



**Principle:** A requirements management process shall be developed throughout the lifecycle that includes requirements identification, tracking, and documentation as well as a flow-down and traceability of Level 1 requirements to implementation requirements.








**Rationale:** Clear, traceable requirements lead to a good understanding of how high level objectives and requirements drive mission design and success.

Phase:							
<b>Activities:</b>	1. Develop traceability matrix. 2. Develop draft Mission Requirements Document.	1. Update traceability matrix. 2. Define traceable Level 2 requirements in Mission Requirements Document. 3. Identify requirements management tools for Phases B, C, & D. 4. Validate consistency of requirements from all mission elements.	1. Update Mission Requirements Document and put under CM. 2. Implement requirements management tool. 3. Identify documentation structure required to define implementation of Level 2, 3, and 4 requirements. 4. Define Level 3 and 4 requirements and draft requirement documents. 5. Develop SEMP.	1. Update Mission Requirements Document. 2. Track changes to Level 2, 3, and 4 requirements.	1. Verify consistency of requirements in traceability matrix. 2. Document requirements verification.	1. Verify that mission operations requirements are still valid and make appropriate contingency plans.	1. Verify that disposal requirements are still valid and make appropriate contingency plans.
<b>Verification:</b>	1. Verify through project team concurrence, peer review, and at MCR.	1. Verify at MRR and MDR.	1. Verify at PDR.	1. Verify through peer review and at CDR.	1. Verify through peer review and at PER, MOR, FOR, and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)			<b>Reference:</b>	



**Principle:** The Mission Operations Concept and Plan shall be defined and its implementation shall be verified throughout the lifecycle.








**Rationale:** The Mission Operations Plan is critical to the development of mission architecture necessary for a successful launch, deployment, commission, operation, and disposal.

Phase:							
<b>Activities:</b>	1. Establish and document a concept for operations that incorporates instrument operations concept and accomplishes Level 1 requirements.	1. Identify all mission operation modes and configurations. 2. Update concept for operations. 3. Develop a concept for ground system design.	1. Draft Operations Concept. 2. Identify contingency concepts and safe hold modes. 3. Develop requirements for ground system.	1. Draft Operations Plan. 2. Begin development of operations procedures for ground system.	1. Update Operations Plan and put under CM. 2. Perform mission simulations and testing to verify Operations Plan, utilizing mission elements including ground system operations procedures. 3. Complete operations procedures.	1. Update post-launch changes to Operations Plan and document operational constraints.	1. Perform disposal operations per Operations Plan.
<b>Verification:</b>	1. Verify at MCR.	1. Verify through project team concurrence and at MRR and MDR.	1. Verify through peer review and at PDR.	1. Verify through peer review and at CDR.	1. Verify at MOR, FOR, LRR, and PSR, and ORR.	N/A	1. Verify at DR.
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)			<b>Reference:</b>	



**Principle:** A process that ensures all mission requirements are verified shall be developed.








**Rationale:** Mission success requires that mission functions can be achieved and that system designs are implemented correctly.

Phase:							
<b>Activities:</b>	1. Develop a verification matrix that identifies a verification method for all system functions that are critical to mission success.	1. Update draft verification matrix.	1. Draft a verification plan that identifies items and interfaces as well as functions to be verified, the verification method, and the method of approving results as well as necessary equipment, tools and facilities.	1. Update verification plan to include verification method for all requirements and mission-critical functions. 2. Draft a Comprehensive Performance Test Plan. 3. Put all plans under CM.	1. Prepare verification plans for tests, simulations or inspections. 2. Perform verifications; analyze and document results.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at SDR and PDR.	1. Verify at CDR.	1. Verify at subsystem peer review, PER, PSR, LRR, and MRR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)			<b>Reference:</b>	



**Principle:** Single point failures that inhibit the ability to fully meet minimum mission success requirements shall be identified, and the risk associated with each shall be characterized, managed, and tracked.

**Rationale:** Robust design approaches make the elimination of single point failures desirable. From a risk management perspective, it is recognized that the acceptance of some single point failures may be prudent. In these cases, it is essential to understand the attendant risks and receive approval from senior management.

Phase:							
<b>Activities:</b>	1. Identify all requirements necessary for minimum mission success. 2. Determine if a breach of any of these requirements will cause the minimum mission to fail.	1. Identify failures that would cause the minimum mission to fail and develop a design strategy to avoid single point failures.	1. Identify failures for all hardware and software that performs mission-critical functions. 2. Develop a design to avoid single point failures.	1. Design mission-critical elements to avoid single point failures.	1. Verify that there are no single string failures in mission elements that are necessary for minimum mission success.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER and PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mission Engineering and Systems Analysis Division (590)








**Reference:**





**Principle:** Resource margins shall be met in accordance with Table 1.06-1.

**Rationale:** Compliance with these margins improves performance on cost and schedule as well as overall mission performance.  
NOTE: Flight software margin warnings are covered in Rule 3.07.

Phase:							
<b>Activities:</b>	1. Identify resource margins. 2. Identify the per cent of resource that was determined by estimation, calculation or measurement.	1. Update resource margins. 2. Identify the per cent of resource that was determined by estimation, calculation or measurement.	1. Update resource margins. 2. Identify the per cent of resource that was determined by estimation, calculation or measurement.	1. Update resource margins. 2. Identify the percent of resource that was determined by estimation, calculation or measurement.	1. Update resource margins.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at ICR and MDR.	1. Verify at PDR and confirmation review.	1. Verify at CDR.	1. Verify at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)			<b>Reference:</b> Guidelines for Margins (future)	

**Table 1.06-1 Technical Resource Margins**  
All values are assumed to be at the end of the phase

Resource	Pre-Phase A	Phase A	Phase B	Phase C	Phase D	Phase E
<b>Mass</b>	≥30%	≥25%	≥20%	≥15%	0	
<b>Power (wrt EOL capacity)</b>	≥30%	≥25%	≥15%	≥15%	≥10% *	
<b>Propellant</b>	3σ***				3σ	
<b>Telemetry and Command hardware channels**</b>	≥25%	≥20%	≥15%	≥10%	0	
<b>RF Link</b>	3 dB	3 dB	3 dB	3 dB	3 dB	
Margin (in percent)= (Available Resource-Estimated Value of Resource)/Estimated Resource X 100						
<p>*At launch there shall be 10% predicted power margin for mission critical, cruise and safing operating modes as well as to accommodate in-flight operational uncertainties.</p> <p>** Telemetry and command hardware channels read data from hardware such as thermistors, heaters, switches, motors, etc.</p> <p>*** The 3 sigma variation is due to the following: 1. Worst-case spacecraft mass properties 2. 3-sigma low launch vehicle performance 3. 3-sigma low propulsion subsystem performance (thruster performance/alignment, propellant residuals) 4. 3-sigma flight dynamics errors and constraints 5. Thruster failure (applies only to single-fault-tolerant systems)</p>						

1.07








## End-to-End GN&amp;C Phasing

Systems Engineering



**Principle:** All GN&C sensors and actuators shall undergo end-to-end phasing/polarity testing after spacecraft integration and shall have flight software mitigations to correct errors efficiently.








**Rationale:** Many spacecraft have had serious on-orbit problems due to inadequate verification of signal phasing or polarity. Component-level and end-to-end phasing tests and flight software mitigations can ensure correct operation.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Define interface requirements of sensors and actuators. 2. Design flight software to include capability to fix polarity problems via table upload.	1. Update ICDs to include polarity definition 2. Review vendor unit-level phasing test plans. 3. Write flight S/W to include capability to fix polarity problems via table upload. 4. Create unit-level & end-to-end phasing test plan.	1. Perform unit-level phasing tests. 2. Test flight S/W for table upload functionality. 3. Perform end-to-end phasing test for all sensor-to-actuator combinations. 4. Develop & test contingency flight ops procedures for fixing phasing problems.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify through peer review and at PDR.	1. Verify through peer review and at CDR.	1. Verify at PSR and LRR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Flight Dynamics Analysis Branch (595)			<b>Reference:</b>	



**Principle:** All projects shall define a plan for required spare units (including spare EEE parts) that is compatible with available resources and acceptable risk.

**Rationale:** An inadequate spare parts program leads to part shortages during the development phase and has a direct impact on potential workarounds or retrofit plans.

Phase:							
<b>Activities:</b>	N/A	1. Address spare parts program and acquisition strategy for critical long lead items in concept study. 2. Define preliminary parts plan. 3. Identify parts list and ETUs required for life testing. 4. Identify critical parts that require spares.	1. Identify parts acquisition plan for long lead parts. 2. Update preliminary parts plan. 3. Develop acquisition strategy for parts and ETUs for life testing and critical parts that require spares.	1. Finalize parts plan. 2. Implement acquisition strategy for parts and ETUs for life testing and critical parts that require spares. 3. Begin life testing where relevant.	1. Track critical spare parts and prepare specific risk mitigation plans(s) for lower quantity spares.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	Verify at MRR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**








Mission Engineering and Systems Analysis Division (590)

**Reference:**



**Principle:** All use of heritage flight hardware shall be fully qualified and verified for use in its new application. This qualification shall take into consideration necessary design modifications, changes to expected environments, and differences in operational use.








**Rationale:** All hardware, whether heritage or not, needs to be qualified for its expected environment and operational uses.

Phase:							
<b>Activities:</b>	1. Identify/list heritage hardware to be used and make a cursory assessment of 'use as is' or delta-qual.	1. Update hardware list and identify the qualification requirements. 2. Assess through the peer review process the ultimate applicability of previously flown/ heritage hardware designs.	1. Refine/finalize heritage hardware list and the required qualification requirements.	1. Qualify heritage hardware as part of overall qualification of mission hardware.	1. Develop, test, and integrate the flight articles.	N/A	N/A
<b>Verification:</b>	1. Review summary documentation at MCR.	1. Review summary documentation at MDR.	1. Review summary documentation at PDR.	1. Review summary documentation at CDR.	1. Review summary documentation at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)			<b>Reference:</b>	



**Principle:** All design elements shall be specified and designed to ensure the consistent and compatible use of physical units of measure.

**Rationale:** Critical functions can be misrepresented by errors in unit conversions.

Phase:							
<b>Activities:</b>	1. Determine unit standards.	1. Implement unit standards.	1. Implement unit standards and document as part of requirements management process. 2. All drawings, figures, presentations, and user interfaces shall clearly include units.	1. Implement unit standards and document as part of requirements management process. 2. All drawings, figures, presentations, and user interfaces shall clearly include units.	N/A	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	N/A	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mission Engineering and Systems Analysis Division (590)

**Reference:**

JPL D-17868 rev. 2: 4.11.1.3

1.13








## Performance Demonstration During Qualification Testing

Systems Engineering



**Principle:** During qualification testing, hardware shall demonstrate expected (i.e.: within-tolerance) performance over a range of conditions that envelops the worst-case operating parameters anticipated to occur during the planned operational mission. Testing at all levels (system, sub-system, and component) shall have clearly defined pass/fail criteria.

**Rationale:** Mission success requires demonstration of performance over a range of worst-case operating conditions.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Identify worst-case operating parameters for performance testing. 2. Develop plans for qualification testing that demonstrates performance under worst-case operating parameters.	1. Update plans for qualification testing that demonstrates performance under worst-case operating parameters. 2. Document plans and put under configuration control.	1. Perform qualification testing that demonstrates performance under worst-case operating parameters.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)			<b>Reference:</b>	

1.14








## Mission Critical Telemetry

Systems Engineering



**Principle:** Telemetry coverage shall be acquired during all mission-critical events to assure data is available for critical anomaly investigations.

**Rationale:** Telemetry monitoring aids in anomaly and mishap investigations, so that future problems of a similar nature can be avoided.

Phase:							
<b>Activities:</b>	1. Identify and document potential mission-critical events in concept of operations. 2. Identify and document in concept of operations all potential needs for communications coverage, such as TDRSS or backup ground stations.	1. Update concept of operations. 2. Identify requirements for critical event coverage in ground system design.	1. Address and document coverage of mission critical events in draft of Mission Operations Concept. 2. Address critical event coverage in requirements for ground system design.	1. In Operation Plan, identify telemetry and command coverage for all mission-critical events.	1. Update Operations Plan. 2. Address telemetry coverage of critical events in Operations Procedures.	1. Perform critical events with telemetry capability.	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify at ORR.	1. Verify telemetry capability during mission operations.	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)			<b>Reference:</b>	










1.15

**GSE Use at Launch Site****Systems Engineering**

**Principle:** All testing of operations of flight systems at the launch site or in the field shall only use GSE and test configurations that have been previously used with the flight hardware.

**Rationale:** New testing configurations introduce unknown variables that could possibly cause damage to flight or ground test hardware as well as delays in schedule.

Phase:							
<b>Activities:</b>	N/A	N/A	N/A	1. Identify tests and associated GSE required in the field or at the launch site. 2. Ensure that the GSE required for these tests is used in I&T and is available for use in the field or at the launch site.	1. Draft test plans for launch site verifications and specify all test configurations required. 2. Ensure that these configurations are verified with the flight article and in use before shipping.	N/A	N/A
<b>Verification:</b>	N/A	N/A	N/A	1. Verify at CDR.	1. Verify at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004				<b>Owner:</b> Mission Engineering and Systems Analysis Division (590)		<b>Reference:</b>	

1.16








## Ground Systems Configuration

Systems Engineering



**Principle:** Mission-critical software and hardware under configuration control shall be used when I&T and mission operations are performed.

**Rationale:** Software configuration ensures that ground systems will repeatedly perform as expected, which is critical for spacecraft maneuvers, mission planning, spacecraft monitoring, and science data processing.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Define all configuration items (CIs) needed for ground operations throughout the mission lifecycle, including hardware, software, and documentation.	1. Define configuration control processes, CCB members, and due dates for CIs.	1. Provide CIs to CCB for approval. 2. Populate CI database. 3. Freeze mission-critical software by FOR.	1. Ensure that only approved CIs are used for critical spacecraft operations. 2. Maintain CCB processes for including new CIs.	1. Ensure that only approved CIs are used for disposal. 2. Maintain CCB processes for including new CIs.
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at FOR and ORR.	1. Mission Director and Flight Operations Team verify during operations.	1. Verify at DR.
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Flight Dynamics Analysis Branch (595)			<b>Reference:</b>	

1.17








**Safe Hold Mode**

Observatory Subsystems; GN&amp;C



**Principle:** All spacecraft shall have a power-positive control mode (Safe Hold) to be entered in spacecraft emergencies. Safe Hold Mode shall have the following characteristics: (1) its safety shall not be compromised by the same fault that led to Safe Hold activation; (2) it shall be as simple as practical, employing the minimum hardware set required to maintain a safe attitude; and (3) it shall require minimal ground intervention for safe operation.

**Rationale:** Safe Hold Mode should behave very predictably while minimizing its demands on the rest of the spacecraft. This facilitates the survival, diagnosis, and recovery of the larger system. Complexity typically reduces the robustness of Safe Hold, since it increases the risk of failure due to existing spacecraft faults or unpredictable controller behavior.

Phase:							
<b>Activities:</b>	1. Ensure that requirements document and operations concept include Safe Hold Mode.	1. Ensure that requirements document and operations concept include Safe Hold Mode.	1. Identify hardware & software configuration for Safe Hold Mode. 2. In preliminary FMEA, demonstrate that no single fault can both trigger Safe Hold entry and cause Safe Hold failure. 3. Analyze performance of preliminary Safe Hold algorithms.	1. Establish detailed Safe Hold design including entry/exit criteria and FDAC requirements for flight software. 2. In final FMEA, demonstrate that no single fault can both trigger Safe Hold entry and cause Safe Hold failure. 3. Analyze performance of Safe Hold algorithms. 4. Via a rigorous risk assessment, decide whether or not to test Safe Hold on-orbit.	1. Implement Safe Hold Mode. 2. Verify proper mode transitions, redundancy, and phasing in ground testing. 3. Execute recovery procedures during mission simulations. 4. Perform on-orbit testing if applicable.	N/A	N/A
<b>Verification:</b>	1. Verify through peer review and at MCR.	1. Verify through peer review and at MDR.	1. Verify through peer review and at PDR.	1. Verify through peer review and at CDR.	1. Verify at PER and FOR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

GN&amp;C Systems Engineering Branch (591)

**Reference:**

Code 590 Policy

1.19








## Initial Thruster Firing Limitations

Observatory Subsystems; GN&amp;C



**Principle:** All initial thruster firings shall occur with real-time telemetry and command capability. If alternate actuators (e.g. reaction wheels) are present, the momentum induced by initial firings shall be within the alternate actuators' capability to execute safe recovery of the spacecraft.

**Rationale:** Polarity issues and thruster underperformance typically occur early in the mission. Both conditions can result in a spacecraft emergency due to excessive spacecraft spin rates.

Phase:							
<b>Activities:</b>	1. The Attitude Control System (ACS) Concept shall ensure that thrusters will not be required during launch vehicle separation for a 3-sigma distribution of cases. The concept for operations shall ensure that, except in case of emergency, all thrusters can be test-fired on-orbit prior to the first delta-v maneuver.	1. The Attitude Control System shall design the thruster electronics, size and place the thrusters, and size other actuators (e.g. reaction wheels) such that a failed thruster can be shut down and the momentum absorbed before power or thermal constraints are violated. The activities specified in Pre-Phase A shall be maintained.	1. Hardware (processors, power interfaces, data interfaces, etc.) and software shall ensure that anomalous thruster firings will be shut down quickly enough to allow recovery of the spacecraft to a power-safe and thermal-safe condition. 2. Develop design and operations concept consistent with the activities established in Pre-Phase-A.	1. Establish detailed recovery procedures. Finalize design and operations concept consistent with the activities established in Pre-Phase-A.	1. Test failed thruster conditions with the greatest possible fidelity. Verify transitions and polarity. 2. Ensure that recovery procedures have been simulated with the flight operations team. 3. During on-orbit testing, thrusters shall be test fired to verify polarity and performance prior to being used in a closed loop control.	1. Ground contact shall be maintained during thruster firings.	1. Maintain activity per Phase E. 2. Document any lessons learned.
<b>Verification:</b>	1. GN&C and system engineering organizations shall verify at MCR.	1. GN&C and system engineering organizations shall verify at MDR.	1. GN&C and system engineering organizations shall verify at PDR.	1. GN&C and system engineering organizations shall verify at CDR.	1. GN&C and system engineering organizations shall verify at SAR. 2. Follow-up at Operational Readiness Review (ORR).	1. Document lessons learned.	1. GN&C and system engineering organizations shall verify at DR. 2. GN&C and system engineering organizations document lessons learned.

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Flight Dynamics Analysis Branch (595)








**Reference:**

1.20

**Manifold Joints of Hazardous Propellants****GN&C; Propulsion**

**Principle:** All joints in the propellant manifold between the propellant supply tank and the first isolation valve shall be NDE-verified welds.

**Rationale:** Failure of manifold joint poses critical or catastrophic threat to personnel and/or facility.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Confirm system requirements for welded manifold joints.	1. Present weld & technician certification plans and NDE plans.	1. Certify integrity of welds by NDE.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Propulsion Branch (597)			<b>Reference:</b>	

1.21








**Overpressurization Protection in Liquid Propulsion Systems**

GN&amp;C; Propulsion



**Principle:** The propulsion system design and operations shall preclude damage due to pressure surges ("water hammer"). (Note: See also "Unintended Propellant Vapor Ignition.")

**Rationale:** Pressure surges could result in damage to components or manifolds, leading to failure of the propulsion system, damage to facilities, and/or safety risk to personnel.








Phase:							
<b>Activities:</b>	N/A	N/A	1. Perform pressure surge analysis, based on worst-case operating conditions, to determine maximum surge pressure. 2. If maximum surge pressure is greater than system proof pressure, incorporate design features to reduce surge pressure below proof pressure.	1. Demonstrate by test that maximum surge pressure is less than system proof pressure. 2. Demonstrate by test that surge-suppression features (if applicable) do not lead to violation of flowrate/pressure drop requirements. 3. Demonstrate by analysis that flight SW and/or on-orbit procedures will prevent operation of propulsion system beyond conditions assumed in pressure surge analyses and tests.	N/A	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	N/A	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Propulsion Branch (597)			<b>Reference:</b>	

1.22

**Purging of Residual Test Fluids****GN&C; Propulsion**

**Principle:** Propulsion system design and the assembly & test plans shall preclude entrapment of test fluids that are reactive with wetted material or propellant.

**Rationale:** Residual test fluids can be reactive with the propellant or corrosive to materials in the system leading to critical or catastrophic failure.

Phase:							
<b>Activities:</b>	N/A	N/A	1. If test fluids are used in the assembled system, present plans for purging & drying of system.	1. Demonstrate by test the effectiveness of method to purge & dry wetted manifold.	1. Verify dryness of wetted system by test.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Propulsion Branch (597)			<b>Reference:</b>	

1.24








## Propulsion System Safety Electrical Disconnect

GN&amp;C; Propulsion



**Principle:** An electrical disconnect "plug" or set of restrictive commands shall be provided to preclude inadvertant operation of components.

**Rationale:** Unplanned operation of propulsion system components (e.g. 'dry' cycling of valve; heating of catalyst bed in air; firing of thrusters after loading propellant) can result in injury to personnel or damage to components.








Phase:							
<b>Activities:</b>	N/A	N/A	1. Present design and/or operational plan that preclude unplanned operation of propulsion system components.	1. Present detailed design of electrical disconnect and/or set of restrictive commands to preclude unplanned operation of propulsion system components.	1. Demonstrate the effectiveness of the disconnect and/or set of restrictive commands by test.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Propulsion Branch (597)			<b>Reference:</b>	





**Principle:** All inhibits used to control safety hazards shall be independent and verified under operational control.

**Rationale:** Propagation of failure in safety inhibits can result in critical or catastrophic threats to personnel, facility, and hardware.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Identify proposed design inhibits that preclude hazardous condition and document in preliminary hazard analysis.	1. Demonstrate by analysis or component test that 1) failure in selected inhibit will not cause failure of the other inhibits, or 2) that no single event or software command can open multiple inhibits.	1. Demonstrate by analysis or component test that 1) failure in selected inhibit will not cause failure of the other inhibits, or 2) that no single event or software command can open multiple inhibits.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER or PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> System Reliability and Safety Office (302)			<b>Reference:</b>	

1.27








**Propulsion System Overtemp Fuse**

GN&amp;C; Propulsion



**Principle:** Flight fuses for wetted propulsion system components shall be selected such that overheating of propellant will not occur at the maximum current limit rating of the flight fuse. (Note: See also rule 2.06 "System Fusing Architecture.")

**Rationale:** Propulsion components such as pressure transducers normally draw very low current, and therefore their fuses are usually oversized. In such cases it may be possible for a malfunctioning component to overheat significantly without exceeding the rating of the fuse. Exceeding temperature limits of propellant can result in mission failure or critical/catastrophic hazard to personnel and facility.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Present fusing plan for wetted propulsion system components.	1. Demonstrate by analysis that wetted components will not exceed maximum allowable temperature of propellant at the maximum current limit rating for the flight fuse.	1. Verify by inspection of QA records that the correct flight fuse has been installed.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER or PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Propulsion Branch (597)








**Reference:**

1.28

**Unintended Propellant Vapor Ignition****GN&C; Propulsion**

**Principle:** Propulsion system design and operations shall preclude ignition of propellants in the feed system.








**Rationale:** Ignition of propellant vapor can occur due to a variety of conditions including (1) mixing of fuel and oxidizer in pressurant manifolds via diffusion and condensation; (2) pyrotechnic valve initiator products entering propellant manifolds; (3) adiabatic compression of gas due to pressure surges, i.e. "water hammer" effects. These conditions can cause hardware damage and/or mission failure.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Present design analysis, including pyrovalve firing sequence and/or propellant line initial pressurization, supporting mitigation of conditons for ignition of propellant vapors. 2. For bipropellant systems, demonstrate by analysis that the design provides adequate margin against diffusion and condensation of propellant vapors in common manifolds.	1. Demonstrate by analysis or test that pyrovalve firing sequence and/or propellant line initial pressurization plan will not promote conditions for ignition of propellant vapor. 2. For bipropellant systems, demonstrate by test that selected pressurant system components exhibit vapor diffusion resistance per the Phase B analysis.	N/A	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.		N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Propulsion Branch (597)			<b>Reference:</b>	



**Principle:** Controller designs shall meet or exceed minimum gain and phase margin requirements as specified below.

**Rationale:** Proper gain and phase margins are required to maintain stability during reasonable unforeseen changes in spacecraft configuration.

Phase:							
<b>Activities:</b>	1. The Attitude Control System (ACS) Concept shall identify if the gain and phase margin requirements will be difficult to meet due to the spacecraft configuration.	1. Update the ACS concept and identify if the gain and phase margin requirements will be difficult to meet due to the spacecraft configuration.	1. The ACS shall design the controller rigid body gain and phase margin to meet the requirement of 12 db and 30 degrees respectively.	1. The ACS shall design the controller flexible body gain and phase margin to meet the requirements of 6 db and 30 degrees respectively. Use Gain attenuation methods only. Phase attenuation methods should not be used.	N/A	N/A	N/A
<b>Verification:</b>	GN&C and system engineering organizations shall verify at MCR.	1. 1. GN&C and system engineering organizations shall verify at MDR.	GN&C and system engineering organizations shall verify at PDR.	GN&C and system engineering organizations shall verify at CDR.	N/A	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Flight Dynamics Analysis Branch (595)			<b>Reference:</b> ACS Handbook	

1.31








**Actuator Sizing Margins**

Observatory Subsystems; GN&amp;C



**Principle:** The Attitude Control System (ACS) actuator sizing shall reflect specified allowances for mass properties growth.

**Rationale:** Knowledge of spacecraft mass and inertia can be very uncertain at early design stages, so actuator sizing should be done with the appropriate amount of margin to ensure a viable design.

Phase:							
<b>Activities:</b>	N/A	1. ACS actuators (including propulsion) shall be sized for the current best estimate of spacecraft mass properties with 100% design margin.	1. ACS actuators (including propulsion) shall be sized for the current best estimate of spacecraft mass properties with 50% design margin.	1. ACS actuators (including propulsion) shall be sized for the current best estimate of spacecraft mass properties with 25% design margin.	N/A	N/A	N/A
<b>Verification:</b>	N/A	1. At MDR, GN&C and system engineering organizations shall verify.	1. At PDR, GN&C and system engineering organizations shall verify.	1. At CDR, GN&C and system engineering organizations shall verify.	N/A	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Flight Dynamics Analysis Branch (595)			<b>Reference:</b>	

1.32








## Thruster and Venting Impingement

Systems Engineering



**Principle:** Thruster or external venting plume impingement shall be analyzed and demonstrated to meet mission requirements.

**Rationale:** Impingement is likely to contaminate critical surfaces and degrade material properties. It can also create adverse and unpredictable S/C torques and unacceptable localized heating.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Develop analytical mass transport model. 2. Update as design evolves.	1. Refine analysis based on updated designs.	1. Refine analysis based on updated designs. 2. Measure venting rates during T/V tests and verify analysis.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Engineering and Systems Analysis Division (590)

**Reference:**

JPL D-17868 rev. 2: 2.4.2.2.6

1.33








## Polarity Checks of Critical Components

Observatory Subsystems



**Principle:** All hardware shall verified by test or inspection of the proper polarity, orientation, and position of all components (sensors, switches, and mechanisms) for which these parameters affects performance.

**Rationale:** Each spacecraft and instrument contains many components that can be reversed easily during installation. Unless close inspections are performed, and proper installations are verified by test, on-orbit failures can occur when these components are activated.

Phase:							
<b>Activities:</b>	N/A	<ol style="list-style-type: none"> <li>1. Identify all polarity-dependent components in the spacecraft design concept.</li> <li>2. Ensure that design concept provides capability for testing functionality of polarity-dependent components at end-to-end mission system level, in addition to subsystem level.</li> </ol>	<ol style="list-style-type: none"> <li>1. Identify all polarity-dependent components in the spacecraft preliminary design.</li> <li>2. Ensure that preliminary design provides capability for testing functionality of polarity-dependent components at end-to-end mission system level, in addition to subsystem level.</li> <li>3. Develop test plan for polarity-dependent components.</li> </ol>	<ol style="list-style-type: none"> <li>1. Identify all polarity-dependent components in the spacecraft detailed design.</li> <li>2. Ensure that detailed design provides capability for testing functionality of polarity-dependent components at end-to-end mission system level, in addition to subsystem level.</li> <li>3. Develop test procedures for polarity-dependent components.</li> </ol>	<ol style="list-style-type: none"> <li>1. Execute polarity tests at subsystem and end-to-end mission system levels.</li> </ol>	N/A	N/A
<b>Verification:</b>	N/A	<ol style="list-style-type: none"> <li>1. Verify through peer review and at MDR.</li> </ol>	<ol style="list-style-type: none"> <li>1. Verify through peer review and at PDR.</li> </ol>	<ol style="list-style-type: none"> <li>1. Verify through peer review and at CDR.</li> </ol>	<ol style="list-style-type: none"> <li>1. Verify through peer review, at PER, and at PSR.</li> </ol>	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> GN&C Systems Engineering Branch (591)			<b>Reference:</b>	

1.34








## Closeout Photo Documentation of Key Assemblies

Systems Engineering



**Principle:** Projects shall produce closeout photographic documentation of key assemblies during the manufacturing process and of the final integrated configuration "as flown."

**Rationale:** Closeout photographic documentation provides an essential record in the event of mishaps or anomalies.

Phase:							
<b>Activities:</b>	N/A	1. Identify plan to capture closeout photographic documentation of key assemblies.	1. Update plan to capture closeout photographic documentation of key assemblies.	1. Implement plan to capture closeout photographic documentation of key assemblies.	1. Provide closeout photographic documentation of key assemblies.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PSR	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Independent Technical Authority (170)			<b>Reference:</b>	



2.01








## Flight Electronic Hardware Operating Time

Electrical



**Principle:** One thousand (1000) hours of operating/power-on time shall be accumulated on all flight electronic hardware (including all redundant hardware) prior to launch, of which at least 200 hours shall be in vacuum. The last 350 hours of operating/power-on time shall be failure-free.

**Rationale:** Accumulated power-on time that demonstrates trouble-free parts performance helps reduce the risk of failures after launch.

Phase:							
<b>Activities:</b>	N/A	N/A	N/A	N/A	1. Conduct 1000 hours of testing of all flight hardware and spares. The last 350 hours shall be trouble-free. At least 200 shall be in vacuum.	N/A	N/A
<b>Verification:</b>	N/A	N/A	N/A	N/A	1. Verify at PSR that testing has been conducted.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Office of Systems Safety and Mission Assurance (300)

**Reference:**

GEVS 2.3.4

2.02








## EEE Parts Program for Flight Missions

Electrical



**Principle:** A EEE parts program shall be planned for and implemented for all flight missions for the purpose of part selection, de-rating, screening, and overall qualifications.

**Rationale:** Lack of comprehensive parts program may lead to parts shortages or design impacts due to unexpected long lead times or qualification status of the parts.

Phase:							
<b>Activities:</b>	1. Address parts program and acquisition strategy for critical long lead parts in concept study.	1. Define preliminary parts plan.	1. Identify parts acquisition plan for long lead parts.	1. Prepare a detailed list of critical part(s) (including spares) and qualification plan(s).	1. Track critical parts and prepare specific risk mitigation plan(s).	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify at MRR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Electrical Engineering Division (560)

**Reference:**

2.03








## Radiation Hardness Assurance Program

Electrical



**Principle:** A Radiation Hardness Assurance (RHA) Program shall be planned for and implemented for all flight missions to verify component- and system-level radiation hardness by CDR.

**Rationale:** Projects that ignore or underfund this discipline often discover too late that instruments/spacecraft are susceptible to radiation effects.

Phase:							
<b>Activities:</b>	1. Include a preliminary RHA assessment in the concept study.	1. Update RHA assessment, and include resources for RHA program support in proposal.	1. Complete radiation environment analysis and assess radiation sensitivity of parts through test databases or by testing.	1. Implement radiation hardness requirements for part selection. 2. Identify mitigation plans for non-compliance. 3. Complete parts acceptability categorization. 4. Complete parts RHA qualification.	1. Implement mitigation plans. 2. Complete radiation test reports.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify through peer review prior to start of manufacturing and at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Electrical Engineering Division (560)			<b>Reference:</b>	

## 2.04








## Dedicated Hardware ETU and EGSE

Electrical; Systems Engineering



**Principle:** All new developments with TRL 5 or lower at Pre-Phase A shall have a dedicated hardware ETU & EGSE.

**Rationale:** A hardware ETU & EGSE helps reduce risk to mission performance and project execution by reducing scheduling conflicts and identifying potential problems early in a mission's lifecycle.

Phase:							
<b>Activities:</b>	1. Identify items at TRL levels 5 or lower and define plans for ETU and EGSE.	1. Address needed resources for dedicated ETU and EGSE.	1. Begin implementation of ETU and EGSE. 2. Develop preliminary development schedule.	1. Prepare detailed development schedule utilizing dedicated ETU. 2. Build and test ETU and EGSE.	N/A	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MRR.	1. Verify at PDR.	1. Verify at CDR.	N/A	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Electrical Engineering Division (560)

**Reference:**

2.05








## System Grounding Architecture

Electrical



**Principle:** A system grounding concept shall be developed for all missions.

**Rationale:** Poor system grounding design will lead to grounding incompatibility between different systems during the integration phase, with potential degradation of end-to-end functional performance, especially for magnetic sensitive missions.

Phase:							
<b>Activities:</b>	1. Identify a preliminary grounding concept.	1. Complete a preliminary grounding design and communicate it to all hardware developers.	1. State grounding requirements in all Electrical ICDs for the users.	1. Prepare a detailed System Grounding Document. 2. Implement the design.	1. Oversee implementation of the design. 2. Demonstrate safety, compatibility, and system performance.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify through peer review and at PDR.	1. Verify through peer review and at CDR.	1. Verify through peer review prior to TRR and at PER.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Electrical Engineering Division (560)

**Reference:**

2.06








## System Fusing Architecture

Electrical



**Principle:** A system fusing architecture shall be developed for all missions, including the payloads. (See also 1.27 "Propulsion System Overtemp Fuse.")

**Rationale:** Lack of a system fusing design may lead to fuse incompatibilities between the power source and the payloads, which could lead to the power source fuse being blown prior to the payloads. The system fusing design should maximize the reliability of the system.

Phase:							
<b>Activities:</b>	N/A	1. Identify a preliminary system fusing architecture for the mission and communicate with all hardware developers.	1. Develop system fusing requirements for the mission and state requirements in all Electrical ICDs for the users, including transient requirements.	1. Prepare a detailed System Fusing Document.	1. Oversee correct implementation of design by all users.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify through peer review and at MDR.	1. Verify all system fusing requirements (including the payloads) through peer review and at PDR.	1. Verify user implementation at electrical systems peer review and at CDR.	1. Verify that design verification includes fusing design prior to TRR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Electrical Engineering Division (560)

**Reference:**

2.07








**End-to-End Test of Release Mechanism for Flight Deployables**

Electrical



**Principle:** A release mechanism test for the flight deployable components shall be performed as an end-to-end system-level test under worse-case conditions and a realistic timeline.

**Rationale:** Often when EGSE is used for mechanism release during I&T, potential system design problems with the release mechanisms are not detected until after the completion of the environmental program. Redesigning late in the program has many technical implications and significant cost/schedule impact.

Phase:							
<b>Activities:</b>	N/A	1. Develop preliminary environmental test plan (with reference to end-to-end aspect of the test program).	1. Develop final environmental test plan including the end-to-end system level test and present at Peer Review.	1. Develop test procedures for the end-to-end system level test and present at Peer Review.	1. Present detailed test configuration at PER.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify at MDR.	1. Verify through peer review and at SDR and PDR.	1. Verify at CDR.	1. Verify at PER that spacecraft circuits will be used during tests.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Office of Systems Safety and Mission Assurance (300)			<b>Reference:</b> GEVS 2.6.2.4.b	

2.09








## Spectrum Allocation Considerations

Electrical



**Principle:** National spectrum paperwork shall be developed for all new GSFC missions, as well as analysis of mission compliance with national and international spectrum regulations and recommendations. This will include the determination of what specific carrier frequencies should be recommended for these missions to minimize potential interference.

**Rationale:** NASA requires that all operating missions be in accordance with national allocations, service requirements, and authorizations, and that its satellite systems be protected against unacceptable interference from other satellite systems.

Phase:							
<b>Activities:</b>	N/A	1. Begin work with mission to determine spectrum requirements and inform mission as to what frequency bands are available and what regulations must be met (e.g., PFD limits, OOB emissions limits).	1. Continue consultations with project, including evaluating mission design changes based on requirement to comply with national and international spectrum regulations.	1. Confirm compliance with applicable national and international regulations. 2. Determine optimal frequency within desired band, based on search of GMF and ITU databases and interference analysis. 3. If there is non-compliance, inform project and recommend changes to bring mission into compliance. If an acceptable frequency cannot be found, recommend appropriate systems modifications.	1. Validate compliance with applicable national and international regulations by performing end-to-end compatibility test.	1. If mission experiences interference while in orbit, investigate cause and recommend appropriate technical and/or regulatory remedies.	1. If mission will be operational past originally authorized date, file appropriate paperwork to ensure extension is granted.
<b>Verification:</b>	N/A	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER and PSR.		
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Applied Engineering and Technology Directorate (500)			<b>Reference:</b>	



## 2.10








## Electronic Design for Flight Missions

## Electrical



**Principle:** All flight mission electronics design and development shall comply with the GSFC Electronics Design and Development Guidelines 500-PG-8700.2.2.

**Rationale:** Applying a structured approach to the planning, execution and validation phases of a flight electronics product mitigates the risk of budget and schedule overruns, and incorporates the use of good engineering practices.

Phase:							
<b>Activities:</b>	1. Identify mission requirements and formulate a preliminary electrical conceptual design.	1. Collect all applicable design inputs into a requirements document. 2. Generate design planning documentation. 3. Finalize conceptual design.	1. Perform detailed design. 2. Demonstrate high risk areas through the use of breadboards, analysis and/or simulations. 3. Conduct design trade studies.	1. Build design verification platform such as an ETU, testbed, etc. 2. Demonstrate the design meets mission requirements.	1. Fabricate and assemble flight hardware. 2. Validate performance via the environmental test program. 3. Document all results properly. 4. Certify all requirements have been met.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at SRR and MCR.	1. Verify through peer review and at PDR.	1. Verify through peer review and at CDR.	1. Verify through peer review and at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Electrical Engineering Division (560)			<b>Reference:</b> 500-PG-8700.2.2	

2.11








## EMI/EMC Design for Flight Missions

Electrical



**Principle:** All flight mission systems/subsystems shall comply with EMI/EMC requirements in GEVS Section 2.5.

**Rationale:** Applying a structured EMI approach to the planning, execution and validation phases of a flight electronics product mitigates the risk of budget and schedule overruns, and incorporates the use of good engineering practices.

Phase:							
<b>Activities:</b>	1. Assess potential for EMI/EMC concerns.	1. Identify system/subsystem components and their interfaces relative to EMI/EMC concerns. 2. Categorize system components according to known or expected noise magnitude and frequencies.	1. Using detailed electrical design, identify potential noise sources and victims as well as coupling mechanisms. 2. Perform analysis and simulations as required to assess and optimize system configuration. 3. Generate design guidelines for system and subsystems, including grounding and shielding philosophy. 4. Customize EMC test levels and configuration and publish as the EMC Test Plan.	1. Using subsystem ETU's and Test Beds, Confirm by measurement the high risk source-victim noise coupling levels. 2. Implement corrective measures as needed. 3. Verify effectiveness of corrective measures. 4. Identify mitigation strategies applicable to the flight hardware.	1. EMI Test Facility generates the EMI Test Procedure. 2. Using flight hardware, conduct environmental EMI tests to validate performance against the EMC Test Plan requirements. 3. Evaluate EMI Test Results Report for EMI compliance.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at SRR and MCR.	1. Verify through peer reviews and at PDR.	1. Verify through peer reviews and at CDR.	1. Verify through peer reviews and at PER and PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Electrical Engineering Division (560)

**Reference:**

GEVS 2.5

## 2.12








## Printed Circuit Board Coupon Analysis

Electrical



**Principle:** All flight printed circuit boards (PCBs) shall be verified by coupon testing.

**Rationale:** Verifying the integrity of printed circuit boards reduces the risk of an on-orbit board failure, and saves the added cost of replacing flight-qualified components and reassembly if board failure occurs during qualification testing.

Phase:							
<b>Activities:</b>	1. Provide within the conceptual study the electronic requirements that will drive mission cost, schedule, and design.	1. Update electronic requirements. 2. Include coupon verification of flight boards in mission cost and schedule estimates.	1. Update coupon evaluation requirements.	1. Finalize required PCBs.	1. Submit coupons for analysis.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify results of all coupon testing at PER.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Electrical Engineering Division (560)

**Reference:**

300-PG-7120.2.2B

## 2.13








## Electrical Connector Mating

Electrical



**Principle:** Mating of all flight connectors which can not be verified via ground tests, shall be clearly labeled and keyed uniquely, and mating of them shall be verified visually to prevent incorrect mating.

**Rationale:** Error in mating of interchangeable connectors can result in mission degradation or failure.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Identify operations that cannot be tested on the ground.	1. Present plans to prevent error in mating of electrical connectors.	1. Verify by inspection & photo documentation that electrical connectors are mated correctly.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Electrical Engineering Division (560)			<b>Reference:</b>	

3.01








## Verification and Validation Program for Mission Software Systems

Software



**Principle:** A thorough verification and validation process shall be applied to all mission software systems. This process shall trace customer/mission operations concepts and science requirements to implementation requirements and system design, and shall include requirements based testing of all mission elements, and end-to-end system operations scenario testing.

**Rationale:** Mission software, especially flight software, must be tested thoroughly to ensure a successful mission/project.

Phase:							
<b>Activities:</b>	1. Develop first version of Operations Concept with customer. 2. Document SW functionality at high level. 3. Document SW verification and validation approach 4. Document cost estimate for overall SW design	1. Update Ops Concept. 2. Identify test tools to be used for software testing (fidelity, quantity). 3. Update verification and validation approach and associated cost and schedule based on updated requirements.	1. Draft Software Test Plan 2. Draft SW traceability matrix showing SW requirements traced to parent requirements and to software components.	1. Complete SW test plan. 2. Identify verification and validation program risks. 3. Update SW traceability matrix	1. Develop detailed test scenarios/cases. 2. Complete traceability of requirements to SW design and SW test program. 3. Execute SW test plan.	N/A	N/A
<b>Verification:</b>	1. Verify by inspection through peer review and at MCR.	1. Review by analysis the verification and validation approach for the mission through peer review and at MDR.	1. Verify software development and test program by analysis through peer review. 2. Verify that budget and schedule accommodate regression and end-to-end mission testing at SDR and PDR.	1. Verify by analysis at software PDR.	1. Verify by analysis at software CDR and Test Readiness Review.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Systems Integration and Engineering Branch (581)			<b>Reference:</b> GPG 8700.5	

## 3.03








## High Fidelity Interface Simulation Capabilities

## Software



**Principle:** A software simulation capability shall be provided for each external interface to FSW. Both nominal and anomalous data inputs to FSW shall be configurable in real-time using the procedure language of the FSW test workstation.

**Rationale:** When adequate simulation capabilities aren't planned, there is severe impact to FSW development/maintenance productivity and funds.

Phase:							
<b>Activities:</b>	N/A	1. Describe functional and performance capabilities for each flight processor external interface in technical proposal. 2. Include cost estimate.	1. Update description of required simulation capabilities to reflect any changes in requirements since previous phase. 2. Document acquisition strategy for acquiring simulation capabilities, including responsible organizations.	1. Update requirements to reflect any changes since previous phase. 2. Deliver flight software external interface test tools to FSW team.	1. Maintain FSW external interface test tools.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify by observation at MDR.	1. Verify by observ. at SW SRR. 2. Verify flight sim. capabil. defined to accommod. test of all FSW data I/O, FSW modes, nominal & anomalous conditions & load/stress tests for each flight CPU. 3. Verify sim. develop. & FSW schedules consistent.	1. Verify by observation at software CDR.	1. Verify by observation at MOR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Flight Software Branch (582)			<b>Reference:</b>	

## 3.04








## T&amp;C System Selection Trade Study for Operations Ground System

## Mission Operations



**Principle:** An engineering trade analysis shall be performed on the selection of the flight operations telemetry and command (T&C) system. This analysis shall define the benefits, costs, and risks associated with each candidate system. The trade shall explicitly address potential reuse of the I&T T&C system, as well as the use of government-provided versus commercial systems.

**Rationale:** The selection of the flight operations T&C system is one of the most important decisions made by the ground system implementation team. There are several systems available that generally could meet the ground system requirements, but each will provide its own benefits and drawbacks. A thorough engineering trade analysis will help ensure the best system is selected for the mission.

Phase:							
<b>Activities:</b>	1. Begin early stages of the trade study to evaluate the candidate systems. The study should identify the factors and characteristics of the mission that will have the greatest influence on the trade.	1. Update trade study. At minimum, trade shall address potential reuse of I&T products in ops, approach for developing & validating ops products (e.g., procedures & data-bases), configuration and maintenance costs, history of candidate systems providing ops support, & potential to use ops system for I&T. 2. For in-house missions, trade study shall also assess impacts to FSW develop./test & I&T if ops T&C sys. different than default FSW & I&T system.	1. Complete the trade study. 2. Make a decision on operations T&C system. This is needed to provide a reference architecture within which ground system requirements are defined and cost estimates are solidified.	N/A	N/A	N/A	N/A
<b>Verification:</b>	1. Verify at MCR that trade is adequate.	1. Verify at MDR that trade addresses above and other appropriate items.	1. Verify at PDR that the trade study is completed and demonstrates a thorough analysis that justifies the decision .	N/A	N/A	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Systems Integration and Engineering Branch (581)

**Reference:**

3.05








## Flight / Ground System Test Capabilities

Ground System; Mission Operations



**Principle:** Flight system interface and functional capabilities shall be provided to support ground system development and test, and flight operations development, test and training. These capabilities shall be provided via a combination of one or more spacecraft simulators and the actual spacecraft. The spacecraft capabilities, access time, and schedule required to support ground system/operations development and test shall be defined by and negotiated with the ground system and operations teams.

**Rationale:** The ground system must be compatible with the S/C it is being designed to support, and this must be proven prior to launch via tests. Similarly, the ops team must be able to develop and validate a variety of operations products, such as procedures, databases, display pages, and launch scripts. The ops team must also have opportunities to learn about operating the S/C and prove this knowledge has been acquired prior to launch.

Phase:							
<b>Activities:</b>	1. Develop plans for providing the flight system interfaces for use by the ground system and flight operations teams.	1. Develop preliminary simulation concepts.	1. Generate preliminary simulator requirements and identify long lead procurement items. 2. Incorporate the agreements on simulator and spacecraft access time into the I&T schedule.	1. Complete simulator requirements, design, and delivery plan/schedules. 2. Ensure simulator and spacecraft access times are integrated into the detailed I&T schedule.	1. Provide simulator and S/C hardware access for both ground system verification and validation, and for ops teams to prepare for launch. 2. Ensure S/C and instrument design changes are accommodated by simulator updates as appropriate. 3. Ensure plan & budget are in place to maintain simulators post-launch.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at PDR.	1. Verify at CDR.	1. Verify at MOR that plan for simulator use is described. 2. Verify at FOR that plan and schedule for simulator maintenance is in place.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Systems Integration and Engineering Branch (581)

**Reference:**



## 3.06








## Dedicated ETU for Flight Software (FSW) Testing

## Software



**Principle:** An ETU flight data system testbed shall be dedicated to FSW teams specifically for FSW development and test. Such ETUs are supplemented by external interface simulators as specified in Rule 3.03. Hardware and I&T teams shall not plan to use the FSW ETUs for their critical path schedule. The number of flight data system testbed units shall be sufficient to support the FSW development schedule and the overall mission schedule.

**Rationale:** Early investment in dedicated FSW testbed hardware fidelity saves costs and avoids significant schedule risks to FSW and I&T teams. Anything less than a dedicated ETU will add to mission risk and threaten cost/schedule.

Phase:							
<b>Activities:</b>	N/A	1. Define high-level ETU requirements for FSW with clear and detailed rationale.	1. Update ETU requirements from Phase A. 2. FSW team ensure that ETU development and delivery schedule is consistent with FSW development team need dates. 3. FSW team develop ETU acceptance criteria for ETU deliveries.	1. Review ETU design. 2. Review ETU delivery schedule.	1. FSW team verify availability of ETUs to meet FSW development and test schedules. 2. FSW team lead accept ETU deliveries and verify functionality.	1. FSW team review and provide inputs on ETU maintenance plan.	N/A
<b>Verification:</b>	N/A	1. Verify by observation at MDR that ETU quality FSW test beds are clearly represented in the technical proposal, and that costs for dedicated FSW testbed ETUs are included in the electronics cost proposal.	1. Verify by observ. at SDR & SW SRR that 1) FSW ETU testbed (s) represent maturing flight architecture; 2) min. 1 test bed w/ full ETU fidelity costed & deliv. sched. consis. w/ FSW needs; 3) I&T plans minimize sharing ETU, or dedicated ETU provided.	1. Verify by observation at SW PDR that 1) deliv. plans for ETU-quality FSW testbed(s) consistent w/ FSW develop. needs; 2) I&T plans require minimal use of a shared ETU, or I&T have own dedicated ETU.	1. Verify by observ. at SW CDR that 1) ETU-quality FSW testbed(s) have been delivered to FSW team; 2) ETU FSW testbed confirmed adequate by FSW staff for on-orbit maintenance and ops. support.	1. Verify by observ. at FOR that 1) FSW ETU testbeds have been moved to their long-term environ. for FSW maint. & ops support; 2) Sys. Admins, facility and hardware support are in place.	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Flight Software Branch (582)			<b>Reference:</b>	

3.07








## Flight Software Margin Warnings

Software



**Principle:** Flight software development teams shall adhere to the resource margins specified in Table 3.07-1.

**Rationale:** Early and repeated attention by flight software teams to resource utilization will improve resource margins for future phases of the mission.

Phase:							
<b>Activities:</b>	N/A	1. Establish clear rationale for FSW resource estimates using the proposed hardware.	1. Update software margins based on updated requirements 2. Coordinate with S/C and instrument procurement and hardware development teams to ensure margins can be maintained.	1. Design FSW within defined design margins. 2. Continue coordination with S/C and instrument hardware development teams.	1. Track development to design margins. 2. Report systems not able to maintain margins. 3. Provide mitigation plans or work-arounds for margins that are not being maintained.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify by observation at MDR.	1. Verify by observation at SDR and FSW SRR.	1. Verify by observation at Mission CDR and FSW PDR.	1. Verify by observation at FSW CDR and PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Flight Software Branch (582)			<b>Reference:</b>	

**Table 3.07-1 Resource Margins for Flight Software Development**

The numbers in the table below are margins for different mission phases and maturity levels. These do not represent hard limits, but levels where the software development team should start to get concerned. Project waivers are not required unless the resource starvation means the system can't meet one of its requirements.

Margin is calculated using the formula: (available resource – estimated usage of resource) / available resource.

Mission Phase	FSW SRR	FSW PDR	FSW CDR	Ship/Flight
Method	Estimate	Analysis	Analysis/ Measured	Measured
Average CPU	50%	50%	40%	30%
CPU Deadlines	50%	50%	40%	30%
PROM	50%	30%	20%	0%
EEPROM	50%	50%	40%	30%
RAM	50%	50%	40%	30%
PCI Bus	75%	70%	60%	50%
1553 Bus	30%	25%	20%	10%
Spacewire (1355	TBD	TBD	TBD	TBD
UART/Serial I/F	50%	50%	40%	30%

**3.07-1 Flight Software Margin Table**

Selecting which column to use at a particular time is not always obvious. Generally, one should pay more attention to the “Method” row than the “Mission Phase” row. For example, if there is a lot of re-use and you have actual measured code sizes for most modules, your PROM could be 80% full at PDR without causing concern. Different resource elements can be at different maturity levels at any given point in a project. The rightmost column should only be used when the code is fully integrated and tested. Those are the margins we want to save for in-flight maintenance.

**Average CPU Utilization:** This should be estimated/measured over about a five second interval under the worst-case normal operating conditions. The numbers represent the percentage of time the CPU is doing non-background processing work. Background processing may include tasks such as memory scrubbing or table check summing if those tasks have very loose timing requirements.

**Deadlines:** This is the fine-scale companion to the row above. This row usually represents the interrupt timing requirements of the system. For example: How quickly does the processor need to re-fill that FIFO after the HW interrupt is asserted? If you have a 50ms deadline for an ISR and you estimate the processor can meet it in 20ms, your usage(margin) is 40%(150%). If that same ISR occurs twice per second, it would only add 4% to the CPU usage calculation. All deadlines in the system should be considered, and compared individually to the recommended margin. Also, consider which deadlines can occur simultaneously to calculate the worst-case timing.

PROM is non-volatile memory that cannot be modified in flight.

EEPROM is non-volatile memory that can be modified in flight.

RAM is volatile memory where the executing code and data are stored. This memory is always on the processor's local bus.

Note: Bulk memory used for storage of housekeeping and science data has been removed from this table. The amount of bulk memory is driven more by mission parameters (data rates, number of ground contacts, etc) than software design. So, systems engineers should track the bulk memory margin. However, some systems have the "bulk" memory on the processor card, indistinguishable from regular RAM. In this case, the software team should track margins on this combined RAM/bulk memory space.

**1553 Bus:** Usage calculations should include 1 retry for each transaction, unless mission requirements specify otherwise. If the scheduling of bus traffic is segmented into slots or channels, the usage should be calculated based on the number of slots used (rather than actual bus time).

**Spacewire:** Under development.

Other Data Busses: For busses and interfaces not listed, try to select the one that is closest in behavior among the listed busses. If none is even close, work with your systems engineer to define acceptable margins for that unique bus. Then, we can add that new bus to the table.

3.09








## Software Development Approach

Software



**Principle:** Acquisition and development of software shall be performed in accordance with the requirements of NPR 7150.2. GSFC in-house developments shall use practices documented in GSFC GPG-8700.5 and reflected at the [software.gsfc.nasa.gov](http://software.gsfc.nasa.gov) website. Out of house development efforts shall be assessed against these same criteria during an independent software peer review which shall include peers fully familiar with the requirements of GSFC GPG-8700.5 and the [software.gsfc.nasa.gov](http://software.gsfc.nasa.gov) website.

**Rationale:** External organizations will often apply pressure to software teams to abandon good engineering practices to reduce costs and/or improve schedule. However, the consistent application of sound and proven discipline engineering practices throughout the life cycle greatly facilitates meeting cost, schedule and quality expectations while managing risk. Sound discipline practices provide the best assurance of developing the right products on schedule and within costs.

Phase:							
<b>Activities:</b>	1. Review NPR 7150 and GPG referenced above. 2. Scope software plans.	1. Develop and execute software acquisition strategy. 2. Classify software products based on mission criticality. 3. Develop software contents of RFPs and proposals. 4. Draft software cost estimates.	1. Develop software Management Plan, CM Plan, Test Plan and Software Requirements as described in NPR and at above website. 2. Complete compliance matrix for NPR 7150.2.	1. Document software development and test plans and adhere to the documented plans and practices. 2. Set up software test environment.	1. Software development, test and deliveries adhere to the documented Plans and practices. 2. Software Maintenance Plan is developed to be consistent with the above website.	1. Software maintenance and test adhere to the documented plan and practices.	N/A
<b>Verification:</b>	1. Verify by observation at MCR that new business plans reflect the intent to follow the above standard.	1. Verify by observation at MDR that 1) SW plans are consistent with formulation and applicable requirements in NPR 7150.2. 2. Perform "Quick Look Review" of the proposed software plan.	1. Verify by observ. at SW SRR that 1) SW Plans and requirements documentation are consistent with GPG and NPR; 2) any waiver requests have been thoroughly evaluated.	1. Verify by observation at Mission CDR and Software PDR.	1. Verify by observation at Software CDR and Mission FOR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Flight Software Branch (582)

**Reference:**<http://software.gsfc.nasa.gov>

## 3.10








## Flight Operations Preparations and Team Development

Mission Operations; Software; Systems



**Principle:** Mission preparation tests shall require a minimum of 2 successful end-to-end tests (to include launch and early orbit simulations), and 2 day-in-the-life simulations, and a minimum of 200 hours with the flight ops team running the flight system. Flight operators shall participate as test conductors during integration and test (I&T) at a minimum as specified in the tests above.

**Rationale:** Using flight operators as test conductors gives them a great deal of real, hands-on experience with the observatory prior to launch without requiring as much time dedicated to FOT training and simulations during operations. Involving the FOT early in the mission helps ensure that the mission design will be considerate of operational requirements and practicalities, and will allow the FOT to become intimately familiar with the mission design, including design rationale.








Phase:							
<b>Activities:</b>	1. Assess the flight operations team's role throughout the mission lifecycle. Flight operations experts review the operations concept.	1. Flight operations and software experts support the development of operations concepts and flight/ground architecture. 2. Update mission design estimates.	1. Identify candidate FOT members. 2. Review and update operations concepts and identify details on approach to operations team support. 3. Conduct peer review flight/ground architecture for soundness.	1. Involve FOT in test plan development. Support the completion of the operations concept.	1. Ensure all FOT members are assigned as test conductors during I&T. 2. Ensure all FOT members gain knowledge & experience on grnd sys during I&T. 3. Prior to launch, require a min of 2 successful end-to-end tests (to include launch & early orbit sims) and 2 day-in-the-life sims, and a min of 200 hrs w/ flight ops team running flight sys 4. Complete flight ops plan.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR 1) Ensure flight development experts were consulted during mission formulation. 2) Ensure that operations concept covers flight ops team's role during entire mission lifecycle.	1. Verify at MDR: 1) Flight operations concepts are sound 2) Inquire about project coordination with the flight software organization.	1. Verify at PDR: 1) flight operations personnel are identified. 2) Flight and ground system interfaces are well defined.	1. Verify at CDR: 1) Flight ops experts have been consulted on the overall system design 2) FOT will provide test conductors during I&T. 3) The project has completed full mission life cycle design.	1. Verify at MOR and FOR: 1) Members of FOT are serving as test conductors during I&T. 2) Test items above were completed at MRR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Systems Integration and Engineering Branch (581)			<b>Reference:</b>	

4.01

**Contamination Control, Planning, and Execution****Mechanical**

**Principle:** Specific contamination control requirements and processes (such as analytical modeling, laboratory investigations, and contamination protection and avoidance plans) that support mission objectives shall be identified.

**Rationale:** Contamination sensitive components are often critical elements that directly affect system performance. It is essential that critical component performance be preserved and not allowed to degrade due to contamination exposure & accumulations.








Phase:							
<b>Activities:</b>	1. Provide within the conceptual study the preliminary contamination control requirements that will drive mission cost, schedule, and design.	1. Update requirements and develop control methodologies. 2. Write draft Contamination Control Plan (CCP) to document cost, schedule, and design requirements.	1. Update CCP as mission and design details evolve.	1. Finalize CCP. 2. Implement appropriate elements of CCP in fabrication.	1. Implement all elements of the CCP.	1. Monitor system performance for evidence of contamination related degradation and prepare mitigation plans if necessary.	N/A
<b>Verification:</b>	1. Verify above at MCR.	1. Verify through peer review, proposal team, and at MRR.	1. Verify through peer review and at MDR.	1. Verify that CCP is under formal configuration control. 2. Verify through peer review and at PDR and CDR.	1. Verify through peer review.	1. Verify mitigation plan at ORR.	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mechanical Systems Division (540)			<b>Reference:</b> GEVS 2.7	





**Principle:** Structural analysis and design factors of safety shall apply to all systems in accordance with GEVS Section 2.2.4.

**Rationale:** This will provide confidence that the hardware will not experience failure or detrimental permanent deformation under test, ground handling, launch, or operational conditions.

Phase:							
<b>Activities:</b>	N/A	1. Employ design factors of safety in accordance with GEVS 2.2.4.	1. Employ design factors of safety in accordance with GEVS 2.2.4.	1. Employ design factors of safety in accordance with GEVS 2.2.4.	1. Employ design factors of safety in accordance with GEVS 2.2.4.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify that factors of safety are defined at MDR.	1. Verify that factors of safety are defined at SDR and PDR.	1. Verify that factors of safety are defined at CDR.	1. Verify that factors of safety are being met at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mechanical Systems Division (540)			<b>Reference:</b> GEVS 2.2.4	

4.06








## Validation of Thermal Coatings Properties

Mechanical



**Principle:** All thermal analysis shall employ thermal coatings properties validated to be accurate for materials and mission flight parameters over the lifecycle of the mission.

**Rationale:** Thermal coatings properties directly affect mission success through S/C or instrument thermal design.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Determine appropriate BOL and EOL coatings properties to be used in the thermal analysis.	1. Update thermal coatings properties as coatings selection matures.	1. Update thermal coatings properties as coatings selection matures. 2. Measure coatings properties when appropriate.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify through peer review and at PDR.	1. Verify at CDR.	1. Verify at PER.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Thermal Engineering Branch (545)

**Reference:**

Coatings Handbook (future)

4.07








## Solder Joint Intermetallics Mitigation

Mechanical



**Principle:** All materials at a solder joint shall be selected to avoid the formation of potentially destructive intermetallic compounds.

**Rationale:** Solder joints can be significantly weakened by excessive intermetallic formations. Particularly destructive is the formation of gold-tin intermetallics which are brittle and change the conductivity of the joints. Substrates to be joined using a soldering process should be selected to mitigate the formation of these compounds.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Substrates and processes shall be selected to avoid the formation of excessive intermetallics. Use of gold coated substrates shall be carefully monitored to keep gold concentration in joint below 5% by weight.	1. Test representative samples of joint materials to assure compatibility.	1. Practices to mitigate the intermetallic formations in solder joints shall be considered if incompatible substrates can't be avoided.	1. Monitor system performance for evidence of potential solder joint-related failures. Use these data to refine solder joint substrate requirements for future missions.	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	Verify at PER.	1. Document lessons learned.	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Materials Engineering Branch (541)			<b>Reference:</b>	

4.08








## Space Environment Effects on Material Selection

Mechanical



**Principle:** Thorough evaluation of the environmental effects of the trajectory paths/orbits shall be assessed for the impact on materials selection and design.

**Rationale:** Understanding the trajectory and orbital environmental effects (e.g., ESD, radiation, Atomic Oxygen, etc.) on the spacecraft will eliminate costly redesign and fixes, as well as minimize the on-orbit failures due to environmental interaction with spacecraft materials.

Phase:							
<b>Activities:</b>	1. Orbit and life requirement information shall be used by MAE to assure compatibility of material selections.	1. Refine materials compatibility analysis.	1. Review preliminary M&P list for environmental compatibility. Effects to be considered should include but not be limited to ESD, thermal effects, radiation, atomic oxygen, and orbital debris. As appropriate, environmental simulation tests shall be conducted to characterize material compatibility.	1. Review updated M&P list for environmental compatibility. Continue material testing as appropriate.	1. Review updated M&P list for environmental compatibility. Continue material testing as appropriate.	N/A	N/A
<b>Verification:</b>	Verify at MCR.	Verify at MDR.	Verify at PDR.	Verify at CDR.	Verify at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Materials Engineering Branch (541)			<b>Reference:</b>	

4.09

**Mechanical Test Factors and Duration****Mechanical**

**Principle:** The project shall employ the mechanical test factors and durations in accordance with Section 2.2.3 of GEVS-SE.

**Rationale:** Using minimum recommended test durations and factors developed over years of development experience will increase confidence in test adequacy and verification status.

Phase:							
<b>Activities:</b>	N/A	N/A	N/A	1. Formulate test plans for all structural elements incorporating the requirements described in the principle.	1. Write test plans and execute tests.	N/A	N/A
<b>Verification:</b>	N/A	N/A	N/A	1. Verify at CDR.	1. Verify at engineering peer reviews, PER, and PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Systems Analysis and Simulation Branch (542)

**Reference:**

GEVS SE 2.2.3

## 4.10








## Minimum Workmanship

## Mechanical



**Principle:** All electrical, electronic, and electro-mechanical components shall be subjected to minimum workmanship test levels as specified in GEVS Section 2.4.2.5.

**Rationale:** The workmanship levels defined in GEVS-SE Section 2.4.2.5 have been found to be the minimum input level necessary to adequately screen aerospace electronic hardware for workmanship flaws.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Envelop minimum workmanship levels when deriving component random vibration test levels.	1. Envelop minimum workmanship levels when deriving component random vibration test levels.	1. Envelop minimum workmanship levels when deriving component random vibration test levels.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify that component test levels envelop minimum workmanship.	1. Verify that component test levels envelop minimum workmanship.	1. Verify that components have been adequately screened for workmanship.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Systems Analysis and Simulation Branch (542)

**Reference:**

GEVS-SE Section 2.4.2.5

4.11








## Testing in Flight Configuration

Mechanical



**Principle:** Mechanical environmental testing (sine, random & acoustic) of flight hardware shall be performed with the test article in appropriate (e.g. launch, landing, etc.) configuration. Hardware that is to be powered on for launch shall be powered on for testing.

**Rationale:** Testing in-flight configuration ensures that hardware that is difficult to analyze (i.e. blankets, harnesses, mechanisms) will be adequately screened by environmental testing for design or workmanship flaws.

Phase:							
<b>Activities:</b>	N/A	N/A	N/A	1. Develop plans necessary to allow testing of hardware in flight configuration.	1. Perform testing in flight configuration.	N/A	N/A
<b>Verification:</b>	N/A	N/A	N/A	1. Verify that appropriate planning has been performed to conduct test in flight configuration.	1. Verify that testing has been performed with the test article in flight configuration.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Systems Analysis and Simulation Branch (542)

**Reference:**

GEVS Sections 2.4.2, 2.4.3, 2.4.4

## 4.12








## Structural Proof Testing

## Mechanical



**Principle:** Primary and secondary structures fabricated from nonmetallic composites, beryllium, or containing bonded joints or bonded inserts shall be proof tested in accordance with GEVS-SE Section 2.4.1.4.1.

**Rationale:** The mechanical strength of the above items is dependent on workmanship and processing and can only be verified by proof testing.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Identify structure requiring proof testing.	1. Develop test methods and plans for performing proof testing.	1. Perform proof testing to verify mechanical strength.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify that all structural elements requiring proof testing have been identified.	1. Verify that approach for proof testing appropriate structural elements has been defined.	1. Verify that proof testing has been performed.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Systems Analysis and Simulation Branch (542)

**Reference:**

GEVS-SE 2.4.1.4.1



4.13








## Modal Survey Characterization

Mechanical



**Principle:** A modal survey shall be performed for flight hardware that has modes in the frequency range as specified in GEVS-SE Section 2.4.1.2.

**Rationale:** Modal surveys are invaluable tools in the process of validating computer model analysis of structures. They are essential elements of any verification process.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Include modal survey in the verification plan and verification matrix for all appropriate structural elements.	1. Formulate test plans describing appropriate modal survey techniques for structural elements.	1. Write test procedures and conduct modal surveys.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify at PER and PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Systems Analysis and Simulation Branch (542)

**Reference:**








GEVS-SE 2.4.1.2.

4.14

**Structural Qualification****Mechanical**

**Principle:** Structural tests that demonstrate that flight hardware is compatible with expected mission environments shall be conducted in compliance with GEVS 2.4.

**Rationale:** Demonstration of structural requirements is a key risk reduction activity during mission development.

Phase:							
<b>Activities:</b>	1. Develop outline of structural qualification methodology.	1. Update structural qualification methodology and develop preliminary strength qualification plan.	1. Develop draft structural qualification methodology and plan.	1. Finalize structural qualification plan. 2. Implement plan.	1. Demonstrate that flight hardware supports expected mission environments and complies with specified verification requirements.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify that plan is under configuration control. 2. Verify through peer review and at PDR.	1. Verify through CDR peer review and at CDR.	1. Verify at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mechanical Engineering Branch (543)			<b>Reference:</b> GEVS Sections 2.4.2, 2.4.3, 2.4.4	

## 4.15








## Torque Margin

## Mechanical



**Principle:** The Torque Margin (TM) requirement defined in GEVS section 2.4.5.3 shall apply to all mechanical functions, those driven by motors as well as springs, etc. at beginning of life (BOL). End of Life (EOL) mechanism performance shall be determined by life testing, and/or by analysis; however, all torque increases due to life test results and/or analysis shall be included in the final TM calculation and verification. Margins shall include all flight drive electronics effects and limitations.

**Rationale:** This torque margin requirement relates to the verification phase of the hardware in question. Conservative decisions should be made during the design phase to ensure adequate margins are realized. However, it is recognized that under some unique circumstances these specified Factors of Safety (FOS) might be detrimental (excessive) to the design of a system. For specific cases that require approval of a waiver, appropriate FOS shall be determined based on design complexity, engineering test data, confidence level, and other pertinent information.

Phase:							
<b>Activities:</b>	N/A	1. Identify and create a plan for determination and implementation for Torque Margin verification.	1. The Torque Margin (TM) shall be calculated per the guidelines in GEVS Section 2.4.5.3 using PDR Factors of Safety. Identify basis for input to analysis.	1. The Torque Margin (TM) shall be calculated per the guidelines in GEVS Section 2.4.5.3 using CDR Factors of Safety. Identify basis for input to analysis. 2. Present all available engineering test data used for these analyses.	1. The Torque Margin (TM) shall be Calculated per the guidelines in GEVS Section 2.4.5.3 using Post Acceptance / Qualification Factors of Safety.	1. Monitor system performance for evidence of mechanism degradation. Use this data to improve future design approaches. 2. Prepare mitigation plan to extend the life of the mission if degradation becomes evident.	N/A
<b>Verification:</b>	N/A	1. The Torque Margin Plan shall be presented at MDR as part of the analysis and verification process.	1. Present TM analysis at PDR.	1. Present TM analysis at CDR.	1. Present final test verified TM analysis at PSR. Identify basis for input to analysis. Present all available hardware verification test data used for these analyses.		N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Engineering Branch (543)

**Reference:**

GEVS (Rev B Draft) 2.4.5.3

## 4.17








## Limits of Certain Alloy Types

## Mechanical



**Principle:** The composition and associated heat treatment of metallic components will be in accordance with Table I of MSFC-STD-3029.

**Rationale:** The random distribution and behavior of alloy elements results in unpredictable fatigue life and potential leakage paths.

Phase:							
<b>Activities:</b>	N/A	N/A	N/A	1. Review all drawings and specifications to assure prohibited materials are not being used in identified situations.	1. Review all drawings and specifications to assure prohibited materials are not being used in identified situations.	N/A	N/A
<b>Verification:</b>	N/A	N/A	N/A	1. Verify at mechanical peer review and at CDR.	1. Verify at PER and PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Mechanical Engineering Branch (543)

**Reference:**

MSFC-STD-3029

4.18








## Deployment and Articulation Verification

Mechanical



**Principle:** All flight deployables, movable appendages, and mechanisms shall demonstrate full range of motion and articulation under worst-case conditions prior to flight.

**Rationale:** Environmental factors such as temperature, gravity, acceleration fields, wire bundle stiffness, and others can adversely effect successful deployment. Verification of these systems under worst-case conditions will improve on-orbit success.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Include articulation in the verification plan and verification matrix.	1. Analyze design and use environment to determine worst case deployment conditions. 2. Demonstrate that all deployable system test plans include provisions to verify deployment under worst case conditions.	1. Update worst case analysis and test plans. 2. Write test procedure(s). 3. Conduct tests.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify worst case condition analysis and test plans/ procedures through engineering peer review and at CDR.	1. Verify test procedures and test results through engineering peer reviews, and at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Mechanical Engineering Branch (543)			<b>Reference:</b>	

4.20








## Fastener Locking

Mechanical



**Principle:** All threaded fasteners shall employ a locking feature.

**Rationale:** If not locked in the torqued, preloaded position, threaded fasteners subjected to vibration and thermal cycling loads will tend to relieve their preload and potentially jeopardize the mission.

Phase:							
<b>Activities:</b>	N/A	N/A	N/A	1. Review all design drawings and specifications to assure all fasteners employ an appropriate locking feature.	1. Inspect all threaded fastener related assemblies to verify that the specified locking feature has been properly applied.	N/A	N/A
<b>Verification:</b>	N/A	N/A	N/A	1. Verify at CDR.	1. Verify at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Electromechanical Systems Branch (544)			<b>Reference:</b>	

## 4.22








## Precision Component Assembly

## Mechanical



**Principle:** When precise location of a component is required, the design shall use a stable, positive location system (not relying on friction) as the primary means of attachment.

**Rationale:** When in the domain of arc-sec to sub-arc-sec location requirements, the use of pinning or similar non-friction reliant method will help ensure alignment is maintained through all expected stresses.

Phase:							
<b>Activities:</b>	1. Begin to identify potential high precision interfaces.	1. Refine identification of high precision interfaces.	1. Identify methodology for precise location attachment.	1. Design and document attachment methods.	1. Inspect assemblies to assure specified attachment techniques are properly applied.	N/A	N/A
<b>Verification:</b>	N/A	N/A	1. Verify through peer review and at PDR.	1. Verify through peer review and at CDR.	1. Verify through peer review and at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Electromechanical Systems Branch (544)			<b>Reference:</b>	

## 4.23








## Life Test

## Mechanical



**Principle:** A life test shall be conducted, within representative operational environments, to at least 2x expected life for all repetitive motion devices with a goal of completing 1x expected life by CDR.

**Rationale:** Reliability of electro-mechanical systems can have serious mission success implications. Documented life testing must be performed which demonstrate performance requirements for mission life. Life tests must consider the flight drive electronics effects and limitations.

Phase:							
<b>Activities:</b>	N/A	1. Develop a life test outline for all repetitive motion devices.	1. Develop draft life test plan.	1. Finalize plan and implement.	1. Present life test conclusions and compare to mission performance requirements.	N/A	N/A
<b>Verification:</b>	N/A	1. Verify at MDR.	1. Verify that plan has been drafted at PDR.	1. Verify plan and any existing life test data.	1. Verify life test results at PER and PSR.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Electromechanical Systems Branch (544)

**Reference:**

GEVS-SE 2.4.5.1



## 4.24








## Mechanical Clearance Verification

## Mechanical



**Principle:** Verification of mechanical clearances and margins (e.g. potential reduced clearances after blanket expansion) shall be performed on the final as-built hardware.

**Rationale:** Proper mechanical clearances are often critical to successful on-orbit performance (e.g. free-movement area, thruster impingement, FOV, etc.). Verification through analysis and drawing checking alone is not sufficient to properly demonstrate adequate clearance.

Phase:							
<b>Activities:</b>	N/A	N/A	N/A	1. Demonstrate that mechanical integration plans include provisions for verifying mechanical clearances at appropriate integration milestones. 2. Conduct inspections and measurements.	1. Demonstrate that mechanical integration plans include provisions for verifying mechanical clearances at appropriate integration milestones. 2. Conduct inspections and measurements.	N/A	N/A
<b>Verification:</b>	N/A	N/A	N/A	Verify at CDR.	1. Verify at PER and PSR.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Electromechanical Systems Branch (544)			<b>Reference:</b>	

## 4.25








## Thermal Design Margins

## Mechanical



**Principle:** Thermal design shall provide adequate margin between stacked worst-case flight predictions and component allowable flight temperature limits.  
 Note: This applies to normal operations and planned contingency modes. This does not apply to cryogenic systems.

**Rationale:** Positive temperature margins are required to account for uncertainties in power dissipations, environments, and thermal system parameters.

Phase:							
<b>Activities:</b>	1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin. For Pre-A, larger margins advisable.	1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin. For Phase A, larger margins advisable.	1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.	1. Thermal design concept produces minimum 5C margins, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.	1. System thermal balance test produces test-correlated model. Test and worst-case flight thermal analysis with test-correlated model demonstrate minimum 5C margins, except for heater controlled elements which demonstrate a maximum 70% heater duty cycle, and two-phase flow systems which demonstrate a minimum 30% heat transport margin.	1. Thermal analysis with flight-correlated model shows minimum 5C margins for mission trade studies, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.	1. Thermal analysis with flight-correlated model shows minimum 5C margins for mission disposal options, except for heater controlled elements which have a maximum 70% heater duty cycle, and two-phase flow systems which have a minimum 30% heat transport margin.
<b>Verification:</b>	1. Verify at MCR.	1. Verify worst-case thermal analysis of concept through peer review and at SRR and MDR.	1. Verify worst-case thermal analysis of design through peer review and at PDR.	1. Verify worst-case thermal analysis of detailed design through peer review and at CDR.	1. Verify through peer review and at PER and PSR.	1. Verify thermal analysis of flight system using flight-correlated thermal model through peer review.	1. Verify thermal analysis of flight system using flight-correlated thermal model through peer review.

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Thermal Engineering Branch (545)

**Reference:**

GEVS 2.63; 545-PG-8700.2.1

4.26








## Thermal Design Margins - Unplanned Conditions

Mechanical



**Principle:** For credible abnormal conditions, the thermal design shall maintain temperatures with allowable flight temperature (AFT) limits extended by +/- 5C (Flight Acceptance (FA) temperature range).

**Rationale:** The Acceptance Temperature margin of +/-5C can be used to absorb temperature impacts resulting from credible abnormal conditions such as anomaly-induced power dissipation, off-nominal sun attitude conditions, and/or thermal control element (active or passive) anomalous behavior.

Phase:							
<b>Activities:</b>	N/A	N/A	1. Systems Engineering defines credible abnormal conditions for inclusion in system definition for thermal analysis.	1. Systems Engineering refines and updates credible conditions for evaluation in system definition for thermal analysis.	1. Thermal Balance Testing shall include, where appropriate, a simulation of the abnormal credible condition for empirical evaluation.	1. Thermal analysis with flight-correlated model shows temperatures at or less than FA Limits for System Engineering defined credible abnormal conditions.	1. Thermal analysis with flight-correlated model shows temperatures at or less than FA Limits for System Engineering defined credible abnormal conditions.
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify through peer review and at PSR.	1. Verify through thermal analysis of flight system using flight-correlated thermal model.	1. Verify through thermal analysis of flight system using flight-correlated thermal model.
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Thermal Engineering Branch (545)			<b>Reference:</b> JPL D-17868 rev. 2: 4.8.2.4	

4.27








## Test Temperature Margins

Mechanical



**Principle:** Components and systems shall be tested beyond allowable flight temperature limits. The margin required for proto-flight thermal vacuum testing is 10C beyond allowable flight temperature limits. Acceptance test margin may be reduced to 5C. For actively controlled systems with selectable/variable setpoints, the margin may be reduced to 5C. For active control systems with a fixed setpoint, margin shall be demonstrated by increasing or decreasing (as appropriate) the heat load (internal or external) by at least 30% and still maintain the control temperature.

**Rationale:** (Note: This rule does not apply to cryogenic systems.)

Phase:							
<b>Activities:</b>	N/A	N/A	1. Component proto-flight thermal vacuum test temperatures shall be specified with the required margin as stated in principle above.	1. Component, subsystem, and system proto-flight thermal vacuum test temperatures shall be specified with the required margin as stated in principle above.	1. Components and systems shall undergo proto-flight thermal vacuum testing with the required margin as stated in principle above. Yellow and Red limits for flight temperature telemetry data base shall be consistent with actual proto-flight system thermal vacuum test temperatures.	1. Yellow and Red limits for flight temperature telemetry data base shall be consistent with actual proto-flight system thermal vacuum test temperatures.	1. Yellow and Red limits for flight temperature telemetry data base shall be consistent with actual proto-flight system thermal vacuum test temperatures.
<b>Verification:</b>	N/A	N/A	1. Verify at PDR.	1. Verify at CDR.	1. Verify results of component and subsystem thermal vacuum tests at PER. 2. Verify results of system thermal vacuum test at PSR. 3. Verify flight data base limits at MRR and/or FRR.		
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Thermal Engineering Branch (545)			<b>Reference:</b> GEVS 2.6	

4.28








## Thermal Design Margin Verification

Mechanical



**Principle:** All subsystems/systems having a thermal design with identifiable thermal design margins shall be subject to a Thermal Balance Test at the appropriate assembly level per GEVS Section 2.6.

**Rationale:** This test shall provide an empirical verification of the subsystem/system's thermal design margin. In addition, steady state temperature data from this test shall be used to validate subsystem/system thermal math models (TMMs).

Phase:							
<b>Activities:</b>	1. Identify thermal balance test concepts.	1. Include thermal balance test in environmental test plan.	1. Identify preliminary thermal balance test architecture and scope.	1. Identify specific thermal balance test architecture and cases.	1. Implement test.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR	1. Verify at MDR.	1. Verify at SDR and PDR.	1. Verify at CDR.	1. Verify at PER.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Thermal Engineering Branch (545)








**Reference:**

4.29

**Thermal-Vacuum Cycling****Mechanical**

**Principle:** All systems flying in unpressurized areas shall have been subjected to a minimum of eight (8) thermal-vacuum test cycles prior to installation on a spacecraft. Four (4) of these cycles may include cycles at the subsystem or instrument level of assembly.

**Rationale:** This provides workmanship and performance verifications at lower levels of assembly where required environments can be achieved and reduces the risk to cost during spacecraft Integration and Test (I&T).

Phase:							
<b>Activities:</b>	1. Identify environmental test concept.	1. Develop preliminary environmental test plan.	1. Update environmental test plan and put under configuration control.	1. Update plan.	1. Implement test cycles.	N/A	N/A
<b>Verification:</b>	1. Verify at MCR.	1. Verify at MDR.	1. Verify at SDR and PDR.	1. Verify at CDR.	1. Verify that all components have seen required testing prior to spacecraft I&T at PER.	N/A	N/A

**Revision Status:**

Baseline Release December 10, 2004

**Owner:**

Office of Systems Safety and Mission Assurance (300)








**Reference:**

GEVS 2.6.2.4.b



**Principle:** All technologies shall achieve a TRL 6 by PDR. Not applicable to technology demonstration opportunities.

**Rationale:** The use of new and unproven technologies requires a thorough qualification program in order to reduce risk to an acceptable level.

Phase:							
<b>Activities:</b>	1. Identify relevant technologies, readiness levels, develop overall risk mitigation plan (including fall back to existing technologies), and conduct peer review(s).	1. Develop qualification plan for specific technologies, including risk mitigation. Peer review plan.	1. Implement qualification plan and demonstrate that TRL 6 has been achieved. Peer review qualification results.	N/A	N/A	N/A	N/A
<b>Verification:</b>	1. Review summary documentation at MCR.	1. Review summary documentation at MDR.	1. Review summary documentation at PDR.	N/A	N/A	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004				<b>Owner:</b> Applied Engineering and Technology Directorate (500)		<b>Reference:</b>	

## 5.04








## Instrument Testing for Multipaction

Instruments; Electrical



**Principle:** Active RF components, such as radars, shall be designed and tested for immunity to multipaction.

**Rationale:** Multipaction on RF components that carry large amounts of RF power can degrade overall performance and cause damage. Unless significant design margin is demonstrated, small unit-to-unit variations make it impossible to predict whether an RF component is susceptible to multipaction.

Phase:							
<b>Activities:</b>	1. Determine the likely maximum power levels that components are going to see and determine if multipaction could be an issue.	1. Further refine power requirements and for components that are likely to have multipaction issues. 2. Begin vendor research to determine the extent of the issues.	1. Down select vendor and finalize component performance and power requirements. 2. Develop multipaction immunity verification plan.	1. Build engineering models of all components that could experience multipaction and perform testing on these components before and after environmental testing.	1. Build flight models and perform multipaction testing on all flight components before and after environmental testing.	1. Monitor instrument performance to determine if component damage or degradation is occurring due to multipaction.	N/A
<b>Verification:</b>		1. Gather data from multiple vendors to have several points of comparison.	1. Verify design and verification plan at PDR.	1. Verify results of EM testing at CDR.	1. Verify results of testing at PSR.	1. Track long-term performance of instrument for trends in overall performance and compare to expectations.	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Microwave Instrument Technology Branch (555)			<b>Reference:</b>	



5.05








## Fluid Systems GSE

Instruments



**Principle:** Fluid systems GSE used to pressurize flight systems shall be single-fault tolerant against over-pressurizing the flight system.








**Rationale:** Fluid systems GSE is usually at a pressure significantly above the flight systems final pressure and therefore poses a risk of over-pressurizing the flight system.

Phase:							
<b>Activities:</b>	1. Recognize the need for this specialized GSE.	1. Determine if candidate GSE exist and availability (versus a new build).	1. Secure agreement for existing GSE. 2. Design new GSE and procure components.	1. Recertify existing GSE before use. 2. Assemble and certify GSE.	1. Use GSE to test flight system (and components if necessary).	N/A	N/A
<b>Verification:</b>	1. Verify inclusion in proposal write-up and cost estimate.	1. Present GSE assessment at MDR.	1. Verify through peer review and at PDR.	1. Present certification at CDR.	1. Verify that procedures for GSE are approved by PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Cryogenics and Fluids Branch (552)			<b>Reference:</b>	



**Principle:** Flight instruments and their components shall be characterized for performance over their expected operating temperature range.

**Rationale:** Detector performance falls off rapidly as a function of temperature for both increasing and decreasing temperature. Additionally, structural-thermal, and optical performance models need to be correlated against tests.

Phase:							
<b>Activities:</b>	1. Test mission-enabling parts and components at room temperature (extrapolate performance at other than room temperature).	1. Test critical parts and components over the flight operation temperature range, plus margin (no extrapolations) beyond intended operating range.	1. Test flight-like subsystem and components over the flight operation temperature range, plus margin beyond intended operating range.	1. Test flight-like systems and components over operating temperature range, plus margin beyond intended operating range.	1. Test flight system over operating temperature range, plus margin beyond intended operating range.	N/A	N/A
<b>Verification:</b>	1. Test result reviewed by principal investigator.	1. Test result reviewed by principal investigator and science working group.	1. Review summary of results at PDR.	1. Review summary of results at CDR.	1. Verify through peer review and at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Detector Systems Branch (553)			<b>Reference:</b>	

5.07








## Laser Design

Instruments



**Principle:** Flight laser designs shall adhere to 554-PG-8700.1.1.

**Rationale:** It has been shown that long-term reliability is substantially improved by following the requirements outlined in 554-PG-8700.1.1.

Phase:							
<b>Activities:</b>	1. Develop laser conceptual design.	1. Refine laser conceptual design and conduct a peer review.	1. Initiate the flight laser preliminary design.	1. Finalize laser design.	1. Assemble and test laser.	1. Track performance through post-launch checkout and early operations.	N/A
<b>Verification:</b>	1. Verify at MCR that the conceptual design adheres to the requirements.	1. Present peer review findings at MDR.	1. Review design at PDR.	1. Review design at CDR.	1. Review at PER and PSR.	1. Disseminate summary to laser community.	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Laser and Electronic Optics Branch (554)			<b>Reference:</b>	

5.08








## Laser Development Contamination Control

Instruments



**Principle:** All flight laser development shall include an approved laser-specific Contamination Control Plan (CCP).

**Rationale:** Component and/or system contamination has been identified as the contributing cause in most laser failures to-date. There are unique requirements of a laser CCP that differ significantly from those of a general CCP (as required by 4.01).

Phase:							
<b>Activities:</b>	N/A	N/A	1. Review 'Laser Contamination Control Plan Outline' and prepare a program specific CCP.	1. Implement CCP at the component level.	1. Continue implementation of the CCP through launch.	1. Continue any post-launch aspects of the CCP.	N/A
<b>Verification:</b>	N/A	N/A	1. Review documentation at PDR.	1. Verify at CDR.	1. Verify at PER and PSR.	1. Verify post-launch summary of activities.	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Laser and Electronic Optics Branch (554)			<b>Reference:</b>	

5.09








**Cryogenic Pressure Relief**

Instruments



**Principle:** Stored cryogen systems (and related GSE) shall be single fault tolerant against over-pressurization due to blockage or failure of a relief path.

**Rationale:** Credible, albeit unintended, conditions can lead to potential system over-pressurization.

Phase:							
<b>Activities:</b>	1. Identify personnel or organization to conduct the appropriate analyses during subsequent phases.	1. Identify underlying assumptions and conduct preliminary emergency venting analysis.	1. Refine analysis and identify candidate relief devices.	1. Finalize analysis and include relief devices in design. Procure devices and test them at the component level.	1. Include the devices in the hardware build-up and test function during build-up as appropriate. 2. Review flight hardware and GSE configurations prior to testing to ensure that relief paths are not circumvented.	N/A	N/A
<b>Verification:</b>	1. Grass-root cost estimate to include cryogenic engineering.	1. Ensure venting analysis included in larger cryogenic system analysis report/summary that is reviewed by the system engineer and/or review team.	1. Review at PDR.	1. Review at CDR.	1. Review at PER.	N/A	N/A
<b>Revision Status:</b> Baseline Release December 10, 2004			<b>Owner:</b> Cryogenics and Fluids Branch (552)			<b>Reference:</b>	

## GLOSSARY AND ACRONYM GUIDE

Anomaly	An unanticipated or unpredicted behavior that occurs as a discrete episode.
ASIC	Application Specific Integrated Circuit
Assembly	A functional subdivision of a component consisting of parts or subassemblies that perform functions necessary for the operation of a component as a whole. (Ref: GEVS 1-6)
ACS	Attitude Control System
BOL	Beginning of Life
Breadboard	A model used to test hardware at TRL 4 or 5. (See TRL levels.)
CCB	Configuration Control Board
CCP	Contamination Control Plan
CDR	Critical Design Review
CI	Configuration Item
CM	Configuration Management. A management discipline applied over the product's life cycle to provide visibility and to control performance and functional and physical characteristics. (Ref: NPR 7120.5b)
Component	A functional subdivision of a subsystem and generally a self-contained combination of items performing a function necessary for the subsystem's operation. (Ref: GEVS 1-6)

DR	Decommissioning Review
EEE	Electrical Engineering
EGSE	Electrical Ground Support Equipment
Element	A portion of a hardware or software unit that is logically discrete.
EMC	Electromagnetic Compatibility
End-to-end test	A test performed on the integrated ground and flight system, including all elements of the payload, its control, stimulation, communications, and data processing. (Ref: GEVS 1-5)
ETU	Engineering Test Unit
EOL	End of Life
FDAC	Failure Detection and Correction
FOR	Flight Operations Review
FOS	Factors of Safety
FOV	Field of Vision
FPGA	Field Programmable Gate Arrays
FSW	Flight Software
GEVS	General Environmental Verification Specification

GMF	Geomagnetic Field
GN&C	Guidance, Navigation, and Control
GPR	Goddard Policy Requirement
GSE	Ground Support Equipment
Heritage hardware	Hardware from a previous project, program, or mission.
High fidelity	Addresses form, fit, and function. Equipment that can simulate and validate all system specifications within a laboratory setting. (Ref: Defense Acquisition University)
High-level objectives	High level objectives – science or technology validation objectives that define the purpose of the mission. Also Level 0 requirements.
HW	Hardware
ICD	Interface Control Document
ICR	Initial Confirmation Review
ITU	Integrated Test Unit
I&T	Integration and Testing
LRR	Launch Readiness Review
Level 1 Requirements	A Project's fundamental and basic set of requirements levied by the Program or Headquarters on the Project. (Ref: GPG 7120.5) Level 1 Requirements are sufficient to define the scope of scientific or technology validation objectives and describe the measurements required to achieve these objectives.



	Level 1 Requirements should also define success criteria for an expected mission and a minimum mission.
Level 2 Requirements	Requirements allocated to mission segments (instruments, spacecraft bus, ground system, and launch vehicle). Level 2 Requirements also envelop Mission Assurance Requirements and technical resource allocations.
Level 3 Requirements	Subsystem requirements. Level 3 Requirements include instrument specifications and interface definitions.
Level 4 Requirements	Component requirements. Level 4 Requirements cover all hardware and software components to be designed or procured, such as optics, filter wheels, and CCDs.
Margin	The amount by which hardware capability exceeds requirements. (Ref: GEVS 1-7)
MAR	Mission Assurance Requirement
MAE	Materials Assurance Engineer
MDR	Mission Definition Review
MCR	Mission Concept Review
Mission-critical	Item or function that must retain its operational capability to assure no mission failure. (See Mission success.) (Ref: MSFC SMA Directorate)
Mission success	Those activities performed in line and under the control of the program or project that are necessary to provide assurance that the program or project will achieve its objectives. The mission success activities will typically include risk assessments, system safety engineering, reliability analysis, quality assurance, electronic and mechanical parts control, software validation, failure reporting/resolution, and other activities that are normally part of a program or project work structure. (Ref: NPR 7120.5b)

MOR	Mission Operations Review
M&P	Materials and Processes
OOB	Out-of-band
ORR	Operational Readiness Review
OTS	Off-the-shelf
Payload	An integrated assemblage of modules, subsystems, etc., designed to perform a specified mission in space. (Ref: GEVS 1-7)
PDR	Preliminary Design Review
PER	Pre-Environmental Review
Performance Verification	Determination by test, analysis, or a combination of the two that the payload element can operate as intended in a particular mission. (Ref: GEVS 1-7)
PLD	Programmable Logic Device
Project execution	The performance with respect to schedule, cost, and other key managerial metrics and considerations.
Prototype hardware	Hardware of a new design. It is subject to a design qualification test program; it is not intended for flight. (Ref: GEVS 1-6)
PSR	Pre-Ship Review
RF	Radio Frequency

RHA	Radiation Hardness Assurance
Safe Hold Mode	A control mode designed to provide a spacecraft with a mode to preserve its health and safety while recovery efforts are undertaken.
Safety	Freedom from those conditions that can cause death, injury, occupational illness, damage to or loss of equipment or property, or damage to the environment. (Ref: NPR 7120.5b)
SAR	System Acceptance Review
S/C	Spacecraft
SDR	System Design Review
SEMP	Systems Engineering Management Plan
Simulation	A synthetic representation of the characteristics of real world system or situation, typically by interfacing controls and displays (operational or simulated) and positions of the system with a computer. (Ref: MIL-HDBK-220B)
SMO	Systems Management Office
SORR	Science Operations Readiness Review
Spare part	A replacement part (reparable or expendable supplies) purchased for use in the maintenance of systems such as aircraft, launch vehicles, spacecraft, satellites, ground communication systems, ground support equipment, and associated test equipment. It can include line-replaceable units, orbit replaceable units, shop-replaceable units, or piece parts used to repair subassemblies. (Ref: NPR 5900.1)
SPP	Spare Parts Program

SRR	System Readiness Review
Subsystem	A functional subdivision of a payload consisting of two or more components. (Ref: GEVS 1-6)
System	The combination of elements that function together to produce the capability required to meet a need. The elements include all hardware, software, equipment, facilities, personnel, processes, and procedures needed for this purpose. (Ref: NPR 7120.5, NASA Program and Project Management Processes and Requirements.)
System Integrity	The ability of a system to maintain its form and function. (See System)
SW	Software
T&C	Telemetry and Command
T&M	Time and Materials
TM	Torque Margin
TRL	<p>Technology Readiness Level - A systematic metric/measurement system that supports assessments of the maturity of a particular technology and the consistent comparison of maturity between different types of technology. NASA recognizes nine technological readiness levels:</p> <p>TRL 9 Actual system “flight proven” through successful mission operations</p> <p>TRL 8 Actual system completed and “flight qualified” through test and demonstration (ground or flight)</p> <p>TRL 7 System prototype demonstration in a space environment</p> <p>TRL 6 System/subsystem model or prototype demonstration in a relevant environment (ground or space)</p>

TRL 5 Component and/or breadboard validation in relevant environment

TRL 4 Component and/or breadboard validation in laboratory environment

TRL 3 Analytical and experimental critical function and/or characteristic proof-of-concept

TRL 2 Technology concept and/or application formulated

TRL 1 Basic principles observed and reported

(Ref: Space Science Enterprise Management Handbook, Appendix E 11)

Traceability Matrix

A matrix demonstrating the flow-down of requirements to successively lower levels.

TSR

Technical Status Review

Validation

Proof that Operations Concept, Requirements, and Architecture and Design will meet Mission Objectives, that they are consistent, and that the “right system” has been designed. May be determined by a combination of test or analysis. Generally accomplished through trade studies and performance analysis by Phase B and through tests in Phase D. (Ref: GPG 7120.5)

Verification

Proof of compliance with requirements and that the system has been “designed and built right.” May be determined by a combination of test, analysis, and inspection. (Ref: GPG 7120.5)