

Management Plan for Waste Collection and Disposal

International Space Station Program

Revision B


August 2005



РОСКОСМОС



National Aeronautics and Space Administration
International Space Station Program
Johnson Space Center
Houston, Texas



SSP 50481
Revision B

REVISION AND HISTORY PAGE

| REV. | DESCRIPTION | PUB. DATE |
|-------------|---|----------------------|
| - | Initial Release (Reference per SSCD 004438, EFF. 12-06-01) | 01-17-02 |
| | DCN 001 (Reference per SSCD 007036, EFF. 06-06-03; SSCD 007036R1, EFF. 07-27-03) | 10-06-03 |
| A | Revision A (Reference per SSCD 008482, EFF. 02-25-05) | |
| | Early Release | 04-07-05 |
| | Program Release | 08-30-05 |
| B | Revision B (Reference per SSCD 008828, EFF. 08-23-05) | |
| | Early Release | 08-30-05 |
| | Program Release | 11-06-07 |

SSP 50481
Revision B

INTERNATIONAL SPACE STATION PROGRAM

MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL

CHANGE SHEET

August 26, 2005

Revision B

Space Station Control Board Directive 008828/(1-1), dated 08-23-05. (1)

CHANGE INSTRUCTIONS

SSP 50481, Management Plan for Waste Collection and Disposal, has been approved by the authority of SSCD 008828. All future updates to this document will be identified on this change sheet.

SSP 50481
Revision B

INTERNATIONAL SPACE STATION PROGRAM

MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL

Revision B (Reference SSCD 008828, dated 08-23-05)

LIST OF EFFECTIVE PAGES

August 26, 2005

The current status of all pages in this document is as shown below:

| <u>Page</u> | <u>Change No.</u> | <u>SSCD No.</u> | <u>Date</u> |
|-------------|-------------------|-----------------|-----------------|
| i - ix | Revision B | 008828 | August 23, 2005 |
| 1-1 | Revision B | 008828 | August 23, 2005 |
| 2-1 - 2-4 | Revision B | 008828 | August 23, 2005 |
| 3-1 - 3-3 | Revision B | 008828 | August 23, 2005 |
| 4-1 - 4-4 | Revision B | 008828 | August 23, 2005 |
| 5-1 - 5-5 | Revision B | 008828 | August 23, 2005 |
| 6-1 - 6-4 | Revision B | 008828 | August 23, 2005 |
| 7-1 - 7-3 | Revision B | 008828 | August 23, 2005 |
| A-1 - A-4 | Revision B | 008828 | August 23, 2005 |
| B-1 - B-2 | Revision B | 008828 | August 23, 2005 |
| C-1 - C-2 | Revision B | 008828 | August 23, 2005 |
| D-1 - D-18 | Revision B | 008828 | August 23, 2005 |
| E-1 - E-4 | Revision B | 008828 | August 23, 2005 |
| F-1 - F-2 | Revision B | 008828 | August 23, 2005 |
| G-1 - G-2 | Revision B | 008828 | August 23, 2005 |

SSP 50481
Revision B

INTERNATIONAL SPACE STATION PROGRAM
MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL


AUGUST 2005

SSP 50481
Revision B

MIOCB APPROVAL NOTICE

INTERNATIONAL SPACE STATION PROGRAM MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL

AUGUST 2005

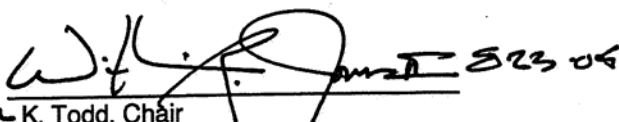
for K. Todd, Chair
Mission Integration and Operations
Control Board

I. Khamits, ISS Russian Segment
Program Deputy Director

H. Pieterek,
European Space Agency


SSP 50481
Revision B

US CONCURRENCE


INTERNATIONAL SPACE STATION PROGRAM

MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL


AUGUST 2005

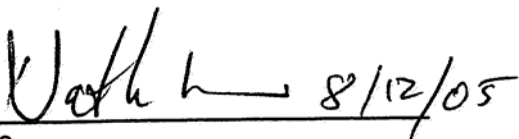 8/12/05

N. Moore
Co-Chair, Trash/Waste Integration Group
National Aeronautics and
Space Administration

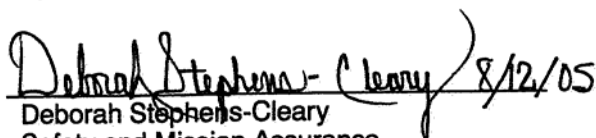 8/12/05

Deborah Stephens-Cleary
Safety and Mission Assurance
National Aeronautics and
Space Administration

 8-11-05

M. Ivinis
Astronaut
National Aeronautics and
Space Administration

 8-12-05

Delegated Representative
Data Management
MIC DQA

SSP 50481
Revision B

RUSSIAN CONCURRENCE
INTERNATIONAL SPACE STATION PROGRAM
MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL
AUGUST 2005

P. Vorobiev
Rocket Space Corporation - Energia

M. Shutikov
Rocket Space Corporation - Energia

A. Telegin
Rocket Space Corporation - Energia

V. Tsvetkov
Rocket Space Corporation - Energia

A. Safanov
Rocket Space Corporation - Energia

I. Petrushkevich
Rocket Space Corporation - Energia

M. Sychova
Rocket Space Corporation - Energia

L. Bobrysheva
Co-Chair Trash/Waste Integration Group
Rocket Space Corporation - Energia

N. Koledov
Rocket Space Corporation - Energia

G. Karasyova
Rocket Space Corporation - Energia

V. Morozov
Rocket Space Corporation - Energia

A. Bideev
Rocket Space Corporation - Energia

A. Monakhov
Rocket Space Corporation - Energia

SSP 50481
Revision B

ESA CONCURRENCE

INTERNATIONAL SPACE STATION PROGRAM

MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL

AUGUST 2005

Alberto Novelli
Automated Transfer Vehicle
Operations and Integration Manager
European Space Agency

SSP 50481
Revision B

INTERNATIONAL SPACE STATION PROGRAM
MANAGEMENT PLAN FOR WASTE COLLECTION AND DISPOSAL

LIST OF CHANGES

AUGUST 2005

All changes to paragraphs, tables, and figures in this document are shown below:

| MIOCB | Entry Date | Change | Paragraph(s) |
|--------------|-------------------|---------------|---------------------|
| | August 2001 | Baseline | All |
| | August 2003 | DCN 001 | |
| | July 2004 | Revision A | All |
| | August 2005 | Revision B | All |

TABLE OF CONTENTS

| PARAGRAPH | PAGE |
|---|------|
| 1.0 INTRODUCTION | 1-1 |
| 1.1 PURPOSE | 1-1 |
| 1.2 SCOPE | 1-1 |
| 1.3 PRECEDENCE | 1-1 |
| 1.4 DELEGATION OF AUTHORITY | 1-1 |
| 1.5 WAIVER/DEVIATION | 1-1 |
| 1.6 ISSUES AND OPEN WORK | 1-1 |
| 2.0 DOCUMENTS | 2-1 |
| 2.1 APPLICABLE DOCUMENTS | 2-1 |
| 2.2 REFERENCE DOCUMENTS | 2-2 |
| 3.0 WASTE TYPES, SOURCES AND CLASSIFICATIONS | 3-1 |
| 3.1 TYPES OF WASTE | 3-1 |
| 3.1.1 CREW COMMON WASTE | 3-1 |
| 3.1.2 HARDWARE WASTE | 3-1 |
| 3.1.3 PAYLOAD WASTE | 3-1 |
| 3.1.4 LAUNCH RESTRAINT WASTE | 3-2 |
| 3.2 SOURCES OF WASTE | 3-2 |
| 3.3 WASTE CLASSIFICATIONS | 3-2 |
| 3.3.1 HAZARDOUS WASTE | 3-2 |
| 3.3.2 NONHAZARDOUS WASTE | 3-3 |
| 3.3.3 TOXIC WASTE | 3-3 |
| 4.0 WASTE CONTAINER | 4-1 |
| 4.1 STANDARD WASTE CONTAINER | 4-1 |
| 4.1.1 WASTE CONTAINER USAGE | 4-1 |
| 4.1.2 WASTE HARDWARE CONTAINER CERTIFICATION | 4-3 |
| 4.1.3 CREW COMMON WASTE CONTAINER USAGE RATE ESTIMATE | 4-4 |
| 4.2 NON-STANDARD WASTE CONTAINERS | 4-4 |
| 5.0 WASTE MANAGEMENT RESPONSIBILITIES | 5-1 |
| 5.1 WASTE CONTAINERS, SAFETY AND HANDLING | 5-1 |
| 5.1.1 WASTE CONTAINERS | 5-1 |
| 5.1.2 FLIGHT SAFETY | 5-1 |
| 5.1.3 GROUND SAFETY | 5-2 |
| 5.1.4 WASTE HANDLING | 5-2 |
| 5.2 WASTE ALLOCATION/STOWAGE | 5-2 |
| 5.2.1 ALLOCATION | 5-2 |
| 5.2.2 ON-ORBIT STOWAGE INTEGRATION | 5-3 |
| 5.3 CREW TRAINING | 5-3 |

SSP 50481

Revision B

| | | |
|-------|--|-----|
| 5.4 | INCREMENT DISPOSAL PLANNING | 5-3 |
| 5.4.1 | ASSESSMENT | 5-3 |
| 5.4.2 | FLIGHT READINESS | 5-4 |
| 5.4.3 | INCREMENT DEFINITION AND REQUIREMENTS DOCUMENT | 5-4 |
| 5.4.4 | WASTE IDENTIFICATION | 5-4 |
| 5.4.5 | JOINT WASTE MANAGEMENT TELECON | 5-5 |
| 5.4.6 | POST INCREMENT CREW DEBRIEF | 5-5 |
| 6.0 | ON-ORBIT PROCESSES | 6-1 |
| 6.1 | WASTE CONTAINMENT, HANDLING AND LABELING | 6-1 |
| 6.1.1 | BATTERY WASTE | 6-1 |
| 6.1.2 | BIOLOGICAL/BIOMEDICAL WASTE | 6-1 |
| 6.1.3 | SHARPS WASTE | 6-1 |
| 6.1.4 | CHEMICAL WASTE | 6-1 |
| 6.1.5 | RADIOACTIVE WASTE | 6-2 |
| 6.1.6 | NON-HAZARDOUS WASTE | 6-2 |
| 6.2 | STOWAGE | 6-2 |
| 6.2.1 | WASTE STOWAGE LOCATIONS | 6-2 |
| 6.2.2 | UNUSED WASTE HARDWARE STOWAGE LOCATION | 6-3 |
| 6.3 | PERIODIC STATUS TO GROUND | 6-3 |
| 6.4 | LABELING | 6-3 |
| 6.4.1 | NON-HAZARDOUS WASTE LABELING | 6-3 |
| 6.4.2 | HAZARDOUS WASTE LABELING | 6-3 |
| 6.4.3 | TOXICITY IDENTIFICATION | 6-4 |
| 7.0 | WASTE DISPOSAL PLANNING | 7-1 |
| 7.1 | PRIORITIZATION FOR REMOVAL | 7-1 |
| 7.2 | DOWN MANIFEST PLANNING | 7-1 |
| 7.3 | UNITED STATES WASTE DISPOSAL ON RUSSIAN VEHICLES | 7-1 |
| 7.3.1 | PROGRESS WASTE DISPOSAL | 7-2 |
| 7.3.2 | SOYUZ WASTE DISPOSAL | 7-2 |
| 7.4 | SHUTTLE WASTE DISPOSAL | 7-2 |
| 7.5 | AUTOMATED TRANSFER VEHICLE WASTE DISPOSAL | 7-3 |

APPENDIX

| | | |
|---|-------------------------------------|-----|
| A | ACRONYMS AND ABBREVIATIONS | A-1 |
| B | GLOSSARY OF TERMS <RESERVED> | B-1 |
| C | OPEN WORK | C-1 |
| D | WASTE HARDWARE DESCRIPTION | D-1 |
| E | TRASH/WASTE INTEGRATION GROUP | E-1 |
| F | WASTE LABEL EXAMPLE | F-1 |
| G | CREW COMMON WASTE | G-1 |

SSP 50481
Revision B

TABLE

| | | |
|-------|--|-----|
| 3.3-1 | HAZARDOUS WASTE CLASSIFICATION | 3-2 |
| 4.1-1 | WASTE CONTAINER USAGE | 4-2 |
| 4.1-2 | WASTE CONTAINER VEHICLE CERTIFICATION | 4-3 |
| 4.1-3 | USAGE RATES FOR CREW COMMON WASTE CONTAINERS | 4-4 |
| C-1 | TO BE DETERMINED ITEMS | C-2 |
| C-2 | TO BE RESOLVED ISSUES | C-2 |

FIGURE

| | | |
|------|--|------|
| D-1 | SOFT TRASH CONTAINER..... | D-3 |
| D-2 | RUBBER LINED BAG | D-4 |
| D-3 | SOLID WASTE CONTAINER..... | D-5 |
| D-4 | CONTAINER FOR WATER/URINE..... | D-6 |
| D-5 | FOOD WASTE BAG..... | D-7 |
| D-6 | CRUMB BAG..... | D-8 |
| D-7 | GENERAL USE SHARPS CONTAINER | D-9 |
| D-8 | HEFTY CINCH SAK | D-10 |
| D-9 | BLACK POLYLINER BAG | D-11 |
| D-10 | APOLLO BAG..... | D-12 |
| D-11 | CONTINGENCY URINE COLLECTION DEVICE..... | D-13 |
| D-12 | SPACEHAB CONTAINER LINER | D-14 |
| D-13 | CARGO TRANSFER BAG..... | D-15 |
| D-14 | IN-FLIGHT STOWAGE RESTRAINT BAG | D-17 |
| D-15 | JETTISON STOWAGE BAG | D-18 |
| F-1 | WASTE LABEL EXAMPLE..... | F-2 |

SSP 50481
Revision B

1.0 INTRODUCTION

1.1 PURPOSE

This document provides a source for constraints, groundrules, International Partner (IP) agreements, and top-level planning applicable to waste management for the entire International Space Station (ISS).

The ISS Program provides accommodations and capabilities for the pre-flight planning, on-orbit operations, and disposal of waste in order to ensure the safety and health of both flight crew and ground operations personnel.

1.2 SCOPE

ISS planning products for waste management will be derived from the contents herein.

1.3 PRECEDENCE

If there are any discrepancies between the information contained in this document and ISS requirements as defined in SSP 50261-01, Generic Groundrules, Requirements, and Constraints Part 1: Strategic and Tactical Planning, and SSP 5410X, Increment Definition and Requirements Document for Planning Period X, those documents take precedence.

1.4 DELEGATION OF AUTHORITY

This document is the responsibility of the Mission Integration and Operations Control Board (MIOCB) and is subject to the ISS Program change control process. This process is defined in SSP 41170, Configuration Management Requirements.

1.5 WAIVER/DEVIATION

The instructions for waiver/deviation are contained in SSP 41170, Sections 3.4.1.7 and 3.4.3.

1.6 ISSUES AND OPEN WORK

Open work is identified by a **<TBD X-X>** in the text. Unresolved issues are identified by a **<TBR X-X>** in the text. Appendix C, Table C-1, captures all of the To Be Determined (TBD) and Table C-2 captures all the To Be Resolved (TBR) items associated with this document. Once the TBD or TBR information is defined and approved, the correct text is inserted in place of the TBD or TBR in the document.

SSP 50481
Revision B

2.0 DOCUMENTS

2.1 APPLICABLE DOCUMENTS

The following documents include specifications, models, standards, guidelines, handbooks, and other special publications. The documents listed in this paragraph are applicable to the extent specified herein. Inclusion of applicable documents herein does not in any way supersede the order of precedence identified in Paragraph 1.3 of this document.

| | |
|----------------|--|
| SSP 30599 | Safety Review Process |
| SSP 41170 | Configuration Management Requirements |
| SSP 50146 | NASA/RSA Bilateral S&MA Process Requirements for ISS, Attachment D - NASA/ROSAVIKOSMOS General Principles and Requirements for ISS Cargo Safety |
| SSP 50200-01 | Station Program Implementation Plan, Volume 1: Station Program Management Plan |
| SSP 50200-02 | Station Program Implementation Plan, Volume 2: Program Planning and Manifesting |
| SSP 50200-03 | Station Program Implementation Plan, Volume 3: Cargo Analytical Integration |
| SSP 50254 | Operations Nomenclature |
| SSP 50261-01 | Generic Groundrules, Requirements, and Constraints Part 1: Strategic and Tactical Planning |
| SSP 50467 | ISS Cargo Stowage Technical Handbook: Pressurized Volume |
| SSP 5410X | Increment Definition and Requirements Document for Planning Period X |
| SSP 5410X-XX | Increment Definition and Requirements Document for Planning Period X, Annex 1: Station Manifest (Series of Annexes of Flight-Specific Station Manifests) |
| NSTS/ISS 13830 | Payload Safety Review and Data Submittal Requirements for Payloads Using the: - Space Shuttle - International Space Station |

SSP 50481
Revision B

| | |
|-------------|--|
| JSC 26895 | Guidelines for Assessing the Toxic Hazard of Spacecraft Chemicals and Test Materials |
| JSC 27260 | Decal Process Document and Catalog |
| JSC 36301 | International Space Station Crew Training Catalog |
| JSC Form 44 | Ionizing Radiation Source Data Sheet - Space Flight Hardware and Applications |
| KHB 1700.7 | Space Shuttle Payload Ground Safety Handbook |
| SSPIA 039 | Memorandum of Agreement Between International Space Station Program and Space Shuttle Program |
| Π32928-103 | Requirements for International Partner Cargo Transported on Russian Progress and Soyuz Vehicles. |

2.2 REFERENCE DOCUMENTS

The following documents contain supplemental information to guide the user in the application of this document. These reference documents may or may not be specifically cited within the text of this document.

| | |
|--------------|---|
| SSP 30233 | Space Station Requirements for Materials and Processes |
| SSP 30575 | Space Station Interior and Exterior Operational Location Coding System |
| SSP 41000 | System Specification for the International Space Station |
| SSP 41161 | Segment Specification for the United States Ground Segment |
| SSP 41162 | Segment Specification for the United States On-Orbit Segment |
| SSP 41163 | Russian Segment Specification |
| SSP 50004 | Ground Support Equipment Design Requirements |
| SSP 50005 | International Space Station Flight Crew Integration Standard (NASA-STD-3000/T) |
| SSP 50007 | Space Station Inventory Management System Bar Code Label Requirements and Specification |
| SSP 50011-01 | Concept of Operation and Utilization Volume I: Principles |
| SSP 50014 | International Space Station Utility Coding Specification |

SSP 50481
Revision B

| | |
|-------------------------------|--|
| SSP 50021 | Safety Requirements Document |
| SSP 50094 | NASA/RSA Joint Specifications Standards Document for the ISS Russian Segment |
| SSP 50146 | NASA/RSA Bilateral S&MA Process Requirements for International Space Station |
| SSP 50200-05 Part 1 | Station Program Implementation Plan, Volume 5: Logistics and Maintenance, Part 1: Maintenance |
| SSP 50200-05 Part 2 | Station Program Implementation Plan, Volume 5: Logistics and Maintenance Part 2: Logistics |
| SSP 50200-06 | Station Program Implementation Plan, Volume 6: Cargo Physical Processing |
| SSP 50260 | International Space Station Medical Operations Requirements Documents (ISS MORD) |
| SSP 50480 | ISS Joint Medical Operations Implementation Plan (JMOIP) |
| SSP 50489 Revision B | ISS Mission Integration Template |
| SSP 50621 | Generic On-Orbit Stowage Capabilities and Requirements: Pressurized Volume |
| SSP 54500 | International Ground System Specification Document |
| SSP 57000 | Pressurized Payloads Interface Requirements Document |
| SSP <TBD 1-1> | ATV Transfer Book |
| NSTS 1700.7B | Safety Policy and Requirements for Payloads Using the Space Transportation System |
| NSTS 1700.7B ISS Addendum | Safety Policy and Requirements for Payloads Using the International Space Station |
| NSTS 07700, Vol II. Book 3 | Program Structure and Responsibilities Book 3 Space Shuttle Program Interface Agreements |
| NSTS 18798 | Interpretations of NSTS/ISS Payload Safety Requirements |
| NSTS 22254 | Methodology for Conduct of Space Shuttle Program Hazard Analyses |

SSP 50481
Revision B

| | |
|------------------|--|
| JSC 28484 | Program Requirements Document for Johnson Space Center Non-critical Government Furnished Equipment |
| KHB 1040.1 | KSC Comprehensive Emergency Preparedness Plan |
| KHB 1710.2 | Kennedy Space Center Safety Practices Handbook |
| KHB 1840.1 | KSC Industrial Hygiene Handbook |
| KHB 1860.1 | KSC Ionizing Radiation Protection Program |
| KHB 1870.1 | KSC Sanitation Handbook |
| KHB 8800.7 | Waste Management Handbook |
| K-SS-09.5.3 | International Space Station Kennedy Space Center Resupply & Return Cargo Ground Processing Plan |
| Π32958-106 | ISS Technical Requirements for Hardware to be Stored or Operated on the ISS Russian Segment |
| OPS-PL-0-008-ESA | Cargo Integration Plan |
| ATV-HB-AI-0001 | ATV Cargo Accommodation Handbook |

SSP 50481
Revision B**3.0 WASTE TYPES, SOURCES AND CLASSIFICATIONS**

The following three sections describe types of waste applicable to ISS, sources of waste on ISS, and waste classifications. Immediately below is an explanation of the two responsible sides involved with waste management. This is given as further clarification to aid in the interpretation of the document.

United States (US) Side and Russian Side:

There are two responsible sides for the purposes of this document and the processes associated with ISS waste disposal. The two sides are US and Russian. All waste management responsibilities of Canadian Space Agency (CSA), European Space Agency (ESA), Japan Aerospace Exploration Agency (JAXA), and National Aeronautics and Space Administration (NASA) are considered the US side. All waste management responsibilities of Federal Space Agency (FSA) are considered the Russian side.

3.1 TYPES OF WASTE

Waste is comprised of crew common waste, hardware waste, payload waste, and launch restraints that are to be removed from the ISS and are not required to be returned for any purpose. Waste shall be accommodated for removal from the ISS on Shuttle and Soyuz transport vehicles or Progress and Automated Transfer Vehicle (ATV) cargo vehicles.

3.1.1 CREW COMMON WASTE

Crew common waste is common to all members of the ISS crew. Crew common waste includes all ISS waste that is generated by the crew. It consists principally of wet/dry used or expired consumables, non-refurbishable crew provisions, hygiene, food and human waste. Crew common waste may be either hazardous or non-hazardous. Each side bears the responsibility for the stowage and disposal of the total wastes proportional to the share of their crewmembers. See Appendix G for list of crew common waste.

3.1.2 HARDWARE WASTE

Hardware Waste includes any used, defective, or expired hardware. Hardware may be replaced at known rates for items with limited life, or after an unexpected failure. Hardware Waste is assigned to the US and Russian side whose hardware or system generated this waste. US and Russia are responsible for the collection, stowage, and disposal of wastes from the use of their modules of the ISS.

3.1.3 PAYLOAD WASTE

Payload waste is defined as all waste that is generated from the performance of a payload experiment. On-board stowage of payload waste will be evaluated on a case-by-case basis. Payload waste is assigned to the US and Russian side whose

SSP 50481
Revision B

payload generated the waste. Each side is responsible for the collection, stowage, and disposal of wastes from their payloads.

3.1.4 LAUNCH RESTRAINT WASTE

Launch restraint waste is considered anything used to secure cargo on an ISS launch vehicle for delivery to or removal from ISS and that is not required on orbit for other planned usage. The US and Russian side whose launch vehicle delivered the launch restraint to the ISS is responsible for the collection, stowage, and disposal of wastes generated.

3.2 SOURCES OF WASTE

Sources of ISS waste include the following:

- A. Flight Crew Equipment (FCE) and crew provisions
- B. Systems and subsystems
- C. Station Development Test Objectives (SDTOs)
- D. Payload hardware and experiments
- E. Flight operations material
- F. Packaging and wrapping material

3.3 WASTE CLASSIFICATIONS

3.3.1 HAZARDOUS WASTE

Hazardous waste is classified for disposal in accordance with the nomenclature defined in Table 3.3-1, Hazardous Waste Classification.

TABLE 3.3-1 HAZARDOUS WASTE CLASSIFICATION

| Waste Category | Class Code | Hazardous Waste Definitions |
|-----------------------|-------------------|---|
| Batteries | BA | All types of batteries (i.e., Ni-Cad, Alkaline). |
| Biological/Biomedical | BB | Any solid or liquid that may present a threat of infection to humans, including non-liquid tissue, body parts, blood, blood products, body fluids, and laboratory wastes that contain human disease-causing agents. Also to include used absorbent material saturated with blood, blood products, body fluids, excretions, or secretions contaminated with visible blood or blood products that have dried. |
| Sharps | SH | Payload and crew-generated needles, syringes, or any intact or broken objects that are capable of puncturing, lacerating, or otherwise penetrating the skin (i.e., glass, scalpels, hard broken plastic, syringes, etc.). |
| Chemical Hazard | CH | Any waste of a solid, liquid, or semi-solid form contaminated with a chemical substance that requires special handling during disposal. |
| Radioactive | RA | Solid, liquid, or gaseous materials that are radioactive or become radioactive and for which there is no further use. |

SSP 50481
Revision B

3.3.2 NONHAZARDOUS WASTE

Non-hazardous waste is any material (wet or dry), determined to be waste that does not meet any of the hazardous waste classifications. For ground handling, non-hazardous waste is that material which has been determined to be waste that does not meet any definitions and/or criteria of regulated wastes under any Federal, State, or local agencies.

3.3.3 TOXIC WASTE

Toxic waste is considered poisonous. The degree of toxicity for any waste which poses a significant health threat to exposed personnel is identified by five categories defined in SSP 50480, ISS Joint Medical Operations Implementation Plan (JMOIP).

SSP 50481
Revision B

4.0 WASTE CONTAINER

Containment versus Container: Containment is the packaging process required by the Safety Review Panel (SRP) to prevent the crew from being exposed to a hazard. A waste container may be certified to hold dry or wet non-hazardous, hazardous waste, urine, or solid waste or a combination of these types. A container does not protect the crew from any hazards. It merely provides a receptacle for the storage and disposal of waste.

Section 4 addresses standard and non-standard waste containers. For standard waste containers, there are three sections describing the usage certification, vehicle certification, and usage rates. Non-standard waste containers are assessed on a case by case basis.

4.1 STANDARD WASTE CONTAINER

Waste container hardware descriptions are located in Appendix B. Standard waste stowage containers have been defined and are made available for on-orbit use and disposal based upon standard waste generation rates. Standard waste containers are manifested by the Rocket Space Corporation - Energia (RSC-E) Cargo Flow Group and the NASA Waste Management Group. The complement of standard waste container hardware accommodates both planned and off-nominal operations.

4.1.1 WASTE CONTAINER USAGE

Table 4.1-1, Waste Container Usage, summarizes the types and general use of current waste hardware. Special handling requirements for hazardous waste are documented in Section 6.1. Crew common waste may be stowed in containers listed in Table 4.1-1. Waste from hardware waste and payloads are evaluated on a case by case basis.

SSP 50481
Revision B

TABLE 4.1-1 WASTE CONTAINER USAGE

| Container | Dry Waste | Wet Waste | Contained Hazardous Waste | Urine | Solid Waste | Primary/Contingency |
|---|-----------|-----------|---------------------------|-------|-------------|---------------------|
| KBO-M (11φ615.8715-0A15-01) | X | X | X(1) | | | P |
| RLB (for KBO-M packing) (11φ615.8716-20A15) | X | X | X | | | P |
| KTO (11φ615.8720A55-0) (2) | | | | | X | P |
| EDV (11φ615.8711-0A15-1) (2) | | | | X | | P |
| Food Waste Bag (11φ615.8716-0A15) | X | X | | | | P |
| Crumb Bag (11φ615.8717-0A15) | X | | | | | P |
| General Use Sharps Container (KLSH320043-302) | | | X(5) | | | P |
| Hefty Cinch Saks (SLZ33112284-001) (4) | X | | X | | | C |
| Black Polyliner Bags (SLZ33112285-001) (4) | X | | X | | | C |
| Apollo Bag (10108-10045-01) | | | | | X | C(3) |
| CUCD (10108-10076-05) | | | | X | | C(3) |
| SHCL (SEZ33114033-301) | X | X | | | | C |
| CTB, HALF-SIZE (P/N SEG33111836) | X | | | | | C |
| CTB, FULL SIZE W/O WINDOWS (P/N SEG33111838) | X | | | | | C |
| CTB, FULL SIZE WITH WINDOWS (P/N SEG33111837) | X | | | | | C |
| CTB, DOUBLE SIZE (P/N SEG33111839) | X | | | | | C |
| CTB, TRIPLE-SIZE (P/N SEG33111840) | X | | | | | C |
| In-flight Stowage Restraint Bag (10108-10075-03) | X | | | | | C |
| JSB, (SEB 13100134-304) | X | | | | | C |

NOTES:

- (1) Only for properly contained biological/biomedical materials (absorbent materials saturated with blood or its products and nasal secretions), batteries and sharps.
- (2) Part numbers for the EDV and KTO reflect the complete assembly (EDV buckets and cover; KTO bottoms and case).
- (3) To be used only in US segment due to lack of certification for use in the RS.
- (4) Black polyliner bags and Hefty Cinch Saks must be contained within non-flammable bags and must not contain sharp hazardous materials.
- (5) Will contain sharps that are crew or experiment generated.

C = Contingency
P = Primary

SSP 50481
Revision B

4.1.2 WASTE HARDWARE CONTAINER CERTIFICATION

Table 4.1-2, Waste Container Vehicle Certification, lists the certification status of the current hardware for launch and return in the available ISS transportation vehicles and cargo carriers.

TABLE 4.1-2 WASTE CONTAINER VEHICLE CERTIFICATION

| Container | Launch | Disposal |
|--|-----------------|--------------------------------|
| KBO-M (11Φ615.8715-0A15-01) | M, P, MD, Sz | A, M, P, MD, Sz (1) |
| RLB (for KBO-M packing) (11Φ615.8716-20A15) | M, P, MD, Sz | A, M, P, MD, Sz |
| KTO (11Φ615.8720A55-0) | M, P, MD, Sz | A, M, P, MD, Sz |
| EDV (11Φ615.8711-0A15-1) | M, P, MD, Sz | A, M, P, Sz |
| Food Waste Bag (11Φ615.8716-0A15) | M, P, MD, Sz | P, Sz, A, Internal to KBO-M |
| Crumb Bag (11Φ615.8717-0A15) | M, P, MD, Sz | Internal to KBO-M |
| General Use Sharps Container (KLSH320043-302) | M, MD | A, M, P, MD, Sz |
| Hefty Cinch Saks (SLZ33112284-001) | M, P, MD | A, M, P, MD |
| Black Polyliner Bags (SLZ33112285-001) | M, P, MD | A, M, P, MD |
| Apollo Bag (10108-10045-01) | M, MD | A, M, MD |
| CUCD (10108-10076-05) | M, MD | A, M, MD |
| SHCL (SEZ33114033-301) | M, MD | A, M, MD |
| CTB, Half-Size (P/N SEG33111836) | A, M, P, MD, Sz | A, M, P, MD |
| CTB, Full Size w/o Windows (P/N SEG33111838) | A, M, P, MD, Sz | A, M, P, MD |
| CTB, Full Size with Windows (P/N SEG33111837) | A, M, P, MD, Sz | A, M, P, MD |
| CTB, Double Size (P/N SEG33111839) | A, M, MD | A, M, MD |
| CTB, Triple-Size (P/N SEG33111840) | A, M, MD | A, M, MD |
| In-flight Stowage Restraint Bag (10108-10075-03) | M, P, MD, Sz | A, M, P, MD, Sz |
| JSB (SEB 13100134-304) | M, P, MD, Sz | A, M, P, MD, Sz |

NOTES:

A = ATV

M = MPLM

MD = Shuttle Middeck

P = Progress

Sz = Soyuz

(1) KBO-M return on the Shuttle in either M-bags or CTB only or confined within an RSR locker.

SSP 50481
Revision B

4.1.3 CREW COMMON WASTE CONTAINER USAGE RATE ESTIMATE

Table 4.1-3, Usage Rates for Crew Common Waste Containers, shows planning data for primary use of waste containers.

TABLE 4.1-3 USAGE RATES FOR CREW COMMON WASTE CONTAINERS

| Container | Consumption Rate (Man Days) |
|---|--------------------------------|
| *KBO-M (11φ615.8715-0A15-01) | 10 |
| Food Waste Bag (11φ615.8716-0A15) | 1.5 |
| **EDV (11φ615.8711-0A15-1) | 12 |
| KTO (11φ615.8720A55-0) | 20 |
| General Use Sharps Container (KLSH320043-302) | 540 |

* Historical consumption rate is 24 man days.

** EDVs can be reused after they are emptied for a time period of up to 90 days of waste contact time.

4.2 NON-STANDARD WASTE CONTAINERS

Waste that is not accommodated by standard waste containers, due to size, shape, etc. is contained in special handling hardware. This hardware is provided by the system/payload organization responsible for the system/payload that generates the waste. These containers are included within the allocation provided to the system/payload by the ISS Program. These containers may be incorporated into the standard ISS complement of available waste hardware if it is determined that there might be a need for this type of container by future users. All non-standard waste containers should be certified for disposal on any available vehicle.

SSP 50481
Revision B

5.0 WASTE MANAGEMENT RESPONSIBILITIES

Waste management responsibilities are spread among multiple disciplines and organizations. This section describes four areas of waste management responsibility.

5.1 WASTE CONTAINERS, SAFETY AND HANDLING

5.1.1 WASTE CONTAINERS

Hardware and payload providers are responsible for estimating the mass/volume of their waste and verifying that the waste they generate is accommodated by the crew common waste containers.

If a new container is required, the hardware/payload provider has the responsibility to ensure that unique containers are certified for use in the ISS and disposal on any vehicle. They must also ensure that sufficient quantities are fabricated to support training and qualification needs and delivered in time for bench reviews.

Requirements for new US-developed hardware and modifications to existing containers are presented to the MIOCB for concurrence. Upon approval, the Trash/Waste Integration Group (TWIG) presents requests for new hardware development to the Vehicle Control Board (VCB). Approval and funding for hardware design and development is determined by the VCB. Project management oversight is performed by the Systems Integration Office.

5.1.2 FLIGHT SAFETY

The hardware providers are responsible for the safe containment, storage, and disposal of hazardous waste in accordance with the following Program safety and certification requirements: SSP 50146, NASA/RSA Bilateral S&MA Process Requirement for ISS, Attachment D - NASA/ROSAVIKOSMOS General Principles and Requirements for ISS Cargo Safety (for Russian Transport Vehicles); SSP 50021, Safety Requirements Document; NSTS 1700.7B, Safety Policy and Requirements for Payloads Using the Space Transportation System; and NSTS 1700.7B ISS Addendum, Safety Policy and Requirements for Payloads Using the International Space Station. The hardware provider must develop and present the required safety documentation in accordance with SSP 30599, Safety Review Process, to the relevant forums: SRP, Payload Safety Review Panel (PSRP), Safety and Mission Assurance Review Team (SMART), Joint American-Russian Safety Working Group (JARSWG) and RSC-E Safety Panel (for hardware located in Russian elements or vehicles) for approval. In addition, the hardware provider must supply specific safety certification data as required by the Waste Management Request (WMR), described in Section 5.4.4 for all waste items.

SSP 50481
Revision B**5.1.3 GROUND SAFETY**

Ground safety reviews are conducted to protect personnel, facilities, equipment, other payloads, the Shuttle, the flight crew, the general public, public and private property, and the environment from injury or damage during ground processing operations of waste. The Ground Safety Review Panel (GSRP) evaluates the design of Ground Support Equipment (GSE) and the ground processing operations performed in accordance with KHB 1700.7, Space Shuttle Payload Ground Safety Handbook. Ground SDPs are submitted by the payload/system hardware developers for the GSRP review in accordance with NSTS/ISS 13830, Payload Safety Review and Data Submittal Requirements for Payloads Using the Space Shuttle/International Space Station, or SSP 30599, Safety Review Process.

5.1.4 WASTE HANDLING

The US system managers and Payload Developers (PD) are responsible for providing waste handling procedures. The TWIG, together with the RSC-E Cargo Flow Group, are responsible for integrating these waste handling requirements and providing them to the Mission Control Center (MCC). The system manager(s) or payload developer(s) support the appropriate Mission Operations Directorate (MOD) representative in developing waste handling procedures, timeline requirements, and training and operational documentation for mission-specific and system-unique or payload-unique cases.

Kennedy Space Center (KSC) Waste Processing Team representatives are responsible for developing Shuttle ground handling procedures in compliance with US federal, state and local guidelines.

Russian payload specialists submit waste handling requirements to the RSC-E Cargo Flow Group to dispose of waste resulting from experiments.

5.2 WASTE ALLOCATION/STOWAGE**5.2.1 ALLOCATION**

Allocations for on-orbit stowage of US waste and waste consumables are established by the Requirements Integration Panel (RIP). Allocations for payloads, including payload waste, are defined in the Increment Definition and Requirements Document (IDRD), SPP 5410X.

Hardware providers/payload managers are responsible for ensuring that their allocations include waste stowage and waste stowage hardware.

A standard stowage volume for waste shall be specified and documented for each increment. The standard waste stowage volume shall comply with habitability stowage constraints as defined in SSP 50261-01. The required volume shall be based on intervals between logistics vehicle undockings according to the assembly sequence,

SSP 50481
Revision B

and the specific crew size. The total waste generation will be temporarily stowed within the ISS habitable volume and remain within the allocation. This volume will be as far from the primary crew living and working locations as practical, and must not be used for the nominal stowage of other items.

5.2.2 ON-ORBIT STOWAGE INTEGRATION

The Stowage Integration Working Group (SIWG) utilizes waste estimates in its planning process and factors in “actual” waste disposal volumes in the overall on-orbit stowage integration process. The SIWG periodically provides waste candidate recommendations to the TWIG, in an effort to manage ISS on-orbit stowage.

5.3 CREW TRAINING

JSC 36301, International Space Station Crew Training Catalog, defines overall crew training. The “ISS Habitability Equipment and Procedures 21105” class reviews all waste hardware and operational constraints. It is provided to Expedition crews by MOD Crew Systems. The Crew Systems group coordinates with the TWIG to ensure that the latest data is provided to the crew. The Systems Integration Office provides the hardware for use in the class.

The Gagarin Cosmonaut Training Center (GCTC) provides training to the Expedition crew for Russian-supplied hardware and disposal on Progress and Soyuz. A refresher is provided, as required, when significant changes have occurred. ESA provides training for the disposal of waste on ATV at the European Astronaut Center (EAC).

Payload developers with unique waste hardware provide training within their payload training sessions for those unique items.

5.4 INCREMENT DISPOSAL PLANNING**5.4.1 ASSESSMENT**

The TWIG, together with the RSC-E Cargo Flow Group, performs an assessment of waste container usage and then manifests additional waste containers as necessary to ensure an adequate supply is available to satisfy on-orbit needs. The assessment is updated as required based on real-time data collected by the operations teams in the MCC (Mission Control Center - Houston (MCC-H) and Mission Control Center - Moscow (MCC-M)).

For US hardware, the TWIG presents requests for hardware fabrication to the FCE Control Board if the hardware is not available in ground inventory. US supplied contingency waste container hardware is manifested on an as needed basis.

The Manifest Requests (MR) of all waste containers to be used on-orbit are coordinated by the TWIG to ensure optimal use of available hardware. The TWIG develops and submits a MR for launch of US hardware. The RSC-E Cargo Flow Group develops and

SSP 50481
Revision B

submits manifest inputs for Russian hardware. The US Manifest Group is responsible for generating a MR based on the Russian manifest input.

Waste container hardware required for the ISS is manifested in the IDRD Annex 1, SSP 5410X-XX, Increment Definition and Requirements Document for Planning Period X, Annex 1: Station Manifest (Series of Annexes of Flight-Specific Station Manifests), in accordance with SSP 50200-02, Station Program Implementation Plan, Volume 2: Program Planning and Manifesting.

The combination of US hardware, Russian hardware and crew common waste is determined for the purpose of identifying the appropriate transport vehicle for its disposal. The TWIG coordinates all requests to dispose US hardware waste. The RSC-E Cargo Flow Group coordinates all requests to dispose Russian hardware waste. The disposal of crew common waste is determined jointly between US and Russia.

5.4.2 FLIGHT READINESS

The TWIG assesses the integrated waste assessments as a requirement for certification for flight and stage readiness and will report results to the Mission Integration and Operations Office.

5.4.3 INCREMENT DEFINITION AND REQUIREMENTS DOCUMENT

The TWIG provides a pre-flight input, coordinated with the RSC-E Cargo Flow Group, to each IDRD (SSP 5410X), relating to waste disposal on various vehicles. This input will be based on the assessments of waste generation, allocation, and vehicle capability. The post-flight actual disposal list will be documented in the IDRD Annex 1 for each vehicle.

5.4.4 WASTE IDENTIFICATION

For the TWIG to develop a plan for waste management, data from hardware and payload providers must be submitted via a WMR. Data required on the WMR includes mass, volume, part identifiers, and safety certification information. WMRs are available through the Management Information Database Automation System (MIDAS) suite of applications located at web address http://iss-www.jsc.nasa.gov:1532/midasagnt/plsql/midas_home_oas.

For Russian hardware to be disposed on Shuttle or ATV, Russia shall provide the US side with the same data.

The data provided on the WMR as well as the data received from the Russian side will be used to determine what will be disposed on Progress, ATV, Shuttle, or Soyuz. See Section 7 for vehicle specific processes.

SSP 50481
Revision B

5.4.5 JOINT WASTE MANAGEMENT TELECON

The TWIG conducts a bi-monthly telecon with the RSC-E Cargo Flow Group to discuss on-going waste assessments and analysis. This forum is used to exchange information, discuss and approve planning documentation, and answer questions between US and Russian waste management specialists. Telecons will be conducted with ESA Cargo Integration Group for any planning and discussion that affects ATV.

5.4.6 POST INCREMENT CREW DEBRIEF

The TWIG participates in the debrief activities of each increment crew to obtain information that will help planning subsequent increments. Crew concerns and lessons learned will be coordinated with RSC-E and ESA.

SSP 50481
Revision B**6.0 ON-ORBIT PROCESSES**

The following section describes on-orbit waste processes by addressing the three major components that are involved. Various aspects of containment, handling and labeling are described in Section 6.1. This is followed by stowage aspects in Section 6.2. Section 6.3 involves periodic statuses.

6.1 WASTE CONTAINMENT, HANDLING AND LABELING

The following six sections describe the containment, handling, and labeling requirements for battery, biological/biomedical, sharps, chemical, radioactive, and non-hazardous waste.

All waste containers disposed on the Shuttle require a label identifying the waste type. Labels will be visible on the outermost container and be marked in accordance with the example shown in Appendix D. Waste containers disposed on expendable vehicles do not require labels.

6.1.1 BATTERY WASTE

Crewmembers will inspect batteries for damage prior to disposal in a ziplock bag. If damaged, batteries will have both terminals taped. All 9 Volt (V) batteries will have both terminals taped.

6.1.2 BIOLOGICAL/BIOMEDICAL WASTE

Biological/Biomedical waste must first be sealed in a ziplock bag, and then contained in a Soft Trash Bag (KBO-M) (Russian Segment (RS) Soft trash bag, 11Φ615.8715-0A15-01).

6.1.3 SHARPS WASTE

All sharps waste is placed in an approved sharps container for disposal. Sharps containers must be puncture resistant, leak proof, and sealable.

6.1.4 CHEMICAL WASTE

Individual chemical waste types (based on chemical properties and not on hazard levels) must be stowed for disposal in separate sealable waste containers. A second level of containment may be required on each chemical waste container when attempting to stow multiple chemical waste containers in the same larger size container; unless the appropriate safety review panel certifies that multiple chemical waste containers are compatible when stored in proximity to one another.

SSP 50481
Revision B**6.1.5 RADIOACTIVE WASTE**

Radioactive waste is packaged, labeled, and handled in accordance with requirements established by the KSC Radiation Protection Officer/Johnson Space Center (JSC) Radiation Health Office and approved by the appropriate safety review panel. An assessment for these hazards will be made on a case-by-case basis.

The NASA Chief Radiation Safety Officer must evaluate any waste that is identified as a radiation emitter prior to disposal on an expendable vehicle. For US hardware/payloads, JSC Form 44, Ionizing Radiation Source Data Sheet - Space Flight Hardware and Applications, is required to be submitted in order to define radioactive material and procedures (labeling, isolation, removal, etc.). This form is part of the Safety Data Pack.

According to the Nuclear Regulatory Commission (NRC), the container for urine may be disposed if the effluent concentration of the radioactive waste does not exceed the concentration provided by NRC. The limiting concentration varies from 10^{-6} to 10^{-3} Curie (Ci)/milliliter (ml), depending on the type of the radioactive material, where 1 Ci is equal to 3.7×10^{10} disintegrations per second. The waste can be burned once the effluent concentration is below the limit.

Disposal of radioactive waste on Progress or ATV will be evaluated on a case-by-case basis.

6.1.6 NON-HAZARDOUS WASTE

There are no special on-orbit handling requirements for non-hazardous waste.

6.2 STOWAGE**6.2.1 WASTE STOWAGE LOCATIONS**

A limited amount of waste can be re-stowed into volumes from which the hardware/consumables were removed.

In order to maintain a hygienic environment, waste and associated by-products should not be left onboard longer than necessary. Waste should not be stowed in the principle crew living and working areas as defined in SSP 50261-01.

The on-orbit Stowage Integration Working Group is responsible for stowage of filled waste hardware. The Service Module (SM) Transfer Chamber may be used for stowage of waste, especially the Container for Water/Urine (EDV) and KTO. A stowage volume of 10 Cargo Transfer Bag Equivalent (CTBE) is allocated in the US segment. This location is at crew discretion.

SSP 50481
Revision B**6.2.2 UNUSED WASTE HARDWARE STOWAGE LOCATION**

Used waste hardware stowage should not be stowed next to food, clothing, hygiene, medical consumables, or medical equipment.

6.3 PERIODIC STATUS TO GROUND

The Increment Management Center (IMC) will obtain a status from the crew on waste hardware and real-time waste generation. This is supplied to the US TWIG co-chair for incorporation into Cargo Flow waste management assessments. In addition, this will assist the Waste Management group's ability to ensure that an adequate supply of waste containers are onboard. Typically, these waste status requests will occur on a monthly basis, but can occur at greater or lesser intervals as required by the Program.

6.4 LABELING

Waste containers disposed on expendable vehicles do not require labels.

All waste containers disposed on the Shuttle require a label identifying the waste type.

A waste label is provided for use on waste containers. This label may be affixed to the containers via adhesive or tied with string (provided with these labels), depending on the container. The Expedition crew will select the most appropriate method. An example of the label is provided in Appendix F. The official version will be located in JSC 27260, Decal Process Document and Catalog.

Bags should not be transferred to the Shuttle without prior verification that this label is attached. This will be accomplished by comments on the transfer cue cards. It is also important for purposes of safe ground handling that this label is marked accurately and completely.

Labeling standards for items on orbit are covered in SSP 50094, NASA/RSA Joint Specifications Standards Document for the ISS Russian Segment.

6.4.1 NON-HAZARDOUS WASTE LABELING

For non-hazardous waste, the waste label identifies wet or dry status.

6.4.2 HAZARDOUS WASTE LABELING

For hazardous waste, the waste label on the outermost containment barrier shall identify all battery (BA) hazards, biological/biomedical (BB) hazards, sharp (SH) hazards, chemical (CH) hazards, and/or radioactive (RA) hazards. Chemical hazards are identified by circling the chemical logo on the label and by indicating the payload or system that the chemical waste came from. Radiation hazards are identified by circling the radiation logo on the label and by annotating the isotope and date that the radiation hazard was produced.

SSP 50481
Revision B

The containment packaging and labels are provided by the System/Payload Developer and stored with their hardware.

6.4.3 TOXICITY IDENTIFICATION

When multiple types of hazardous waste are accumulated in a single hazardous waste container, the outermost container label shall indicate the highest level of toxicity contained (0-4).

SSP 50481
Revision B**7.0 WASTE DISPOSAL PLANNING**

All waste is removed from ISS via return or expendable vehicles, the Space Shuttle in Multi-Purpose Logistics Module (MPLM), Spacehab or Middeck), Soyuz or the Progress. The following section defines waste disposal priorities, manifest planning for waste disposal, and vehicle constraints or requirements.

7.1 PRIORITIZATION FOR REMOVAL

In order to minimize the quantity of hazardous waste on ISS, the nominal priority for removal of waste is as follows:

- 1) Hazardous waste
- 2) Urine (e.g., EDV)
- 3) Solid human waste (e.g., KTOs)
- 4) Wet non-hazardous waste
- 5) Dry non-hazardous waste

7.2 DOWN MANIFEST PLANNING

All items being disposed are manifested on a specific return or expendable vehicle.

The initial step in this process is the identification of waste to be disposed. The TWIG and the RSC-E Cargo Flow Group jointly agree to the quantity of crew-common waste available for disposal. Russia and the US are each responsible for the disposal of 50 percent of crew common waste. Additionally, each side is responsible for their own payload and hardware waste. Use of expendable vehicles is preferred by the ISS Program for waste disposal. Crew common waste can be disposed on any vehicle (Soyuz, Progress, Shuttle, or ATV) in any of the primary or contingency waste containers as defined in Table 4.1-1. The use of Russian provided containers by the US side for disposal of crew common waste is negotiated by separate agreement. In addition, compensation for disposal of crew common waste above the 50% limit is also negotiated by separate agreements.

7.3 UNITED STATES WASTE DISPOSAL ON RUSSIAN VEHICLES

General information and requirements on the Progress/Soyuz vehicles, as well as cargo integration schedules and milestones are provided in document П32928-103, Requirements for International Partner Cargo Transported on Russian Progress and Soyuz Vehicles. To facilitate the waste integration process on the Progress and Soyuz vehicles, the US side should submit a request to RSC-E to include the waste in the manifest no later than six weeks before vehicle undocking. The official schedule is documented in SSP 50489, ISS Mission Integration Template, Revision B. The possibility of disposing of US wastes on the Progress/Soyuz is determined by the results of a review of the dimensional installation drawings and safety data.

SSP 50481
Revision B

The Russian Safety Group coordinates with US Safety as required during the process of review of the safety of waste hardware for disposal on Progress/Soyuz vehicles.

7.3.1 PROGRESS WASTE DISPOSAL

The Progress vehicle is one of the primary means of removing waste from the ISS.

Waste may be accommodated in the Progress cargo compartment and in the Rodnik system tanks (for the Progress-M vehicles only). In the Rodnik system tanks, only liquid waste may be stowed. Waste stowed in the cargo compartment must be firmly secured to prevent movement inside the Progress cargo compartment.

A volume of approximately 6 cubic meters (m^3) is available in the cargo compartment for waste stowage. The Rodnik tanks have approximately 420 liters of liquid waste stowage volume available. Therefore, assessments assume up to 19 EDVs may be dumped into these Rodnik tanks and reused.

The total mass of waste to be removed depends on the propellant margin in the vehicle propulsion system tanks, the vehicle constraints associated with mass properties and the vehicle flight plan after undocking from the ISS. In the cargo compartment, the mass can be as much as 1700 kilograms (kg).

7.3.2 SOYUZ WASTE DISPOSAL

A volume of approximately 1 m^3 is available in the Soyuz orbital module for waste stowage with the mass of all waste to be disposed not exceeding 100 kg.

Tanks with liquid that are stowed in the Soyuz orbital module should remain sealed during orbital module depressurization. Orbital module depressurization occurs prior to separation from the Descent module.

7.4 SHUTTLE WASTE DISPOSAL

SSPIA 039, Memorandum of Agreement Between the International Space Station Program and Space Shuttle Program, is an agreement to return waste on the Shuttle. Any waste that is transported to the ground must be properly contained and labeled to ensure safe conditions for ground handling. Transfer cue cards are used to instruct the crew that labels are required.

MR for Shuttle waste disposal should be submitted in adequate time to support the mission integration schedule. For Shuttle launch and return, the MR is due to the Manifest Working Group (MWG) for the baseline manifest at launch minus (L-)15 months. The first US flight specific manifest is baselined at the L-12 months. Updates occur through launch via MR. Real-time updates occur via the CHIT process. The MR/CHIT will include unique stowage/packaging requirements. MR's are incorporated into the IDRD Annex 1, SSP 5410X-XX.

SSP 50481
Revision B

The KSC/GSRP is provided data for waste containers that may be disposed of via the Shuttle (MPLM, middeck). For disposal via the Shuttle, the MPLM, if available, is preferable over middeck.

The Russian Safety Group coordinates Russian waste disposal with the Mission Evaluation Room (MER) Safety Console as required for Russian waste to obtain safety approval of waste hardware disposed in the Shuttle middeck, Spacehab, or MPLM.

KSC uses standard ground handling procedures for unloading and disposing of ISS waste. The KSC Ground Processing Team will be prepared to handle any anomalous conditions which may occur during waste deintegration and transport.

Waste is transferred to the KSC Waste Ground Processing Team for disposal. Containers labeled as non-hazardous wet or dry shall not be opened. Containers identified as containing hazardous waste will be opened for the purpose of sorting per waste category. The disposal of all waste will follow US federal, state and local guidelines.

7.5 AUTOMATED TRANSFER VEHICLE WASTE DISPOSAL

The ATV is one of the primary means of removing waste from the ISS. General information on the ATV and the requirements levied against documentation to be submitted are contained in OPS-PL-0-008-ESA, Cargo Integration Plan. To facilitate the waste integration process on ATV, the TWIG will submit return manifest data to ESA ATV Cargo Integration Group per schedule contained in SSP 50489 Revision B.

Before final stowage of waste on the ATV, equipment stowed in the cargo compartment that must be disassembled and/or relocated to ISS will be documented in the ATV Operations Data File (ODF), unless there is a vehicle redocking requirement.

Liquid waste may be accommodated in the ATV Integrated Cargo Carrier (ICC) within the wastewater tanks. Waste stowed in the ATV cargo compartment must be firmly secured to prevent movement. SSP <**TBD 1-1**>, ATV Transfer Book, will contain waste stowage recommendations.

A volume of approximately 10.5 m³ and up to 5,500 kgs of pressurized dry cargo space is available in the cargo compartment for waste stowage. The wastewater tanks have about 840 liters of liquid waste stowage volume available. Therefore, assessments assume the contents of up to 38 EDV's may be dumped into these tanks and reused.

The total mass of waste to be removed depends upon the propellant margin in the vehicle propulsion system tanks, the vehicle constraints associated with mass properties, and the vehicle flight plan after undocking from the ISS.

SSP 50481
Revision B

APPENDIX A

ACRONYMS AND ABBREVIATIONS

SSP 50481
Revision B

APPENDIX A - ACRONYMS AND ABBREVIATIONS

| | |
|-----------------|--|
| ATV | Automated Transfer Vehicle |
| ASSY | Assembly |
| BA | Battery |
| BB | Biological/Biomedical |
| CH | Chemical |
| Ci | Curie |
| CIO | Cargo Integration Officer |
| cm | centimeter |
| cm ³ | cubic centimeter |
| CPWG | Crew Provisioning Working Group |
| CSA | Canadian Space Agency |
| CTB | Cargo Transfer Bay |
| CTBE | Cargo Transfer Bag Equivalent |
| CUCD | Contingency Urine Collection Device |
| EAC | European Astronaut Center |
| EDV | Container for Water/Urine |
| ESA | European Space Agency |
| EVA | Extravehicular Activity |
| FEP | Fluorinated Ethylene Propylene |
| FSA | Federal Space Agency |
| ft | foot |
| ft ³ | Cubic Feet |
| GCTC | Gagarin Cosmonaut Training Center |
| GFE | Government Furnished Equipment |
| GSE | Ground Support Equipment |
| GSRP | Ground Safety Review Panel |
| ICC | Integrated Cargo Carrier |
| IDRD | Increment Definition and Requirements Document |
| IMC | Increment Management Center |
| IMT | Increment Management Team |
| in. | Inch |
| IP | International Partner |
| ISO | Inventory Stowage Officer |
| ISS | International Space Station |
| JARSWG | Joint American-Russian Safety Working Group |
| JAXA | Japan Aerospace Exploration Agency |
| JMOIP | Joint Medical Operations Implementation Plan |

SSP 50481
Revision B

| | |
|----------------|---|
| JSB | Jettison Stowage Bag |
| JSC | Johnson Space Center |
| KBO-M | Soft Trash Bag |
| kg | Kilogram |
| KSC | Kennedy Space Center |
| KTO | Solid Waste Container |
| L- | Launch minus |
| lb | Pound(s) |
| LPT | Launch Package Team |
| m ³ | cubic meter |
| MAX | Maximum |
| MCC | Mission Control Center |
| MCC-H | Mission Control Center - Houston |
| MCC-M | Mission Control Center - Moscow |
| MER | Mission Evaluation Room |
| MIDAS | Management Information Database Automation System |
| MIOCB | Mission Integration and Operations Control Board |
| ml | milliliter |
| mm | Millimeter |
| MOD | Mission Operations Directorate |
| MPLM | Multi-Purpose Logistics Module |
| MR | Manifest Request |
| MWG | Manifest Working Group |
| NASA | National Aeronautics and Space Administration |
| NRC | Nuclear Regulatory Commission |
| ODF | Operations Data File |
| OPS NOM | Operation Nomenclature |
| P/N | Part Number |
| PD | Payload Developer |
| PSRP | Payload Safety Review Panel |
| RA | Radioactive |
| RIP | Requirements Integration Panel |
| RLB | Rubber Lined Bag |
| RS | Russian Segment |
| RSA | Russian Space Agency |
| RSC-E | Rocket Space Corporation - Energia |
| RSP | Resupply Stowage Platform |
| RSR | Resupply Stowage Rack |
| S&MA | Safety and Mission Assurance |
| SDP | Safety Data Packages |

SSP 50481
Revision B

| | |
|-------|--|
| SDTO | Station Development Test Objective |
| SEB | Source Evaluation Board |
| SH | Sharp |
| SHCL | Spacehab Trash Container Liner |
| SIWG | Stowage Integration Working Group |
| SM | Service Module |
| SMART | Safety and Mission Assurance Review Team |
| SRP | Safety Review Panel |
| SSCB | Space Station Control Board |
| SSP | Space Shuttle Program |
| SSPCB | Space Station Program Control Board |
| STD | Standard |
| TBD | To Be Determined |
| TBR | To Be Resolved |
| TWIG | Trash/Waste Integration Group |
| US | United States |
| V | Volt |
| VCB | Vehicle Control Board |
| WMR | Waste Manifest Request |

SSP 50481
Revision B

APPENDIX B
GLOSSARY OF TERMS
<RESERVED>

SSP 50481
Revision B

APPENDIX B - GLOSSARY OF TERMS <RESERVED>

SSP 50481
Revision B

APPENDIX C

OPEN WORK

SSP 50481
Revision B

APPENDIX C - OPEN WORK

Table C-1 lists the specific TBD items in the document that are not yet known. The TBD is inserted as a placeholder wherever the required data is needed and is formatted in bold type within brackets. The TBD item is numbered based on the section where the first occurrence of the item is located as the first digit and a consecutive number as the second digit (i.e., **<TBD 4-1>** is the first undetermined item assigned in Section 4 of the document). As each TBD is solved, the updated text is inserted in each place that the TBD appears in the document and the item is removed from this table. As new TBD items are assigned, they will be added to this list in accordance with the above described numbering scheme. Original TBDs will not be renumbered.

TABLE C-1 TO BE DETERMINED ITEMS

| TBD | Section | Description |
|------------|----------------|---|
| 1-1 | 2.2, 7.54 | ESA waste management teams will provide document number closer to ATV launch. |
| A-1 | Appendix A | To be provided by book manager. |
| E-1 | Appendix E | ESA waste management teams will be established closer to ATV launch. |
| G-1 | Appendix G | Waste Management (NASA and RSC-E) will create Appendix. |

Table C-2 lists the specific TBR issues in the document that are not yet known. The TBR is inserted as a placeholder wherever the required data is needed and is formatted in bold type within brackets. The TBR issue is numbered based on the section where the first occurrence of the issue is located as the first digit and a consecutive number as the second digit (i.e., **<TBR 4-1>** is the first unresolved issue assigned in Section 4 of the document). As each TBR is resolved, the updated text is inserted in each place that the TBR appears in the document and the issue is removed from this table. As new TBR issues are assigned, they will be added to this list in accordance with the above described numbering scheme. Original TBRs will not be renumbered.

TABLE C-2 TO BE RESOLVED ISSUES

| TBR | Section | Description |
|------------|----------------|--------------------|
| | | |

SSP 50481
Revision B

APPENDIX D

WASTE HARDWARE DESCRIPTION

SSP 50481
Revision B**APPENDIX D - WASTE HARDWARE DESCRIPTION**

The waste hardware descriptions provide details for all waste containers available for use on the ISS. These descriptions contain data for users to identify hardware for use by a system/subsystem or payload and facilitate the manifesting process. The hardware descriptions are organized as follows:

A. Russian Supplied Hardware

1. Prime
 - a. KBO-M
 - b. Rubber Lined Bag (RLB)
 - c. KTO
 - d. EDV
 - e. Food Waste Bag
2. Contingency
 - a. Crumb Bag

B. US Supplied Hardware

1. Prime
 - a. General Use Sharps Container
2. Contingency
 - a. Hefty Cinch Sak
 - b. Black Polyliner Bag
 - c. Apollo Bag
 - d. Contingency Urine Collection Device (CUCD)
 - e. Spacehab Trash Container Liner (SHCL)
 - f. Cargo Transfer Bag (CTB), Half-size
 - g. CTB, Full-size without windows
 - h. CTB, Full-size with windows
 - i. CTB, Double size
 - j. CTB, Triple size
 - k. In-flight Stowage Restraint Bag
 - l. Jettison Stowage Bag

SSP 50481
Revision B



| | |
|--|--|
| OPS NOM: Soft Trash Bag (KBO-M) Контейнер для бытовых отходов мягкий (КБО-М) | ASSY P/N: 11 φ 615.8715-OA15-01 |
| Description: The KBO-M has a metal band around the top and rubber flaps to keep the trash inside. This bag can be used for wet or dry trash and can contain hazardous waste. | Material: Heavy duty rubberized cloth |
| Dimensions (Launch): 11.75 in. x 11.75 in. x 2 in. / 29.8 cm x 29.8 cm x 5.1 cm | Dimensions (In Use/Full): 17 in. height x 11.5 diameter / 43.18 cm height x 29.21 cm diameter |
| Usable Volume: 0.549 CTBE / 28914.7 cm ³ | UNIT MASS Empty: 1.759 lbs / 0.798 kg |
| Unit Mass (STD/Full): 17.637 lbs / 8 kg | Special Requirements (Yes/No): No |
| Assembly Required: No | Limited Life: No |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: Yes - (batteries, sharps containers, blood, and nasal secretions) |
| Launch Stowage Method: In RLB; nominally launched 1:1 | Progress Removal Stowage Method: Attached via string to Progress internal structure |
| MPLM Removal Stowage Method: Inside either RSR locker or CTB if on RSP | Middeck Removal Stowage Method: N/A |

FIGURE D-1 SOFT TRASH CONTAINER


SSP 50481
Revision B



| | |
|---|---|
| OPS NOM: Rubber Lined Bag Пакет для отходов | ASSY P/N: 11φ615.8716-20A15 |
| Description: It can contain up to 3 full KBO-M bags or approximately 8 table bags. It has a draw string closure and is nominally closed tighter with the rubber ties known as "szkoo'tee". It should be wiped down before reuse. The crew prefers this bag for wet trash. | Material: Rubberized cloth. Not as heavy duty as the KBO-M, but larger |
| Dimensions (Launch): 29.8 cm x 29.8 cm x 5.6 cm / 11.75 in. x 11.75 in. x 2.2 in. (folded around KBO-M) | Dimensions (In Use/Full): Approximately 25 in. height x 15 in. width / 63.5 cm height x 38.1 cm width |
| Usable Volume: ~ 1.37 CTBE / 72207.96 cm ³ | Unit Mass (Empty): 0.661 lbs / 0.3 kg |
| Unit Mass (STD/Full): 23.7 lbs / 10.75 kg | Special Requirements (Yes/No): No |
| Assembly Required: No | Limited Life: No |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: Yes, dry trash, wet trash, batteries, sharps containers, and biological/biomedical waste |
| Launch Stowage Method: Folded around KBO-M | Progress Removal Stowage Method: Strap it in |
| MPLM Removal Stowage Method: In RSR locker; standalone | Middeck Removal Stowage Method: Middeck locker if volume small enough |

FIGURE D-2 RUBBER LINED BAG

SSP 50481
Revision B

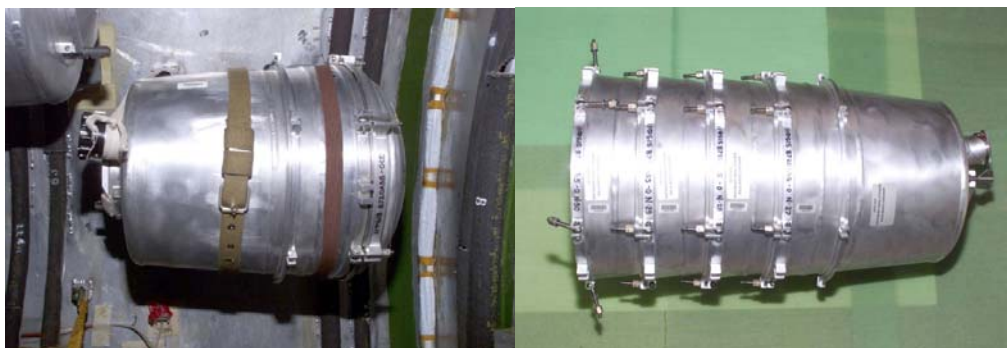

| | |
|---|---|
| OPS NOM: Solid Waste Container (KTO) Контейнер твердых отходов (KTO) | ASSY P/N: 11 ϕ 615.8720A55-0 11 ϕ 615.8720A55-20 body 11 ϕ 615.8720A55-10 lid |
| Description: KTO is used for solid waste and can contain biological waste | Material: |
| Dimensions (Launch): body 12.99 in. height x 12.99 in. diameter / 33.0 cm height x 33.0 cm diameter Lid 2 in. height x 12.99 diameter / 5.1 cm height x 33.0 cm diameter | Dimensions (In Use/Full): 14.99 in. height x 12.99 in. diameter / 38.0 cm height x 33.0 diameter cm |
| Usable Volume: ~ 0.779 CTBE / 41028.4 cm ³ | Unit Mass (Empty): 7.76 lbs / 3.50 kg Body: 5.63 lb / 2.53 kg Lid: 2.13 lb / 0.97 kg |
| Unit Mass (STD/Full): 25.353 lbs / 11.5 kg | Special Requirements (Yes/No): |
| Assembly Required: Yes | Limited Life: |
| Certified for use in all ISS: For use in SM | Acceptability for Hazardous Waste: Yes - if needed |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-3 SOLID WASTE CONTAINER

SSP 50481
Revision B



| | |
|--|--|
| OPS NOM: EDV Контейнер для урины | ASSY P/N: 11φ 615.8711-0A15-1 (EDV Assembly) 11φ615.8711-120A15-1 (EDV bucket) 11φ615.8711-180A15-1 (EDV lid) 11φ 615.8711-100A15 (EDV Adapter) (EDV Adapter) 11φ 615.8711-210A15-1 (EDV Fill Indicator) |
| Description: Primarily used for urine and wastewater collection. | Material: |
| Dimensions (Launch): EDVs usually launched in set of 6 buckets and separately 6 lids. With rack attachment spike and lid (Top 13.1 in. / 33.4 cm diameter, Height 21.57 in. / 54.8 cm, Bottom 9 in. / 23.0 cm diameter). EDV Bucket 17.362 in. x 12.992 in. diameter / 44.1 cm x 33 cm diameter EDV lid 4.134 in. x 12.992 in. / 10.5 cm x 33 cm diameter | Dimensions (On-Orbit): Without rack attachment spike and lid (Top=33.4 cm diameter, Height=40.0 cm, Bottom=23.0 cm diameter) |
| Usable Volume: 0.417 CTBE / 22 liters | Unit Mass (Empty): 12.12 lbs / 5.5 kg |
| Unit Mass (Full): 58.4 lbs / 26.5 kg | Special Requirements: EDV cap should be taped to the hydro-connector body |
| Assembly Required: Yes | Limited Life: 90-days of on-orbit operations (defined as any operations where the hydro-connector is connected/disconnected). One year of on-orbit stowage is designated for Progress disposal. One year minus 27 days, or 338 days of on-orbit stowage prior to loading in an MPLM for return to ground. An empty EDV may be stored up to 5 years prior to use. |
| Certified for use in all ISS: Use: SM; Stowage: All | Acceptability for Hazardous Waste: No |
| Launch Stowage Method: EDV launch support | Progress Removal Stowage Method: Stow in EDV launch support or tie via string to Progress structure |
| MPLM Removal Stowage Method: RSP and RSR locker | Middeck Removal Stowage Method: Not approved for Middeck removal |

FIGURE D-4 CONTAINER FOR WATER/URINE


SSP 50481
Revision B



| | |
|---|---|
| OPS NOM: Food Waste Bag Пакеты для отходов | ASSY P/N: 11 ϕ 615.8716-OA15 |
| Description: Soft bag used to place table scraps, and other small wet waste items | Material: Soft rubberized cloth |
| Dimensions (Launch): 10 in. x 5 in. x 0.2 in. / 25.4 cm x 12.8 cm x 0.5 cm | Dimensions (In Use/Full): 8 in. x 5 in. diameter / 20.3 cm x 12.7 cm diameter |
| Usable Volume: 0.048 CTBE / 2573.998 cm ³ | Unit Mass: 0132 lbs / 0.06 kg |
| Unit Mass (STD/Full): 1.984 lbs / 0.9 kg | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: No |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: Inside KBO-M or another bag |
| MPLM Removal Stowage Method: If placed in RSR or inside another bag | Middeck Removal Stowage Method: |

FIGURE D-5 FOOD WASTE BAG

SSP 50481
Revision B

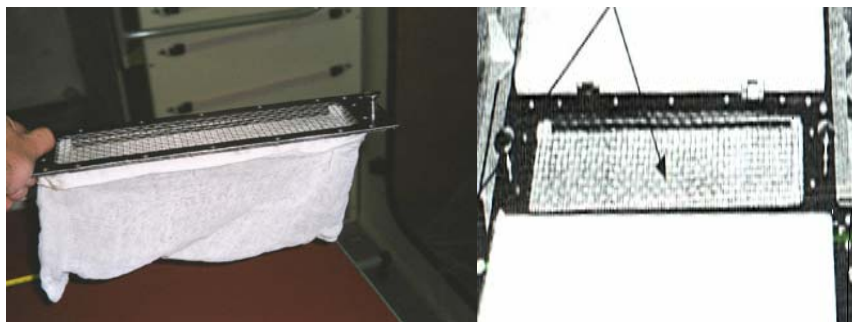

| | |
|---|---|
| OPS NOM: Crumb Bag ПАКЕТЫ ДЛЯ КРОШЕК | ASSY P/N: 11 φ 615.8717-OA15 |
| Description: Bag for crumbs only | Material: |
| Dimensions (Launch): 16.142 in. x 7.874 in. x 0.079 in. / 41 cm x 20 cm x 0.2 cm | Dimensions (In Use/Full): |
| Usable Volume: | Unit Mass: 0.066 lbs / 0.03 kg |
| Unit Mass (STD/Full): | Special Requirements (Yes/No): |
| Assembly Required: | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: No - crumbs only |
| Launch Stowage Method: | Progress Removal Stowage Method: Inside KBO-M or another bag |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-6 CRUMB BAG

SSP 50481
Revision B



| | |
|---|---|
| OPS NOM: Sharps Container КОНТЕЙНЕР ОБЩЕГО ИСПОЛЬЗОВАНИЯ ДЛЯ ОСТРЫХ ПРЕДМЕТОВ | ASSY P/N: KLSH320043-302 |
| Description: Used to dispose sharp objects such as needles and razor blades | Material: Rubberized cloth |
| Dimensions (Launch): 7 in. x 3 in. x 7 in. / 17.7 cm x 7.6 cm x 17.7 cm | Dimensions (In Use/Full): 7 in. x 3 in. 7 in. / 17.7 cm x 7.6 cm x 17.7 cm |
| Usable Volume: | Unit Mass: 0.85 lbs / 0.386 kg |
| Unit Mass (STD/Full): 3 lbs / 1.361 kg | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: Yes, sharps |
| Launch Stowage Method: | Progress Removal Stowage Method: inside KBO-M or other trash bag |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method |

FIGURE D-7 GENERAL USE SHARPS CONTAINER

SSP 50481
Revision B



| | |
|--|---|
| OPS NOM: Hefty Cinch Sak, 29 gal. Crew Provisioning Мешок марки Hefty Cinch Sak, затягиваемый, на 29 галлонов | ASSY P/N: SLZ33112284-001 |
| Description: | Material: |
| Dimensions (Launch): 5.5 in. x 9.5 in. x 0.25 in. / 13.9 cm x 24.1 cm x 0.6 cm (folded) | Dimensions (In Use/Full): Dependent upon contents |
| Usable Volume: Dependent upon contents max 2.084 CTBE / 109776.9 cm ³ | Unit Mass: 0.12 lbs / 0.054 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: No, not certified for use in RS | Acceptability for Hazardous Waste: Yes - non-sharp hazardous materials with appropriate containment |
| Launch Stowage Method: | Progress Removal Stowage Method: Taped closed, returned in a jettison stowage bag or RLB |
| MPLM Removal Stowage Method: Taped closed, returned in a jettison stowage bag or RLB | Middeck Removal Stowage Method: Taped closed, returned in a jettison stowage bag or RLB |

FIGURE D-8 HEFTY CINCH SAK

SSP 50481
Revision B



| | |
|---|---|
| OPS NOM: Black Polyliner Bag Черный мешок фирмы Polyliner | ASSY P/N: SLZ33112285-001 |
| Description: Contingency use bag | Material: |
| Dimensions (Launch): 5 in. x 8.75 in. x 0.25 in. / 12.7 cm x 22.2 cm x 0.6 cm (folded) | Dimensions (In Use/Full): |
| Usable Volume: Dependent upon contents | Unit Mass: 0.004 lbs / 0.002 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: No |
| Certified for use in all ISS: | Acceptability for Hazardous Waste: Yes - non-sharp hazardous materials with appropriate containment |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-9 BLACK POLYLINER BAG

SSP 50481
Revision B



| | |
|---|--|
| OPS NOM: Fecal Collection Assembly (Apollo Bag) | ASSY P/N: 10108-10045-01 |
| Description: Used as a contingency bag for solid human waste | Material: |
| Dimensions (Launch): Folded fecal and storage bag combined 7.5 in. x 4 in. x 0.375 in. / 19.1 cm x 10.2 cm x 0.9 cm | Dimensions (In Use): unfolded fecal bag with flange seal 7.5 in. x 12 in. x 0.12 in. / 19.1 cm x 30.5 cm x 0.3 cm Dimensions (Full): unfolded storage bag for used fecal bag 7.5 in. x 14 in. x 0.12 in. / 19.1 cm x 35.6 cm x 0.3 cm |
| Usable Volume: 0.004 CTBE / 206.477 cm | Unit Mass: 0.13 lbs / 0.059 kg |
| Unit Mass (STD/Full): | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-10 APOLLO BAG


SSP 50481
Revision B



| | |
|---|--|
| OPS NOM: CUCD | ASSY P/N: 10108-10076-05 |
| Description: Used as a contingency bag for liquid human waste | Material: |
| Dimensions (Launch): 6.5 in. x 4.75 in. x 0.25 in. / 16.5 cm x 12.1 cm x 0.6 cm | Dimensions (In Use/Full): 13.5 in. x 19 in. x 0.125 in. / 34.3 cm x 48.3 cm x 0.3 cm |
| Usable Volume: 0.009 CTBE / 525.41 cm | Unit Mass: 0.07 lbs / 0.032 kg |
| Unit Mass (STD/Full): | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: No |
| Certified for use in all ISS: | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-11 CONTINGENCY URINE COLLECTION DEVICE

SSP 50481
Revision B

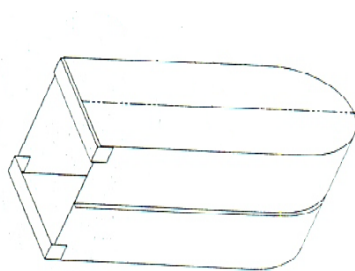

| | |
|--|--|
| OPS NOM: Spacehab Container Liner | ASSY P/N: 9062251-1 |
| Description: Plastic liner that goes inside the Spacehab Trash Container | Material: Clear FEP |
| Dimensions (Launch): 8 in. x 6 in. x 0.25 in. / 20.3 cm x 15.2 cm x 0.6 cm | Dimensions (In Use/Full): 21 in. x 8 in. x 6 in. / 53.3 cm x 20.3 cm x 15.2 cm |
| Usable Volume: 0.296 CTBE / 15616.87 cm ³ | Unit Mass: 0.12 lbs / 0.054 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: No, not certified for use in RS | Acceptability for Hazardous Waste: No, to be used for dry and/or pre-bagged wet trash only |
| Launch Stowage Method: Inside CTB | Progress Removal Stowage Method: The full bag is placed within a non-flammable container (CTB, Rubber-Lined Bag, etc.) |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-12 SPACEHAB CONTAINER LINER

SSP 50481
Revision B

| | |
|--|---|
| OPS NOM: Cargo Transfer Bag, Half-size Половинная Сумка CTB | ASSY P/N: SEG33111836 |
| Description: | Material: |
| Dimensions (Launch): 16.75 in. x 10.75 in. x 9.75 in. / 42.54 cm x 27.3 cm x 24.8 cm | Dimensions (In Use/Full): dependent upon contents |
| Usable Volume: 0.54 CTBE / 28769.92 cm ³ | Unit Mass: 2.2 lbs / 0.998 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |
| OPS NOM: Cargo Transfer Bag, Full size without windows Одинарная сумка CTB | ASSY P/N: SEG33111838 |
| Description: | Material: |
| Dimensions (Launch): 19.76 in. x 16.7 in. x 9.7 in. / 50.2 cm x 42.5 cm x 24.8 cm | Dimensions (In Use/Full): Dependent upon contents |
| Usable Volume: 1.0 CTBE / 52924.19 cm ³ | Unit Mass: 4.01 lbs / 1.8 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |
| OPS NOM: Cargo Transfer Bag, Full size with windows Одинарная сумка CTB с окошком | ASSY P/N: SEG33111837 |
| Description: | Material: |
| Dimensions (Launch): 19.75 in. x 16.75 in. x 9.75 in. / 50.16 cm x 42.5 cm x 24.7 cm | Dimensions (In Use/Full): Dependent upon contents |
| Usable Volume: 1.0 CTBE / 52867.55 cm ³ | Unit Mass: 3.7 lbs / 1.678 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-13 CARGO TRANSFER BAG (PAGE 1 OF 2)

SSP 50481
Revision B

| | |
|---|---|
| OPS NOM: Cargo Transfer Bag, Double Size Двойная Сумка СТБ | ASSY P/N: SEG33111839 |
| Description: | Material: |
| Dimensions (Launch): 19.75 in. x 16.75 in. x 18.75 in. / 50.17 cm x 42.5 cm x 47.6 cm | Dimensions (In Use/Full): Dependent upon contents |
| Usable Volume: | Unit Mass: 4.5 lbs / 2.04 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |
| OPS NOM: Cargo Transfer Bag, Triple Size Тройная Сумка СТБ | ASSY P/N: SEG33111840 |
| Description: | Material: |
| Dimensions (Launch): 29.5 in. x 16.75 in. x 19.75 in. / 74.9 cm x 42.5 cm x 50.2 cm | Dimensions (In Use/Full): Dependent upon contents |
| Usable Volume: | Unit Mass: 6.2 lbs / 2.8 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-13 CARGO TRANSFER BAG (PAGE 2 OF 2)

SSP 50481
Revision B



| | |
|---|---|
| OPS NOM: In-flight Stowage Restraint Bag Большой сетчатый мешок | ASSY P/N: 10108-10075-03 |
| Description: Used to contain/stow/temp stow small loose items for clothing after exercise | Material: Made of a webbing material |
| Dimensions (Launch): 8 in. x 3.5 in. / 20.3 cm x 8.9 cm (rolled) | Dimensions (In Use/Full): Dependent upon contents |
| Usable Volume: | UNIT MASS: 0.1 lbs / 0.045 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: No |
| Launch Stowage Method: Rolled up inside a CTB | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-14 IN-FLIGHT STOWAGE RESTRAINT BAG

SSP 50481
Revision B



| | |
|--|---|
| OPS NOM: Jettison Stowage Bag | ASSY P/N: SEB 13100134-304 |
| Description: Contingency container for hefty cinch sak bag and/or black polyliner bag - Russian equivalent of rubber lined bag | Material: |
| Dimensions (Launch): 9.75 in. x 9.75 in. x 1 in. / 24.7 cm x 24.7 cm x 2.5 cm | Dimensions (In Use/Full): Dependent upon contents |
| Usable Volume: ~ 2.199 CTBE / 115815.9 cm ³ (Volume will be reduced if the cord is used to close the bag) | Unit Mass: 0.74 lbs / 0.34 kg |
| Unit Mass (STD/Full): Dependent upon contents | Special Requirements (Yes/No): |
| Assembly Required: No | Limited Life: |
| Certified for use in all ISS: Yes | Acceptability for Hazardous Waste: No |
| Launch Stowage Method: | Progress Removal Stowage Method: |
| MPLM Removal Stowage Method: | Middeck Removal Stowage Method: |

FIGURE D-15 JETTISON STOWAGE BAG

SSP 50481
Revision B

APPENDIX E

TRASH/WASTE INTEGRATION GROUP

SSP 50481
Revision B**APPENDIX E - TRASH/WASTE INTEGRATION GROUP**

The TWIG defines the overall policy for waste management on the ISS. It works with all systems/payloads that generate waste to define a plan to ensure habitability on the ISS. This team is the focus for discussion of all waste issues for the ISS Program. IPs are members of the TWIG to ensure that a single, coordinated plan is implemented. In addition, the TWIG integrates requirements for each waste hardware item. The TWIG submits MRs for ISS waste disposal. The TWIG provides mass, dimension, and drawing data to either the Russian RSC-E Cargo Flow Group or ATV Cargo Integration Group for US waste disposal on Progress/ Soyuz or ATV, respectively. Waste Management documents, assessments and supporting data are located on the following web page: http://iss-www.jsc.nasa.gov/ss/issapt/mio/trash/trash_home.html. The TWIG is co-chaired by the US and Russian ISS Waste Managers. Representatives from the following teams and technical areas participate in TWIG meetings and discussions

RSC-E CARGO FLOW GROUP

The RSC-E Cargo Flow Group determines the projected accumulation of waste, which includes crew waste, replaced (service life and failed) hardware on the ISS RS, structural elements to be removed after the Russian modules are reactivated, and waste from scientific experiments. This group works in close cooperation with specialists in charge of technical and management issues regarding the waste containers with respect to ISS RS crew waste collection and storage. They also work with the standard systems hardware and payload managers and the operations group. The RSC-E Cargo Flow Group coordinates with Russian mission integration and Team 0 management. The RSC-E Cargo Flow Group is a member of the TWIG and coordinates closely with respect to ISS waste operations planning issues and hardware and generation assessments. The RSC-E Cargo Flow Group is also a member of the MWG.

ESA TEAMS**<TBD E-1>****RSC-E INTEGRATION GROUP**

The Russian ISS Cargo Integration Group plans stowage of hardware and cargo on the ISS RS, including waste stowage in the ISS RS modules and also the location in Progress and Soyuz to return from the ISS, complying with requirements for these cargo vehicles.

MANIFEST WORKING GROUP (MULTILATERAL)

The MWG reviews hardware requests in support of Station requirements, provides a forum for coordination of manifest assessments with all affected disciplines, and coordinates MR authorization/approval. The MWG is chaired by the ISS Manifest Lead from the Mission Integration and Operations Office.

SSP 50481
Revision B**CREW PROVISIONING WORKING GROUP (MULTILATERAL)**

The Crew Provisioning Working Group (CPWG) insures crew supplies are available on-orbit. The CPWG, in coordination with the Astronaut office, Engineering and the TWIG, will provide manifest support as re-supply of contingency waste hardware is required. The chair of the CPWG is in the Mission Integration and Operations Office.

ISS PROGRAM SAFETY AND MISSION ASSURANCE OFFICE

The ISS Program Safety and Mission Assurance (S&MA) Office develops, implements, and assures compliance with ISS Program requirements for integrated safety, which consist of flight, on-orbit, and ground safety. The safety process is identified in Section 6.0, SSP 50200-01, Station Program Implementation Plan, Volume 1: Station Program Management Plan.

RSC-E SAFETY GROUP

The Russian Safety Group together with representatives from the JARSWG shall coordinate as required during the safety process review and aid in certifying waste containers for disposal in Progress vehicles or return in the Soyuz or Shuttle.

NASA INCREMENT MANAGEMENT TEAM

The Increment Management Team (IMT) has the responsibility to integrate and prioritize the consolidated set of increment-specific requirements for re-supply of waste containers and disposal of ISS waste. The IMC has the real-time interface between the MCC and the ISS Program Office for relaying waste management requirements and issues between MOD and the TWIG. The Increment Managers are in the Mission Integration and Operations Office.

NASA LAUNCH PACKAGE TEAM

The Launch Package Team (LPT) has the responsibility to integrate and prioritize the consolidated joint mission (ISS and Space Shuttle Program (SSP)) launch package requirements. The LPT coordinates manifest implementation for waste return with mission operations, Shuttle program and ground processing teams. The Launch Package Managers (LPM) are in the Mission Integration and Operations Office.

NASA MISSION OPERATIONS DIRECTORATE/CREW SYSTEMS TEAM

The MOD Crew Systems team is responsible for training each expedition crew for US waste hardware. During on-orbit operations, this team is on call for questions related to waste hardware and handling.

NASA GOVERNMENT FURNISHED EQUIPMENT FLIGHT PROJECTS REPRESENTATIVE

The Government Furnished Equipment (GFE) hardware curator is responsible for ensuring that all current GFE waste hardware is certified for flight and that new requirements generated by the TWIG are being evaluated and implemented for future increments.

SSP 50481
Revision B**NASA FLIGHT CREW OFFICE**

The Flight Crew Office provides a representative to serve as a member of the TWIG and other groups working issues related to waste management and stowage. This representative is responsible for representing the interests of flight crews during the mission planning process and evaluations of hardware for waste stowage.

NASA ISS PAYLOAD OFFICE

The ISS Payload Office provides a summary of data, submitted by the PD, to the TWIG for all payloads planned during each stage and increment with respect to waste generated by each payload and which hazardous categories this waste will encompass. This data will be included in the integrated assessments and in hardware manifest and stowage planning.

NASA EXTRAVEHICULAR ACTIVITY PROJECT OFFICE

The Extravehicular Activity (EVA) Project Office manages manifest and resupply of EVA equipment and provides data for quantities of waste being generated by EVA equipment.

NASA MEDICAL OPERATIONS

The Medical Operations Group representative to the TWIG provides data for medical waste as well as other inputs affecting medical equipment and standards.

HABITABILITY AND ENVIRONMENTAL FACTORS OFFICE /TOXICOLOGY GROUP (MULTILATERAL)

NASA/JSC toxicologists assess ISS hazardous materials for possible toxic hazard effects on the crew as referenced in JSC 26895, Guidelines for Assessing the Toxic Hazard of Spacecraft Chemicals and Test Materials. FSA toxicologists will assess hazardous materials that are located within the Russian elements or vehicles.

KSC WASTE GROUND PROCESSING TEAM

The KSC Waste Ground Processing Team has responsibility for the physical deintegration of waste during post-launch operations. All operations of this team are governed by US federal, state, and local guidelines.

DIRECTORATE/CARGO INTEGRATION OFFICER TEAM

The Inventory Stowage Officer (ISO), who is a member of the Cargo Integration Officer (CIO) team, is responsible for directing the crew via a message as to what items are approved for trash and how they should be packed for disposal. ISO assists with the development of the trash candidates list by notifying the TWIG of items that the crew has requested for trash. Additionally, the ISO identifies items that would take significant crew time to retrieve and the ISO works to optimize the stowage space that is gained from trashing items.

SSP 50481
Revision B

APPENDIX F

WASTE LABEL EXAMPLE

SSP 50481
Revision B

APPENDIX F - WASTE LABEL EXAMPLE













| | | | | | | | | | | | | | |
|---|--|---|--|---|--|---|---|---|--|---|--|---|--|
|  Toxicity | |  | |  | |  | |  | |  | |  | |
| Trash Type | | | | | | | | | | | | | |
| | | Non-Hazardous (Dry) | | | | | | Non-Hazardous (Wet) | | | | | |
| H A Z A R D O U S | |  Batteries (BA) | | | | |  Chemical (CH) | | | | | | |
| | |  Biological/ Biomedical (BB) | | | | |  Radioactive (RA) | | | | | | |
| | |  Sharp (SH) | | | | | | | | | | | |

FIGURE F-1 WASTE LABEL EXAMPLE

SSP 50481
Revision B

APPENDIX G

CREW COMMON WASTE

SSP 50481
Revision B

APPENDIX G - CREW COMMON WASTE

MEDICAL OPERATIONS
CHECS-EHS/HMS
NON-HAZARDOUS (COMMON) TRASH

<TBD G-1>