

**NASA KSC Export Control Office (ECO)**  
**Export Determination Stamp**  
**EDDS # 7348 8**

(Stamp Revision: 03-22-07)

<b>SENSITIVE BUT UNCLASSIFIED (SBU)</b>			
Instructions: This item must be reviewed under the requirements for "Sensitive But Unclassified Information" as described in NPR 1600.1. Material that is export-sensitive is automatically considered to contain SBU and does not require an SBU Reviewer signature. Material that is <u>not</u> export-sensitive must be reviewed for SBU as required per NASA Form 1686.			
8) KSC-STD-E-0004A (May 30, 1990), Pneumatic and Hydraulic Mechanical Components, Electrical Design, Standard For,	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>	SBU Reviewer's Signature
			Date
Contains SBU?	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<i>C. Wayne Ranow</i>
			7/2/2007
<b>EXPORT CONTROL (EC)</b>			
Instructions: Once it is determined the document includes EC data, contact the KSC ECO Help Desk at 867-9209 (or your directorate Export Control Rep) for a determination of the proper export category.			
NOTE: If the document does <u>not</u> contain export-controlled technical data, it is considered EAR 99 NLR (No License Required) under the Export Administration Regulations of the Department of Commerce.			
ECO Reviewer's Name and Organization		ECO Reviewer's Signature	
C. Wayne Ranow, NASA, KSC, CEA		<i>C. Wayne Ranow</i>	
		Date	
		7/2/2007	
	Determination (Check only one box) and Category		
<b>EAR 99 NLR (No EC)</b>	<input checked="" type="checkbox"/>	The item is technical in content, but is not technical data as defined by the ITAR or the EAR, and therefore is EAR 99 NLR (no export license required). [General Prohibition Six (Embargo) applies to all items subject to the EAR, i.e. items on the CCL and within EAR 99 NLR. You may not make an export or re-export contrary to the provisions of part 746 (Embargos and Other Special Controls) of the EAR and 22 CFR part 126.1 of the ITAR.]	
	<b>EAR 99 NLR</b>		
<b>EAR Controlled</b>	<input type="checkbox"/>	This document is within the purview of the Export Administration Regulations (EAR), 15 CFR 730-774, and is export controlled. It may <u>not</u> be transferred to foreign nationals in the U.S. or abroad without specific approval of a knowledgeable NASA export control official, and/or unless an export license or license exception is obtained/available from the Bureau of Industry and Security, United States Department of Commerce. Violations of these regulations are punishable by fine, imprisonment, or both.	
<b>ITAR Controlled</b>	<input type="checkbox"/>	This document contains information which falls under the purview of the U.S. Munitions List (USML), as defined in the International Traffic in Arms Regulations (ITAR), 22 CFR 120-130, and is export controlled. It shall not be transferred to foreign nationals, in the U.S. or abroad, without specific approval of a knowledgeable NASA export control official, and/or unless an export license or license exemption is obtained/available from the United States Department of State. Violations of these regulations are punishable by fine, imprisonment, or both.	



**KSC-STD-E-0004A**

**May 30, 1990**

Supersedes  
KSC-STD-E-0004  
May 28, 1969

**PNEUMATIC AND HYDRAULIC  
MECHANICAL COMPONENTS,  
ELECTRICAL DESIGN,  
STANDARD FOR**

**ENGINEERING DEVELOPMENT DIRECTORATE**

National Aeronautics and  
Space Administration

John F. Kennedy Space Center




**KSC-STD-E-0004A**

**May 30, 1990**

Supersedes  
KSC-STD-E-0004  
May 28, 1969

**PNEUMATIC AND HYDRAULIC  
MECHANICAL COMPONENTS,  
ELECTRICAL DESIGN,  
STANDARD FOR**

Approved By:

 6-11-90  
James D. Phillips  
Director of Engineering Development

**JOHN F. KENNEDY SPACE CENTER, NASA**

## TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
1.	SCOPE . . . . .	1
2.	APPLICABLE DOCUMENTS . . . . .	1
3.	REQUIREMENTS . . . . .	3
3.1	Electrical Wiring . . . . .	3
3.1.1	Wire Identification Code . . . . .	3
3.1.2	Terminating . . . . .	3
3.1.3	Lacing or Sleeving . . . . .	3
3.1.4	Slack Wiring . . . . .	3
3.1.5	Hookup Wire . . . . .	3
3.1.6	Wire Gage . . . . .	3
3.1.7	Magnetic Wire . . . . .	4
3.2	Solenoid Coils . . . . .	4
3.2.1	Hookup . . . . .	4
3.2.2	Impregnation and Encapsulation . . . . .	4
3.2.3	Sealing . . . . .	4
3.2.4	Operating Voltage Requirements . . . . .	4
3.3	Switching Assemblies . . . . .	4
3.3.1	Makeup and Qualification . . . . .	4
3.3.2	Sealed Units . . . . .	4
3.3.3	Nonsealed Units . . . . .	5
3.3.4	Warning Label . . . . .	5
3.3.5	Current and Voltage Rating . . . . .	5
3.3.6	Voltage Drops . . . . .	5
3.3.7	Switching Assemblies Requiring a Power Source . . . . .	5
3.4	Position Indicators . . . . .	6
3.4.1	Sensor Position Indication . . . . .	6
3.4.2	Sensor Actuation . . . . .	6
3.4.3	Independence of Circuits . . . . .	6
3.4.4	Operating Voltage Requirements . . . . .	7
3.5	Potting Compound . . . . .	7
3.5.1	Material . . . . .	7
3.5.2	Molds . . . . .	7
3.5.3	Coverage . . . . .	7
3.6	Electrical Connectors . . . . .	7
3.6.1	Standard Connectors . . . . .	7
3.6.2	Hermetically Sealed Units . . . . .	7
3.6.3	Connector Insulation . . . . .	7

## TABLE OF CONTENTS (cont)

<u>Section</u>	<u>Title</u>	<u>Page</u>
3.7	Pin Functions . . . . .	8
3.7.1	Single Solenoid With 2-Pin Connector . . . . .	8
3.7.2	Double Solenoid Valve With 3-Pin Connector . . . . .	8
3.7.3	Solenoid and Indicator Switch With 4-Pin Connector . . . . .	8
3.7.4	Double Solenoid Valve With a 3-Pin Connector for Position Indication	12
3.7.5	Solenoid and Indicator Switch With 5-Pin Connector . . . . .	12
3.7.6	Double Solenoid Valve With a 6-Pin Connector for Position Indication	12
3.7.7	Switches, Limit, Indicator, and Others . . . . .	14
3.7.8	Potentiometer-Type Transducers . . . . .	14
3.8	Insulation Resistance . . . . .	14
3.9	External Markings . . . . .	14
3.9.1	Diagrams . . . . .	14
3.9.2	Connector Designations . . . . .	14
3.9.3	Other Markings . . . . .	16
3.10	Testing . . . . .	16
3.11	Documentation . . . . .	16
4.	QUALITY ASSURANCE PROVISIONS . . . . .	16
4.1	Inspectability . . . . .	16
4.2	Integrity Control . . . . .	16
4.3	Inspections and Tests . . . . .	16
4.4	Contractual Provisions . . . . .	16
5.	PREPARATION FOR DELIVERY . . . . .	17
6.	NOTES . . . . .	17
6.1	Intended Use . . . . .	17
6.2	Definitions . . . . .	17

## LIST OF ILLUSTRATIONS

<u>Figure</u>	<u>Title</u>	<u>Page</u>
1	Typical Voltage Drop Test Setup . . . . .	6
2	Single Solenoid With 2-Pin Connector . . . . .	8
3	Single Solenoid and Indicator Switch With 2- and 3-Pin Connectors .	10
4	Double Solenoid Valve With 3-Pin Connector . . . . .	10
5	Solenoid and Indicator Switch With 4-Pin Connector . . . . .	11
6	Double Solenoid Pilot Valve and Main Valve . . . . .	11
7	Solenoid and Indicator Switch With 5-Pin Connector . . . . .	13
8	Double Solenoid Valve With a 6-Pin Connector for Position Indica- tion . . . . .	13
9	Switches, Limit, Indicator, and Others . . . . .	15
10	Potentiometer-Type Transducers . . . . .	15

## ABBREVIATIONS AND ACRONYMS

AWG	American Wire Gage
CCW	counterclockwise
COM	common
CW	clockwise
EX	exhaust
GSE	ground support equipment
KSC	John F. Kennedy Space Center
NASA	National Aeronautics and Space Administration
No.	number
P	pressure
PSI	pounds per square inch
SOL	solenoid
TYP	typical
Vdc	volt direct current
°C	degree Celsius
°F	degree Fahrenheit

PNEUMATIC AND HYDRAULIC  
MECHANICAL COMPONENTS ELECTRICAL DESIGN  
STANDARD FOR

1. SCOPE

This standard establishes the requirements applicable to the electrical design of pneumatic and hydraulic mechanical components at the John F. Kennedy Space Center (KSC), NASA. This standard applies to those components located in nonconventional facilities and ground support equipment (GSE) where the natural or induced environment is severe and component reliability is essential.

2. APPLICABLE DOCUMENTS

The following documents form a part of this document to the extent specified herein. When this document is used for procurement, including solicitation, or is added to an existing contract, the specific revision levels, amendments, and approval dates of said documents shall be specified in an attachment to the Solicitation/Statement of Work/Contract.

Governmental

NASA Management Directives

NHB 5300.4(1B)	Quality Program Provisions for Aeronautical and Space System Contractors
NHB 5300.4(1C)	Inspection System Provisions for Aeronautical and Space System Materials, Parts, Components and Services

Specifications

John F. Kennedy Space Center, NASA

KSC-S-126	Sealing of Electrical Components and Enclosures, Specification for
KSC-E-165	Electrical Ground Support Equipment Fabrication, Specification for

Military

J-W-1177	Wire, Magnet, Electrical
----------	--------------------------



KSC-STD-E-0004A

May 30, 1990

MIL-C-5015	Connectors, Electrical, Circular Threaded AN Type, General Specification for
MIL-W-5086	Wire, Electric, Polyvinyl Chloride-Insulated, Copper or Copper Alloy
MIL-W-16878	Wire, Electrical, Insulated, General Specification for
MIL-S-22473	Sealing, Locking and Retaining Compounds (Single-Component)
MIL-C-26482	Connectors, Electrical, Circular (Miniature, Quick Disconnect, Environment Resisting). Receptacles and Plugs, General Specification

### Standards

#### John F. Kennedy Space Center (KSC), NASA

KSC-STD-132	Potting and Molding Electrical Cable Assembly Terminations
KSC-STD-152	Graphical Symbols for Drawings
KSC-STD-E-0015	Marking of Ground Support Equipment
KSC-STD-E-0010	Soldering of Electrical Connections (Hand or Machine)

### Military

MIL-STD-681	Identification Coding and Application of Hook Up and Lead Wire
-------------	--

### Drawings

#### John F. Kennedy Space Center (KSC), NASA

75M13302	Connector Inspection Specification
75M13308	Insulating Gaskets and Bushings for Electrical Connectors

"(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specified procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)"

### 3. REQUIREMENTS

#### 3.1 Electrical Wiring.

3.1.1 Wire Identification Code. - All wiring required in the fabrication and utilization of components and materials covered by this standard shall be identified as specified herein and by color code in accordance with MIL-STD-681. Each wire shall be coded separately. Wire coding shall be identified on the manufacturer's schematic or schematic part of the manufacturer's drawing.

3.1.2 Terminating. - Internal electrical wiring that requires the joining of two or more wires shall be terminated on the existing terminals of the coil, switch, connector, printed circuit board, terminal block, or other device if terminal size permits. If the terminal size does not have the capacity for two or more wires as needed, an auxiliary terminal shall be provided that is supported and insulated. All soldered joints shall conform to the requirements of KSC-STD-E-0010. Where soldering is impractical, brazing, welding, or spot welding may be used in lieu of soldering upon approval of the responsible design organization. The weld must be of a size capable of carrying current equivalent to or greater than the largest current at the joint and throughout any cross section of the joint without developing hot spots or overheating in excess of the normal temperature of any conductor joining the termination. Termination shall be potted or encapsulated in accordance with KSC-STD-132.

3.1.3 Lacing or Sleeving. - Wiring shall be laced, tied, or sleeved, as specified in KSC-E-165, as required, to prevent mechanical damage by chafing or interfering with mechanical operation.

3.1.4 Slack Wiring. - Wire length shall have sufficient excess length to allow for one removal and replacement of the electrical connector if required.

3.1.5 Hookup Wire. - Hookup wire shall be 19 strand minimum and shall be in accordance with MIL-W-16878 or type 1 of MIL-W-5086 for temperatures up to 105 degrees Celsius (°C) (221 degrees Fahrenheit (°F)). Type E (without nylon jacket) of MIL-W-16878, 200 °C (392 °F) shall be used where component temperatures are above 105 °C.

3.1.6 Wire Gage. - The gage of hookup wire shall not be less than American Wire Gage (AWG) 24 for a maximum current of 3 amperes, AWG 22 for a maximum current of 4 amperes, and AWG 20 for a maximum current of 5 amperes. Where bussing of adjacent terminals is employed, AWG 16 bare, solid tinned, copper wire shall be used. For special and greater current applications, wire specifications shall be approved by the cognizant NASA design activity.

KSC-STD-E-0004A

May 30, 1990

3.1.7 Magnetic Wire. - Wire to be used in solenoid coils and similar applications shall be in accordance with class 200 of J-W-1177.

### 3.2 Solenoid Coils.

3.2.1 Hookup - Hookup wire leads shall be continuous from the solenoid coil wire terminations to the solder cups of the connector. Connections at the coil shall be enclosed by encapsulation or potting in accordance with KSC-STD-132. Where coils operate at temperatures above 140 °C (284 °F) the leads shall be brazed or welded to the coil wire.

3.2.2 Impregnation and Encapsulation. - Solenoid coils shall be vacuum impregnated with silicone compounds and then totally sealed or encapsulated with a material capable of withstanding deterioration caused from, or by, maximum heat under continuous operation at maximum voltage and deterioration caused from limited contact with corrosive vapors and salt air.

3.2.3 Sealing. - Solenoid coils shall be either hermetically sealed in accordance with Grade A of KSC-S-126 or totally encapsulated as specified in KSC-STD-132.

3.2.4 Operating Voltage Requirements. - Solenoid valves shall operate satisfactorily at the rated pneumatic and/or hydraulic pressures as follows:

- a. During continuous operation, the solenoid shall hold-in with any applied voltage from 18 to 30 volts, direct current (V dc).
- b. Upon increasing the applied voltage from 0 to 30 V dc, the solenoid shall pull in (actuate) within the range of 8 to 18 V dc.
- c. Upon decreasing the applied voltage from 30 to 0 V dc, the solenoid shall drop out (deactuate) within the range of 17 to 1 V dc.

### 3.3 Switching Assemblies

3.3.1 Makeup and Qualification. - All switching devices, circuit-making or circuit-breaking, shall consist of an assembly of as many single-pole, double-throw, hermetically sealed switch units (3.3.2) as may be required. Dual, multipole, and special units require prior approval of the responsible design organization. Hookup wire leads shall be continuous from the coil magnet wire termination to the solder cups of the connector. Connections at the coil shall be enclosed by encapsulation or potting in accordance with KSC-STD-132.

3.3.2 Sealed Units. - Sealed-unit switching devices shall be hermetically sealed in accordance with Grade A of KSC-S-126 (metal to metal and metal to ceramic or glass). Every attempt should be made to attain the highest possible grade of sealing since sealed units may be used in all locations. Nonsealed units shall be limited to use within protected areas and identified in accordance with 3.3.4 of this standard. Enclosures of switching assemblies shall provide

hermetic sealing between the circuit-making or circuit-breaking contact points and the exterior of the device. This seal may be provided by sealing the assembly case or any subenclosure down to the enclosure of the switching unit itself. Where hermetic sealing of switch points is provided by subenclosures, the sealing of exterior enclosures which house the hermetic subenclosure may be either Grade A, B, or C of KSC-S-126. There shall be no conducting surface that is not protected by Grade B or C sealing of conductor insulation, potting, molding, conformal coating, or encapsulation or Grade A sealing in combination with Grade B or C.

**3.3.3 Nonsealed Units.** - Nonsealed switching devices may be used if completely enclosed in a compartment that is hermetically sealed in accordance with Grade A of KSC-S-126. This sealing may be provided by the sealing of the outer enclosure of the assembly case or any subenclosure down to the housing of the switching unit itself.

**3.3.4 Warning Label.** - All switching devices that are not sealed as specified in 3.3.2 of this standard, shall have a warning label legibly and permanently affixed. The warning label shall read, "NOT EXPLOSIONPROOF." The label shall be placed on the component assembly so that it is conspicuous after normal mounting, preferably near the nameplate or part number.

**3.3.5 Current and Voltage Rating.** - Switching devices shall be rated a minimum of 3 amperes resistive load or 1.5 amperes inductive load at 28 V dc for 10,000 cycles of operation.

**3.3.6 Voltage Drops.** - Under a rated resistive load as specified in 3.3.5, the associated load and contact drop shall not exceed 0.3 volt. The vendor shall certify that the design is capable of retaining a voltage drop of less than 0.5 volt after 10,000 cycles of operation. The switching device shall be functioned, as required, to enable testing of all contacts. Measurement shall be taken at terminals of a connector mated with the component connector while maximum-rated load current is maintained (see figure 1).

**Voltage Drop Test Procedure.** - Connections shall be made from the negative terminal of the power source to wire well A of the mating connector. The negative voltmeter probe shall be attached to wire well A reading with the sensor switch element deactuated. Connections from the power source negative and the meter probe shall be removed from the mating connector of wire A and shall be connected to wire well C for reading after the sensor switch has been actuated. The rheostat shall be in the greatest resistance, lowest current position; and the power switch shall be actuated or deactuated properly before closing the power switch for each contact test. Rheostat resistance shall be slowly decreased until the current increases to the switch elements rated current. At this time, the voltage drop readings shall be taken (see figure 1).

**3.3.7 Switching Assemblies Requiring a Power Source.** - Switching assemblies such as proximity, photo/mechanical, or others requiring a power source to operate an amplifier or other electrical conversion within the device shall be capable of operating continuously at an input voltage of 18 to 36 V dc.

May 30, 1990

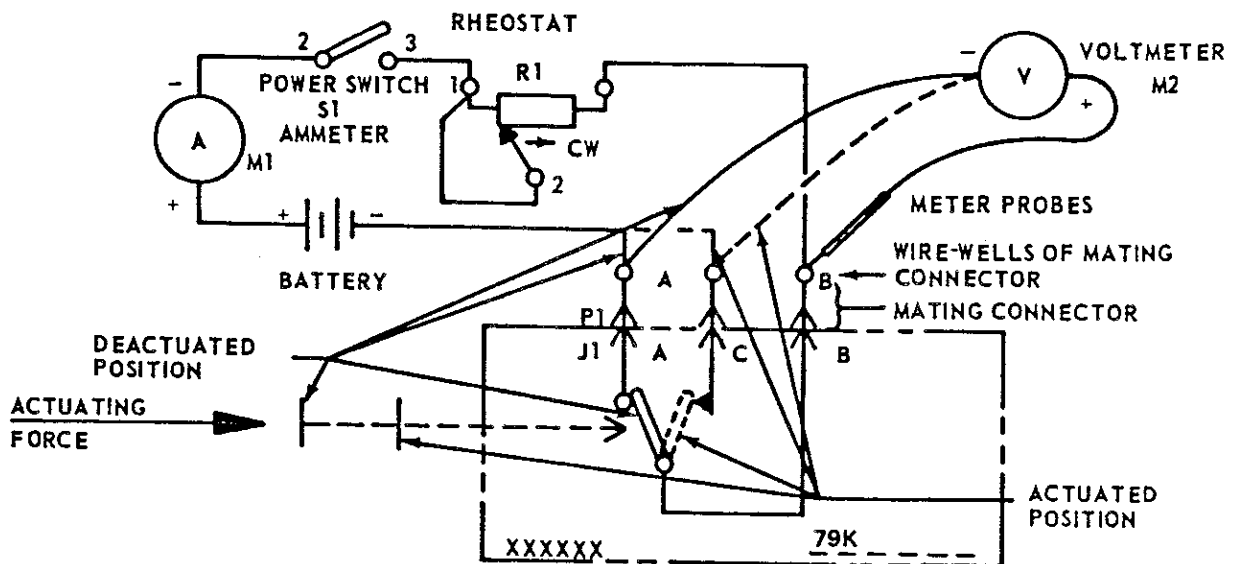


Figure 1. Typical Voltage Drop Test Setup

### 3.4 Position Indicators.

3.4.1 Sensor Position Indication. - Position indication shall be by positive actuation of a sensing device or switch operated by pressure, presence, or influence (mechanical, magnetic, or electromagnetic). In no case shall indication of position be assumed by a lack or absence of actuation. For example, a closed indication of a valve can only be given by a switch that is actuated by the valve being in the closed (tolerance of applicable) position. The normally open contacts of the switch would thus be closed. Either the normally closed contacts or the normally open contacts of this switch may be used in various circuits but never to indicate anything other than the closed position of this valve. The open position of the valve may be assumed by using the normally closed contacts of the same switch upon its deactuation. If more than one position indication is desired, an indicating device for each position shall be actuated when that position is attained by the component.

3.4.2 Sensor Actuation. - Cam-type devices may be used to actuate sensors as long as positive actuation of each position sensor is attained at the indicating position of the sensor. Cam detente linkages shall not be used to deactuate sensors at the indicating position of the sensors. For a component positioned by an actuating or piloting device that is either part of the assembly or separate, the positions of the component shall be indicated by sensors directly actuated by the position of the component.

3.4.3 Independence of Circuits. - Single-contact connectors shall not be used to accommodate part of a circuit if other parts of the same circuit are connected to any other connector or its component parts. Grounding (if specified) shall be wired to the last connector pin. In

no case shall ground or frame connections be connected to any switch circuit, coil, actuating, or sensing device. All actuating, sensing, and indicating circuits shall be insulated from the frame or ground by a minimum of 20 megohms, measured at a potential of 500 V dc.

3.4.4 Operating Voltage Requirements. - Position indicators shall function with any applied voltage from 18 to 36 V dc.

### 3.5 Potting Compound.

3.5.1 Material. - Material and procedure for potting the rear of connectors and for covering connections of switches shall be epoxy as specified in KSC-STD-132. Where adhesion of epoxy to components is impossible, transparent polyurethane in accordance with KSC-STD-132 shall be used. Other materials as specified on the individual control drawings and authorized by the responsible design organization may be necessary for special application.

3.5.2 Molds. - Dimensions and shapes of molds may vary for different applications, except that strain relief must be maintained from connection joint to wire insulation.

3.5.3 Coverage. - All potting, molding, and conformal coating of wiring and connections within any enclosure not sealed in accordance with Grade A of KSC-S-126 shall be capable of withstanding salt water or an explosive gas mixture leaking into and filling the enclosure.

### 3.6 Electrical Connectors.

3.6.1 Standard Connectors. - Unless otherwise specified, electrical connections to electromechanical components shall be made by utilizing connectors in accordance with MIL-C-5015 or MIL-C-26482, as required by the physical design of the unit and the maximum allowable number of contacts (6 per connector).

3.6.2 Hermetically Sealed Units. - Where hermetic sealing to a steel component body is required, the connector shall be 300 series, weldable stainless steel, passivated after welding to component and hermetically sealed in accordance with Grade A of KSC-S-126. The insulator shall be glass hermetically fused to shell structure and pins. The pin contacts shall be 300 series stainless steel or shall be comparable with corrosion resistant, nonmagnetic metal with outer plating of 0.0005-inch nickel. Pin dimensions shall meet the inspection requirements of 75M13302.


3.6.3 Connector Insulation. - Connectors that have metal dissimilar to that of the connector mounting area on the component assembly shall be insulated from the mounting surface by use of polychloroprene gaskets, in accordance with drawing 75M13308, and polychlorotrifluoroethylene hardware bushings as required to obtain a minimum of 20 megohms insulation at a potential of 500 V dc between the connector body and the component body. Connector mounting hardware shall be secured from vibration by using a sealing compound which meets the requirements of Grade B of MIL-S-22473 or by corrosion-resistant lockwire that is insulated with polytetrafluorethylene tubing to prevent the lockwire from causing an electrical



short between the hardware and the connector. Therefore, caution should be exercised to ensure all internal wiring and subenclosures are within the intent of this standard (3.3.2).

### 3.7 Pin Functions

**3.7.1 Single Solenoid With 2-Pin Connector.** - The connector terminating the solenoid coil shall be designated J1. The lead from the innermost winding layer shall be connected to pin A of the connector (negative), and the lead from the outermost winding layer shall be connected to pin B of the connector (positive). (See figure 2.)

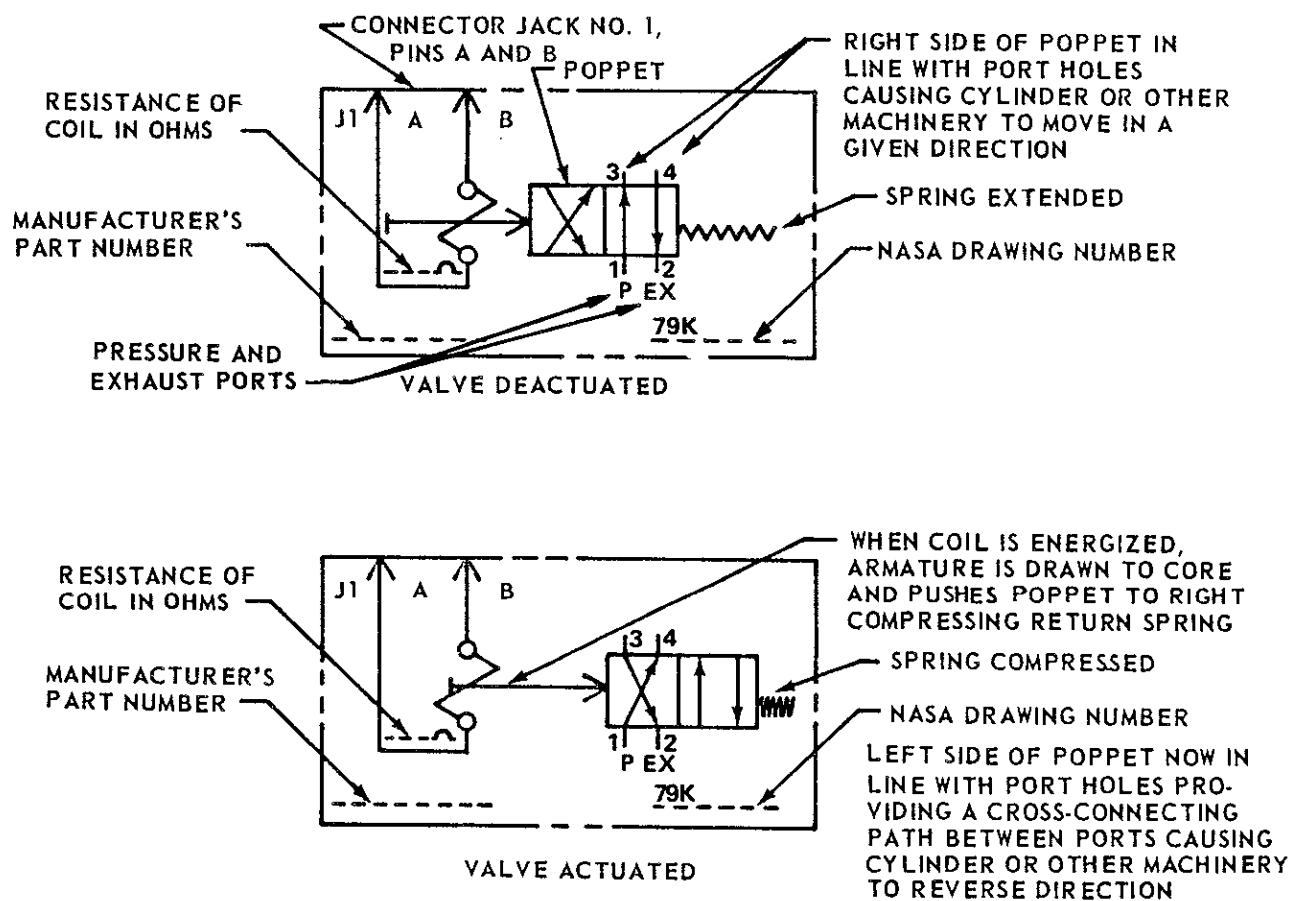

NOTE: NORMALLY SYMBOLS ARE ONLY SHOWN DEACTUATED.

Figure 2. Single Solenoid With 2-Pin Connector

**3.7.1.1 Single Solenoid and Indicator Switch With 2- and 3-Pin Connectors.** - In a single solenoid application (if a second connector is added to accommodate a position indicator switch), the first connector (J1) shall be wired as specified in 3.7.1. The added connector shall be a 3-pin connector and shall be compatible with the following external circuitry (figure 3): pin B shall be the switch common, pin C shall be a closed circuit to pin B when the solenoid is energized, and pin A shall be closed circuit to pin B when the solenoid is deenergized.

**3.7.1.2 Explanation of Operation.** - When the solenoid is deenergized, the return spring keeps the poppet and the position sensor switch positioned as shown in figure 3, and pressure port hole 1 and out port hole 2 are closed. When the solenoid is energized, the armature is attracted toward the core of the coil moving the poppet to the right, allowing the pressure from port 1 to pass out of port 2, actuating the sensor switch to connect J2 pin B to J2 pin C, and compressing the return spring. Conditions return to those shown in figure 3 when the solenoid is deenergized.

**3.7.2 Double Solenoid Valve With 3-Pin Connector.** - A double solenoid valve may have the leads from both solenoid coils combined into one 3-pin connector. Pin A shall be common to both solenoid coils, pin B shall be for the solenoid designated number 1 or A, and pin C shall be for the pin designated number 2 or B (figure 4).

**Explanation of Operation.** - The valve in figure 4 is shown with both solenoids deenergized; main valve ports 5, 6, 7, and 8 closed; both main valve positioning cylinders vented through pilots to exhaust ports 2 and 3; and cylinder pressuring ports 1 and 4 closed. If solenoid number 1 is energized, pressure is applied to the main valve cylinder through port 1 moving the main valve poppet to the right, connecting main port 5 to port 8, and connecting port 7 to port 6. All conditions as shown in figure 4 will return when the solenoid is deenergized. If solenoid number 2 is energized, pressure is applied to the main valve cylinder through port 4 moving the main poppet to the left, connecting main port 5 to port 7, and connecting port 8 to port 6. All conditions will return as shown in figure 4 when the solenoid is deenergized.

**3.7.3 Solenoid and Indicator Switch With 4-Pin Connector.** - In figure 5, a 4-pin connector is shown wired to a solenoid coil and indicator switch. Pins A and B are wired in accordance with figure 2, pin D is wired to switch common, and pin C is wired to the normally open contact. (See figure 5.)

**Explanation of Operation.** - Figure 5 shows the solenoid valve with the coil deenergized, the poppet to the left, and the sensor deactuated. The right side of the poppet is in line with the port holes, providing passage between ports 1 and 2 with port 3 closed. When the coil is energized, the armature is drawn toward the core moving the poppet to the right so that the left side of the poppet lines up with the ports, providing passage between ports 2 and 3, closing port 1, and compressing the return spring. Various modes of operation are available depending upon which ports are connected to the pressure, exhaust, and the apparatus being controlled by the valve.



KSC-STD-E-0004A  
May 30, 1990

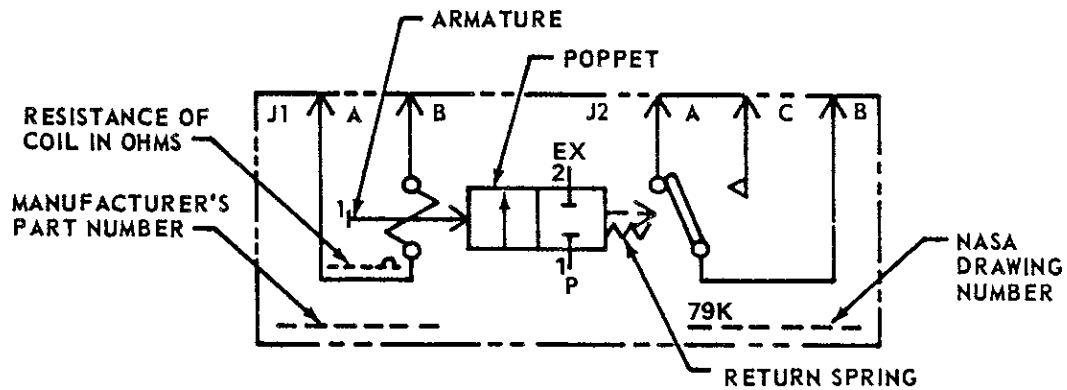


Figure 3. Single Solenoid and Indicator Switch With 2- and 3-Pin Connectors

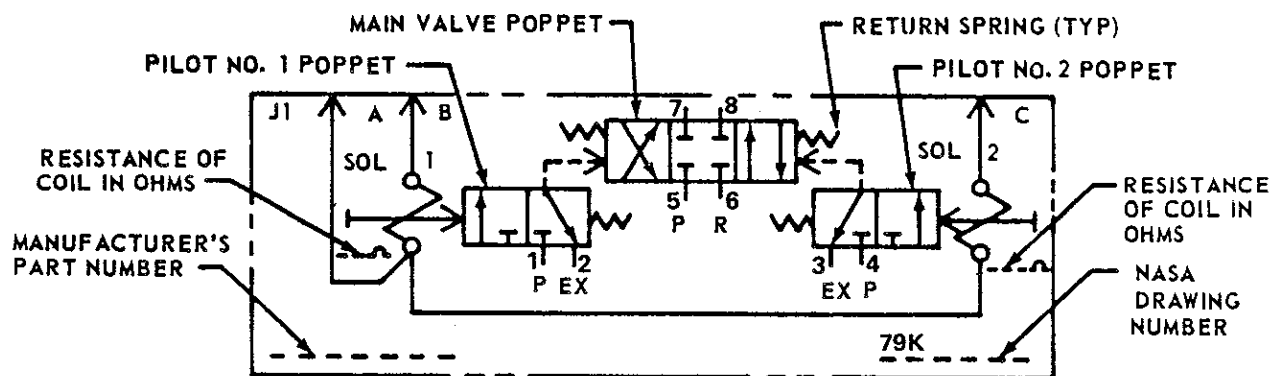


Figure 4. Double Solenoid Valve With 3-Pin Connector

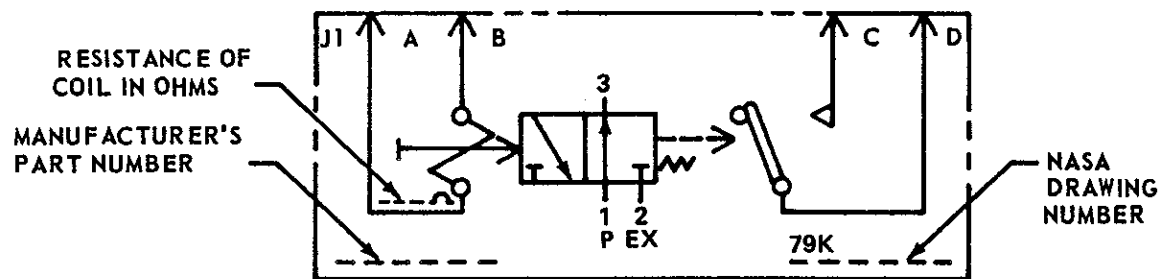


Figure 5. Solenoid and Indicator Switch With 4-Pin Connector

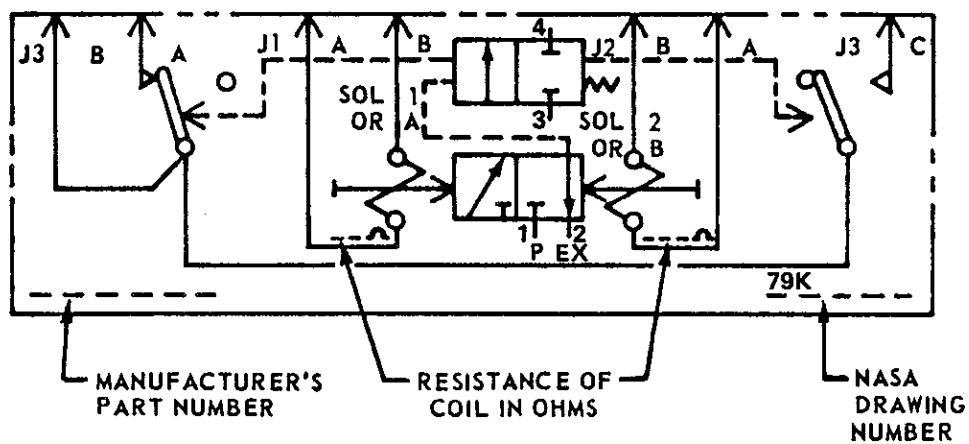


Figure 6. Double Solenoid Pilot Valve and Main Valve

KSC-STD-E-0004A

May 30, 1990

**3.7.4 Double Solenoid Valve With a 3-Pin Connector for Position Indication.** - A double solenoid valve may be wired with 3 connectors; one 3-pin connector for the position indicator switch and one 2-pin connector for each of the solenoid coils. Each of the 2-pin connectors shall be wired to the solenoid coils as shown in figure 2. Solenoid number 1 or A is connected to J1, and solenoid number 2 or B connected to J2. In connector J3, pins B and C present a closed circuit when solenoid number 1 or A is energized, and pins B and A present a closed circuit when solenoid number 2 or B is energized. (See figure 6.)

**Explanation of Operation.** - Figure 6 shows solenoid number 2 as being operated last, main valve ports 3 and 4 closed, and the main valve cylinder providing passage to pilot port 2 with port 1 closed. When solenoid number 2 is deenergized, neither valve changes position. When solenoid number 1 is energized, the pilot poppet moves to the right, allowing pressure to pass from pilot port 1 to the main valve cylinder, opening main ports 3 and 4.

**3.7.5 Solenoid and Indicator Switch With 5-Pin Connector.** - In figure 7, a 5-pin connector is shown wired to a solenoid valve and indicator switch. Pins A and B are wired to the solenoid coil as shown in figure 3. Pin D is wired to the switch common, pin C is wired to present a closed circuit between pins C and D when the solenoid is deenergized, and pin E is wired to present a closed circuit between pins D and E when the solenoid is energized (figure 7).

**Explanation of Operation.** - With the position sensor deactuated as shown in figure 8, the return spring keeps the armature and the poppet to the left; pressure port 1 is connected through the poppet to port 2; exhaust port 3 is closed; and J1 pin D is connected through the sensor switch to J1 pin C. When the solenoid is energized, the armature moves the poppet to the right, lining up the left side of the poppet with the ports, connecting port 2 to exhaust port 3, and closing pressure port 1. The poppet compresses the return spring and actuates the sensor switch, connecting J1 pin D to J1 pin E. When the solenoid is deenergized, the return spring extends, returning the poppet to the left and deactuating the sensor as shown in figure 7.

**3.7.6 Double Solenoid Valve With a 6-Pin Connector for Position Indication.** - A double solenoid valve may utilize a 6-pin connector for position indication, in addition to the two 2-pin connectors used for the solenoid coils. The leads from the coil of solenoid number 1 or A are connected to pins A and B of connector J1. The leads from the coil of solenoid number 2 or B are connected to pins A and B of connector J2. On 6-pin connector J3, pins B and C followed by pins E and F present closed circuits when the solenoid designated number 1 or A is energized. Pins E and D followed by pins A and B present closed circuits when the solenoid designated number 2 or B is energized (see figure 8).

**Explanation of Operation.** - The main valve poppet has no return springs and remains where last positioned. Pilot solenoid number 2 would have been energized last to position the main valve as shown in figure 8. Pilot poppets are as shown due to their return springs and neither solenoid is energized. Switch S2 is shown deactuated and S1 is shown actuated due to the position of the main valve to the left. When solenoid valve 1 is energized, pressure from

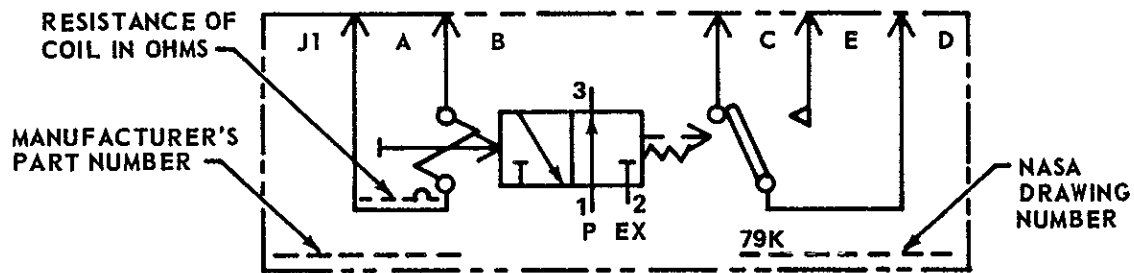


Figure 7. Solenoid and Indicator Switch With 5-Pin Connector

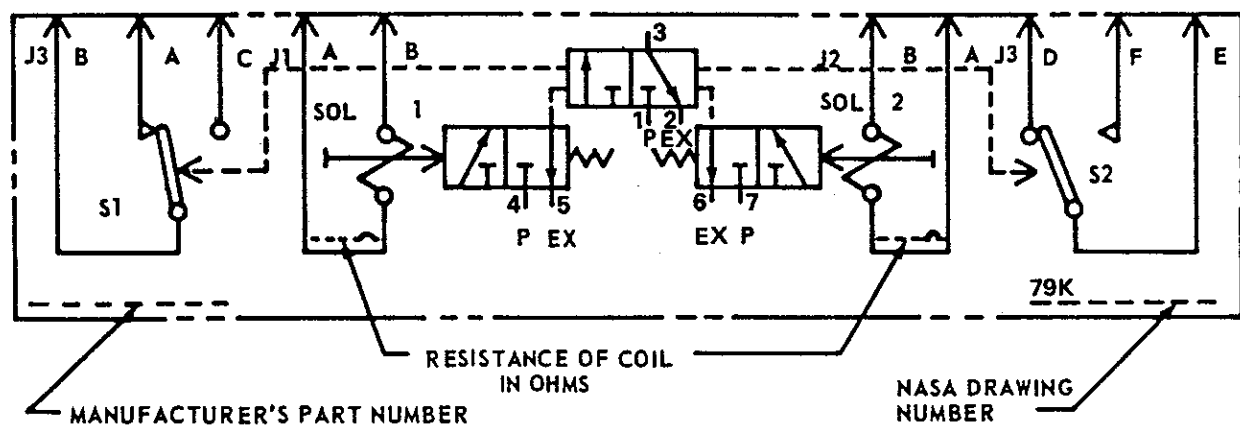


Figure 8. Double Solenoid Valve With a 6-Pin Connector for Position Indication

KSC-STD-E-0004A

May 30, 1990

pilot port 4 moves the main valve poppet to the right, applying pressure from main port 1 to port 2, closing exhaust port 3, and allowing S1 to deactuate and actuate S2. When solenoid number 1 is deenergized, main valves S1 and S2 remain unchanged until solenoid number 2 is operated to return them as shown in figure 8.

**3.7.7 Switches, Limit, Indicator, and Others.** - For single-pole, double-throw switches (figure 9), pin B shall be common. Pin B to pin C shall present a closed circuit when the switch is actuated, and pin B to pin A shall present a closed circuit when the switch is deactuated. For a double-pole, double-throw switch (figure 9), section 1 shall be wired as the single-pole, double-throw switch; section 2 shall be wired so that pin E is wired to switch common; pin E to pin F shall present a closed circuit when the switch is actuated; the pin E to pin D shall present a closed circuit when the switch is deactuated.

**3.7.8 Potentiometer-Type Transducers.** - For potentiometer-type transducers, a 3-pin connector is used for a single section or a 6-pin connector is used for a double section. Pin B shall be wired to the wiper of the first or single section. Pins A and B shall be wired so that the circuit A-B will present a minimum or low resistance with the wiper arm in the counter-clockwise or deactuated position. The circuit from pin B to pin C shall present a minimum or low resistance with the wiper arm in the clockwise or actuated position. If the potentiometer is a double-section type, pin E shall be wired to the second section wiper arm. The circuit from pin E to pin D shall present a minimum or low resistance with the wiper in the counterclockwise or deactuated position. The circuit from pin E to pin F shall present a minimum or low resistance with the wiper arm in the clockwise or actuated position, as shown in figure 10.

**3.8 Insulation Resistance.** - The insulation resistance of complete electrical assemblies, as measured at external mating connector contacts, shall be 20 megohms minimum, measured at 500 V dc, for all open circuits and from any circuit to component frame. Components shall be operated, as required, to permit testing of all possible open circuits. If the connector metal is dissimilar to the component metal, insulation shall be as specified in 3.6.3.

**3.9 External Markings.** - Marking symbols and methods shall be in accordance with KSC-STD-152 and KSC-STD-E-0015.

**3.9.1 Diagrams.** - Internal wiring of a component shall be depicted in schematic form on the outer surface of the component by decalcomanic, silk screen, stencil, or nameplate. The diagram shall clearly indicate the function of the solenoid coils associated with the proper ports. The diagrams shall conform to applicable schematics shown in this standard and KSC-STD-152.

**3.9.2 Connector Designations.** - The electrical connectors, carrying solenoid circuits, shall be marked with the lower numbered designations beginning with J1. Additional connectors shall be marked J2 and J3, as required, with position-indicating circuits occupying the higher jack numbers.

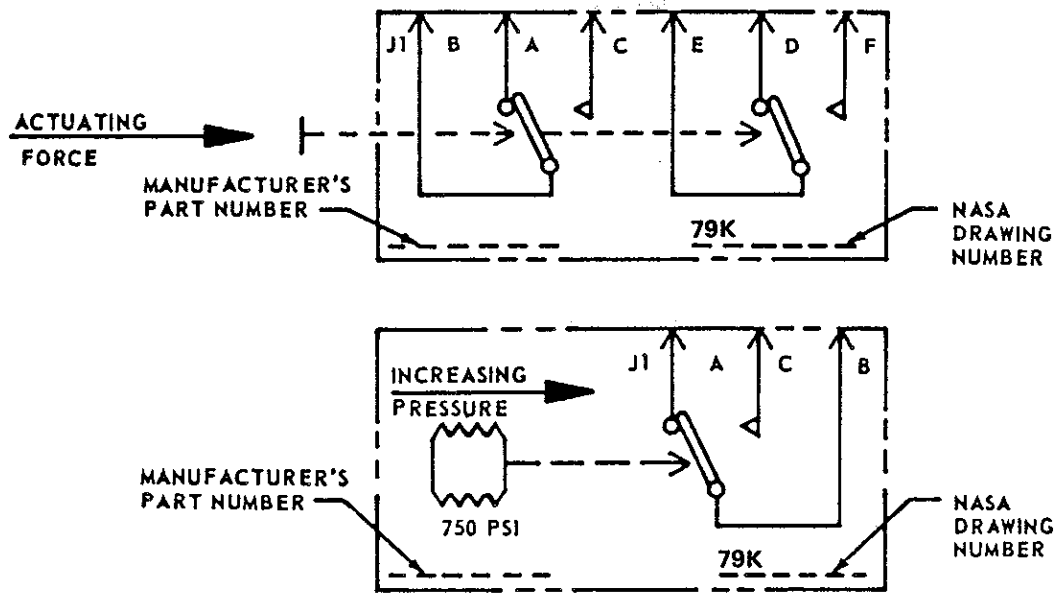


Figure 9. Switches, Limit, Indicator, and Others

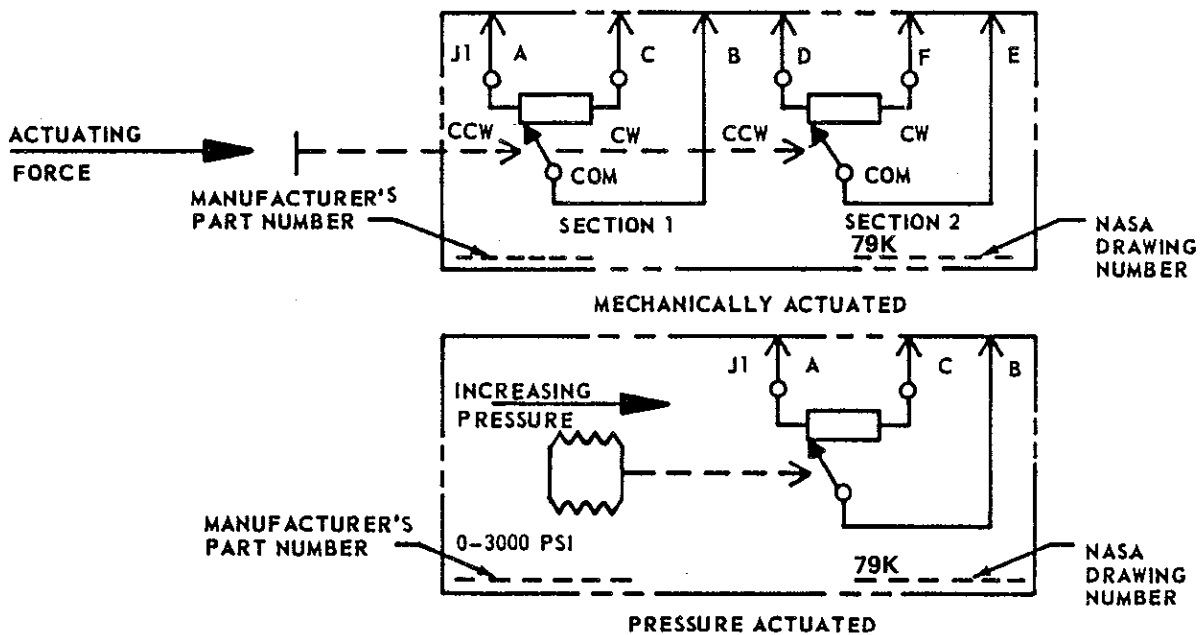


Figure 10. Potentiometer-Type Transducers

KSC-STD-E-0004A

May 30, 1990

3.9.3 Other Markings. - With the exception of those markings specified herein, other markings, such as mechanical find numbers or electrical reference designations, shall not be shown on the component in order to facilitate interchange of spares and replacements. Such markings may be applied adjacent to the components assembly.

3.10 Testing. - Acceptance and qualification testing shall be as specified in the individual item specification, standard, drawing, or other documentation as approved by the responsible design organization.

3.11 Documentation. - The vendor's top assembly drawing, representing the complete component, shall carry an internal wiring diagram clearly identifying the device, terminal markings, color coding of wires, (when multicolored wires are used), and the function of the indicator switch with relation to valve actuation or position.

#### 4. QUALITY ASSURANCE PROVISIONS

4.1 Inspectability. - The design shall ensure that all equipment, materials, parts, components, end items, systems, and related elements covered by this standard can be inspected and tested adequately to determine conformance to design requirements.

4.2 Integrity Control. - The design shall identify the equipment and systems, if any, to be placed under integrity control.

4.3 Inspections and Tests. - Special criteria, inspections, verifications or tests, including special test and inspection methods, required to assure quality or to fulfill the design intent shall be specified. When not specifically covered elsewhere, the following shall be required:

- a. Continuity and insulation resistance (isolation) tests performed in accordance with the requirements of KSC-E-165 and this standard. In the event of ambiguity or conflict between these two documents, this standard shall govern.
- b. Voltage drop tests performed as specified in 3.3.6.
- c. Soldering inspection performed as specified in KSC-STD-E-0010.

4.4 Contractual Provisions. - When this standard is invoked in a contract, the provisions of NHB 5300.4(1C), "Inspection System Provisions for Aeronautical and Space System Materials, Parts, Components, and Services" and/or NHB 5300.4(1B), "Quality Program Provisions for Aeronautical Space System Contractors" shall be invoked in the Statement of Work to the extent necessary and appropriate considering the hardware criticality and complexity, state of the art, cost, schedules, and the amount of research and development required. When not covered elsewhere, written procedures describing the methods and equipment to be used for inspections and tests performed under this standard shall be required to be submitted for approval prior to use.

## 5. PREPARATION FOR DELIVERY

Not applicable.

## 6. NOTES

6.1 Intended Use. - This standard is intended to establish uniform engineering practices and methods for the electrical design or modification of certain mechanical components at KSC.

6.2 Definitions. - For the purpose of this standard, the following definitions shall apply.

- a. Component. - The smallest assembled item identifiable as a complete, functioning, hardware entity that performs a distinctive function in the operation of an item of equipment or a system.
- b. Ground Support Equipment (GSE). - All equipment necessary to support the operations of receiving, handling, assembly, test, checkout, servicing, and launch of space vehicles.
- c. Nonconventional Facilities and Equipment. - Nonconventional facilities and equipment are program oriented or experimental in nature and comprise test facilities, launch complexes, operational or research facilities, towers, and similar special-purpose facilities or equipment whose structures are characterized by unusual or inadequately defined loading conditions, a lack of established design precedent, or frequent modifications to support changes in operational requirements.

**NOTICE**. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any right or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:

NASA - John F. Kennedy Space Center

Preparing Activity:

John F. Kennedy Space Center  
Electronic Systems Division  
Engineering Development Directorate