

**NASA
SPACE VEHICLE
DESIGN CRITERIA
(GUIDANCE AND CONTROL)**

NASA SP-8015

**GUIDANCE AND NAVIGATION
FOR ENTRY VEHICLES**



PROPERTY OF
MSFC LIBRARY

NOVEMBER 1968

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

FOREWORD

NASA experience has indicated a need for uniform criteria for the design of space vehicles. Accordingly, criteria are being developed in the following areas of technology:

Environment
Structures
Guidance and Control
Chemical Propulsion

Individual components of this work will be issued as separate monographs as soon as they are completed. This document, Guidance and Navigation for Entry Vehicles, is one such monograph. A list of all monographs in this series issued prior to this one can be found on the last page of this document.

These monographs are to be regarded as guides to design and not as NASA requirements, except as may be specified in formal project specifications. It is expected, however, that the criteria sections of these documents, revised as experience may indicate to be desirable, eventually will become uniform design practices for NASA space vehicles.

This monograph was prepared by Kaman AviDyne under the cognizance of the Electronics Research Center, an ad hoc committee chaired by Prof. Arthur E. Bryson, Stanford University. The following members assisted:

F. J. Carroll	NASA, Electronics Research Center
J. Zvara	Kaman AviDyne
A. Black	Boeing Co.
P. Blatt	AF Flight Dynamics Laboratory
R. Bohling	NASA, Office of Advanced Research and Technology
M. Burke	NASA, Flight Research Center
J. Kanter	NASA, Office of Advanced Research and Technology
D. Lickly	MIT, Instrumentation Laboratory
R. Morth	MIT, Instrumentation Laboratory
D. Rosamond	McDonnell Douglas Corporation
R. Wingrove	NASA, Ames Research Center

Comments concerning the technical content of these monographs will be welcomed by the National Aeronautics and Space Administration, Office of Advanced Research and Technology (Code RVA), Washington, D.C. 20546.

November 1968

CONTENTS

	<u>Page</u>
1. INTRODUCTION	1
2. STATE OF THE ART	2
2.1 Entry Guidance Methods	2
2.2 Mercury Entry Guidance and Navigation	3
2.2.1 System Hardware and Operation	4
2.2.2 Flight Experience	4
2.3 Gemini Entry Guidance and Navigation	6
2.3.1 System Hardware and Operation	6
2.3.2 Guidance Technique	9
2.3.3 Flight Experience	10
2.4 Apollo Entry Guidance and Control	12
2.4.1 System Hardware	13
2.4.2 System Operation	15
2.5 ASSET Guidance	17
2.6 PRIME Guidance	18
2.7 Summary	19
3. CRITERIA	20
3.1 Performance	20
3.2 Crew Safety	21
3.3 Additional Considerations	22
4. RECOMMENDED PRACTICES	23
4.1 Performance	23
4.1.1 Entry Flight Profile	23
4.1.2 Operational Boundaries	25
4.1.3 Error Analyses	28
4.1.4 Mathematical Models for Performance Analysis and Simulation	31

	<u>Page</u>
4.2 Crew Safety and Mission Success	31
4.2.1 Probability of Successful Operation	31
4.2.2 Single-Point Failure Analysis	31
4.2.3 Redundancy	32
4.2.4 Malfunction Detection Systems	33
4.3 Additional Recommendations	33
4.4 System Design	34
4.4.1 Conceptual Design	34
4.4.2 Preliminary Design	35
4.4.3 Detail Design and Development	36
4.4.4 Integration and Tests	37
REFERENCES	39
NASA Space Vehicle Design Criteria Documents Issued to Date	43

GUIDANCE AND NAVIGATION FOR ENTRY VEHICLES

1. INTRODUCTION

The guidance and navigation (G&N) system for vehicles entering the Earth's atmosphere must provide steering commands which cause the spacecraft to reach the desired landing point with specified accuracy without compromising the vehicle structural integrity or endangering the crew. Inadequate guidance during entry can cause large deviations from the desired touchdown area, excessive aerodynamic heating of the vehicle, deceleration in excess of crew tolerance limits, or, in the extreme, the loss of the spacecraft and its crew.

Important factors that influence the design of entry G&N systems include:

- Entry velocity and flightpath angle
- Vehicle aerodynamic and mass characteristics
- Vehicle heating and loading limitations
- Crew deceleration tolerance limits
- Characteristics of Earth and its atmosphere
- Type of control available
- Type of terminal landing system
- Orbit parameters and location of the desired landing site
- Terminal accuracy requirements
- Crew safety and mission success requirements
- Equipment performance

Experience has shown that uncertainties in vehicle characteristics, particularly in the lift-drag (L/D) ratio, have a profound effect on the guidance performance. Uncertainties in atmospheric variations and imperfect execution of retrofire and steering control commands also affect guidance performance. Navigation errors arise from initial inertial platform alinement errors, gyro drift, accelerometer errors, and inaccurate knowledge of the initial position and velocity at the beginning of entry.

The entry G&N system should make effective use of sensing, data processing, and display equipment required for other mission phases, so that a minimum of additional equipment is

required for performing the entry G&N function. It should take maximum advantage of onboard as well as Earth-derived information to generate the desired flightpath to the landing site within specified accuracy requirements. It should be as insensitive as possible to uncertainties in those parameters over which the G&N designer has no control, in particular, vehicle L/D. Provision for pilot monitoring and participation in entry guidance should be included to take maximum advantage of the pilot's capability.

The scope of this document is limited to the atmospheric entry phase of flight for vehicles with maximum L/D ratios less than 1.5. The end of entry is assumed to occur at 100 000 feet for horizontal landing vehicles, and at deployment of the terminal landing system (parachute, paraglider, etc.) for low L/D vehicles. Some discussion of the deorbit maneuver as it affects the entry G&N function is included, but detailed aspects of retrofire for deorbit will be covered in a separate monograph dealing with thrusting maneuvers in space.

The entry G&N system is primarily concerned with the motion of the vehicle center of mass along a desired flightpath. It is closely coupled with the entry stabilization and control (S&C) system which is concerned with vehicle attitude motions about the center of mass. The S&C problem for Earth entry is the subject of another monograph.

2. STATE OF THE ART

The state of the art of atmospheric entry G&N is composed of a body of theory coupled with actual flight experience characterized by the NASA Mercury, Gemini, and Apollo programs, and the USAF ASSET (Aerothermodynamic/elastic Structural Systems Environmental Tests) and PRIME (Precision Recovery Including Maneuvering Entry) programs. Each of these programs is briefly described and appraised.

2.1 Entry Guidance Methods

Reference 1 is a comprehensive survey of 98 publications related to the entry guidance problem. The guidance methods are presented there under two general classifications: guidance using a nominal trajectory and guidance using prediction by either fast-time solution or approximate closed-form solution of the equations of motion. The reference concludes that the choice of which type to use depends on considerations such as the size and speed of the onboard computer, the range of entry conditions which the guidance system must be capable of handling, the flexibility to maintain trajectories with desired heating or acceleration profiles, and the information that the guidance equations give the pilot. It is possible that an entry guidance logic will use elements of both techniques.

Guidance about nominal trajectories provides a simple guidance method that can be designed to handle many off-design conditions. In this method the state variables along the nominal path are precomputed and stored onboard the spacecraft. The variations in the measured variables from the stored values are used in the guidance logic either to control the spacecraft back to the nominal trajectory (path controller) or to establish a new trajectory to reach the destination (terminal controller). For this guidance logic, a desirable nominal trajectory must be selected prior to entry. The selection of the nominal may be influenced by operational considerations and/or by optimization procedures.

Constant feedback gains for guidance, or time-varying feedback gains, optimized either as a terminal controller or as a path controller about the nominal trajectory may be used. The use of many stored trajectories and stored feedback gains implies a large onboard storage requirement. Studies have shown that with proper selection of control variables, only a very small number of reference trajectories may be necessary for all anticipated entry conditions, thus requiring only a modest storage capacity.

In most cases the method of guidance using fast-time prediction is capable of handling a wider variety of entry conditions than the guidance about a nominal trajectory. This guidance technique predicts the path by which the vehicle will reach the desired destination without violating the heating and acceleration limits. Trajectory prediction may be accomplished by a rapid forward integration of the equations of motion for the remainder of the flight, or by using an approximate empirical equation derived from many numerical solutions to the equations of motion.

The main advantages of the fast-prediction method are (a) it is able to handle any possible flight condition; (b) range prediction as well as the anticipated acceleration or heating problems can be obtained from any flight condition; and (c) good display information for pilot decisions is provided.

The principal disadvantage of this method is the requirement for speed in the computer. The use of empirical equations reduces the required computational speed and flexibility of the guidance system.

Results of entry G&N studies published subsequent to reference 1 such as references 2 to 7 reinforce the conclusions of reference 1 concerning the relative advantages or disadvantages of the different guidance schemes.

2.2 Mercury Entry Guidance and Navigation

The Mercury project utilized retrorockets to deorbit, a ballistic ($L/D = 0$) configuration during entry, and vehicle recovery at sea after terminal descent by parachute. The entry

G&N requirements included determination of the orbit, the time of retrofire and the direction of retrofire to insure that landing would occur in the desired recovery area. No guidance was possible after the deorbit maneuver. However, the vehicle was rolled during entry (15° per second after 0.05-g deceleration) to minimize landing dispersions. A brief description of the system hardware, operation, and flight experience is presented. More detailed information may be found in references 8 to 10.

2.2.1 System Hardware and Operation

The system components used for Earth return were the spacecraft clock and a navigational reticle. Secondary equipment, which included navigational charts and tables, an altimeter, a longitudinal accelerometer, and attitude displays and attitude-rate displays, were available for use in contingencies and for entry monitoring. The normal entry sequence was controlled by commands from the clock. Manual or ground command retrofiring was provided for contingencies. The navigation reticle was an optical device used to check when the spacecraft was at the correct attitude for retrofire. Use of the reticle, a landmark, and the horizon enabled the astronaut to manually aline the vehicle in pitch, yaw, and roll attitude.

The entry sequence started by positioning the spacecraft to the retrograde attitude of 34° pitch, 0° roll or yaw. The three rockets provided a retrograde ΔV of approximately 500 ft/sec.

Following deorbit the spacecraft was positioned to the entry attitude of 1.6° pitch. It was maintained in this attitude until a 0.05-g switch indicated entry into the atmosphere. At this point attitude hold was cut off and a rate command control mode in roll was initiated, while using rate damping in pitch and yaw. This mode was terminated at about 40 000 feet when a drogue parachute was deployed to stabilize terminal descent in preparation for main parachute deployment at 10 000 feet. About 20 minutes elapsed between retrofire and landing and a range of approximately 3000 nautical miles was covered.

The contributions of different parameters to landing point dispersion for a Mercury-type ballistic entry vehicle returning from a near-Earth orbit are presented in table I. The sources of error listed are considered sufficiently independent that they may be combined as the root sum of squares. The data in table I show the relative contributions of the different error sources as determined from error analyses.

2.2.2 Flight Experience

Apogee, perigee, and landing errors for each of the four manned orbital flights is shown in table II. Only the MA-8 entry was performed as planned with the automatic stabilization

TABLE I.—Ballistic Entry Vehicle Dispersions

Error source	Tolerance	Dispersion contribution (n. mi.)		
		Overshoot	Undershoot	Cross-range
Orbit elements:				
Perigee altitude	± 0.5 n. mi.	11.0	11.0	----
Eccentricity	± 0.0001	15.6	15.6	----
Inclination	$\pm 0.10^\circ$	----	----	6.0
Retro attitude:				
Pitch angle	$\pm 6.9^\circ$	65.0	10.0	----
Yaw angle	$\pm 8.1^\circ$	----	----	15.0
Retro velocity	$\pm 2.4\%$	85.0	85.0	----
Retro position:				
Downrange	± 5 n. mi.	5.0	5.0	----
Cross-range	± 5 n. mi.	----	----	5.0
Drag coefficient	$\pm 10\%$	5.8	5.8	----
Atmosphere variation	$\pm 50\%$	15.4	15.4	----
Winds		2.5	2.5	4.0
Root sum of squares		110.1	89.4	17.4

TABLE II.—Summary of Mercury
Manned Orbital Flights

Flight	Apogee, n. mi.	Perigee, n. mi.	Landing error, n. mi.
MA-6	140.9	86.9	-40
MA-7	145	86.8	+250
MA-8	152.8	86.9	-4
MA-9	144.2	87.2	-1

and control system (ASCS) and all associated sensors and thrusters performing correctly. In the other flights manual control backup was required because of various problems.

Flight MA-7 had the largest landing-point error. During most of the flight, the spacecraft ASCS performed satisfactorily until, late in the third and final orbital pass, the pilot noted the spacecraft true attitude and indicated attitude in pitch were in disagreement. Because this control system problem was detected just before retrofire, no corrective action was possible and the astronaut was forced to provide manual attitude control, using the window and horizon as the attitude reference, for the retrofire maneuver. Retrofire occurred about 3 seconds late and the optimum spacecraft attitudes were not maintained during retrofire. As a result, the spacecraft landed about 250 miles downrange of the planned landing point.

Similarly, flight MA-9 experienced difficulties with the ASCS that required manual retrofire and reentry. However, the pilot was sufficiently forewarned and was able to perform these maneuvers with close precision. As seen in table II, MA-9 landed within 1 nautical mile of the planned landing area.

2.3 Gemini Entry Guidance and Navigation

One of the objectives of the Gemini program was the development of a controlled entry capability. A symmetrical body entry vehicle with its center of mass offset from the centerline was used. The vehicle thus trimmed at an angle of attack that resulted in an average $L/D \cong 0.19$. Landing-point control during entry was accomplished by rolling the vehicle to give the desired vertical and lateral components of lift. Information on the entry G&N aspects of the program presented in references 11 to 17 is summarized in the following section.

2.3.1 System Hardware and Operation

A functional diagram of the entry guidance and control system for Gemini is given in figure 1. The G&N portion of the system consisted of a general-purpose digital computer coupled to an inertial measurement unit (IMU).

The digital computer operated at a 500-kilohertz arithmetic bit rate and had a memory capacity of 4096 words. After Gemini 7, because of a need to provide flexibility for mission planning, an auxiliary magnetic tape memory with storage capacity for several additional guidance programs was added. Triply redundant data storage with majority voting was used. More than 1 million bits of information could be stored. As mission phases were completed, new programs could be transferred from the tape into the computer memory at a rate of

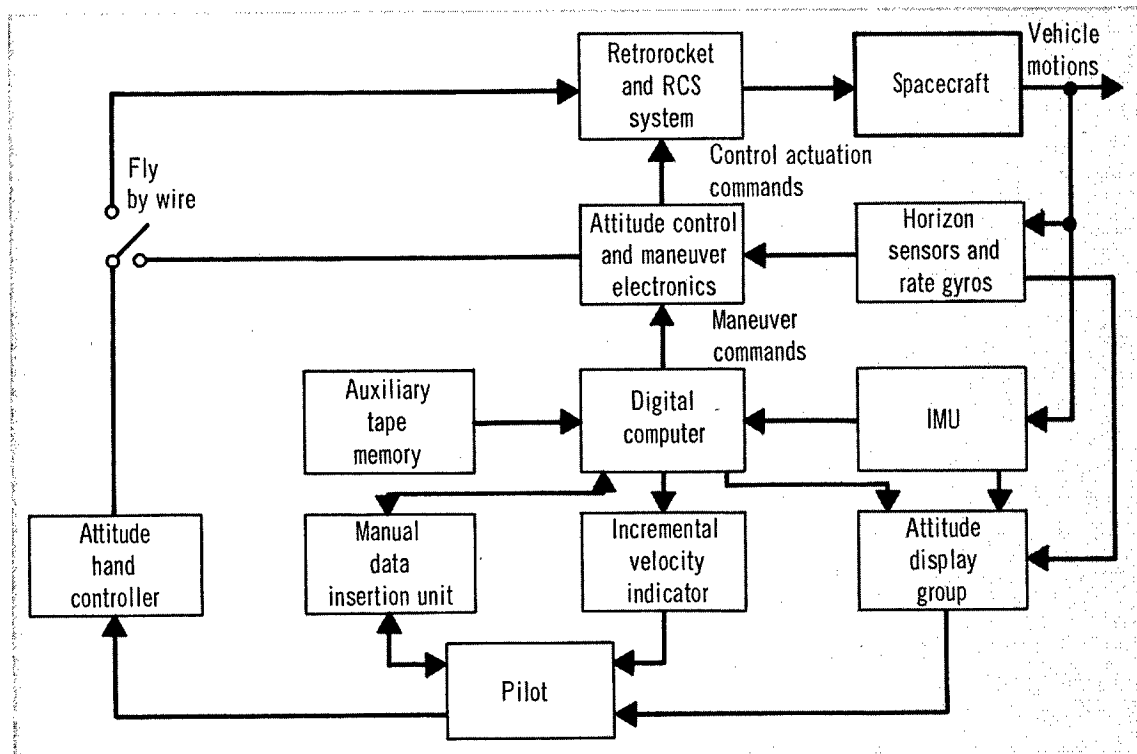


Figure 1.—Gemini entry guidance and control system functional block diagram.

600 bits per second. A program stored in computer memory could be verified by comparing it with an identical program stored on tape requiring, at most, 6 minutes.

Data flow and interfaces for the entry G&N system are shown in figure 2. The IMU, consisting of a four-gimbal platform, electronics, and power supply, was hard mounted to the spacecraft. The inner gimbal supported three orthogonally mounted integrating gyros and pendulous accelerometers. The electronics controlled the gimbal servos and converted accelerometer signals to pulse form, each pulse representing a change in velocity of about 0.1 ft/sec.

The computer sampled the accumulated pulses every computer cycle, applied the necessary platform misalignment correction, and included the resulting velocity increment in the navigation computations. Prior to retrofire, the platform was aligned to the local vertical and the orbit plane. The platform was set free at retrofire thereby establishing the inertial reference coordinate system.

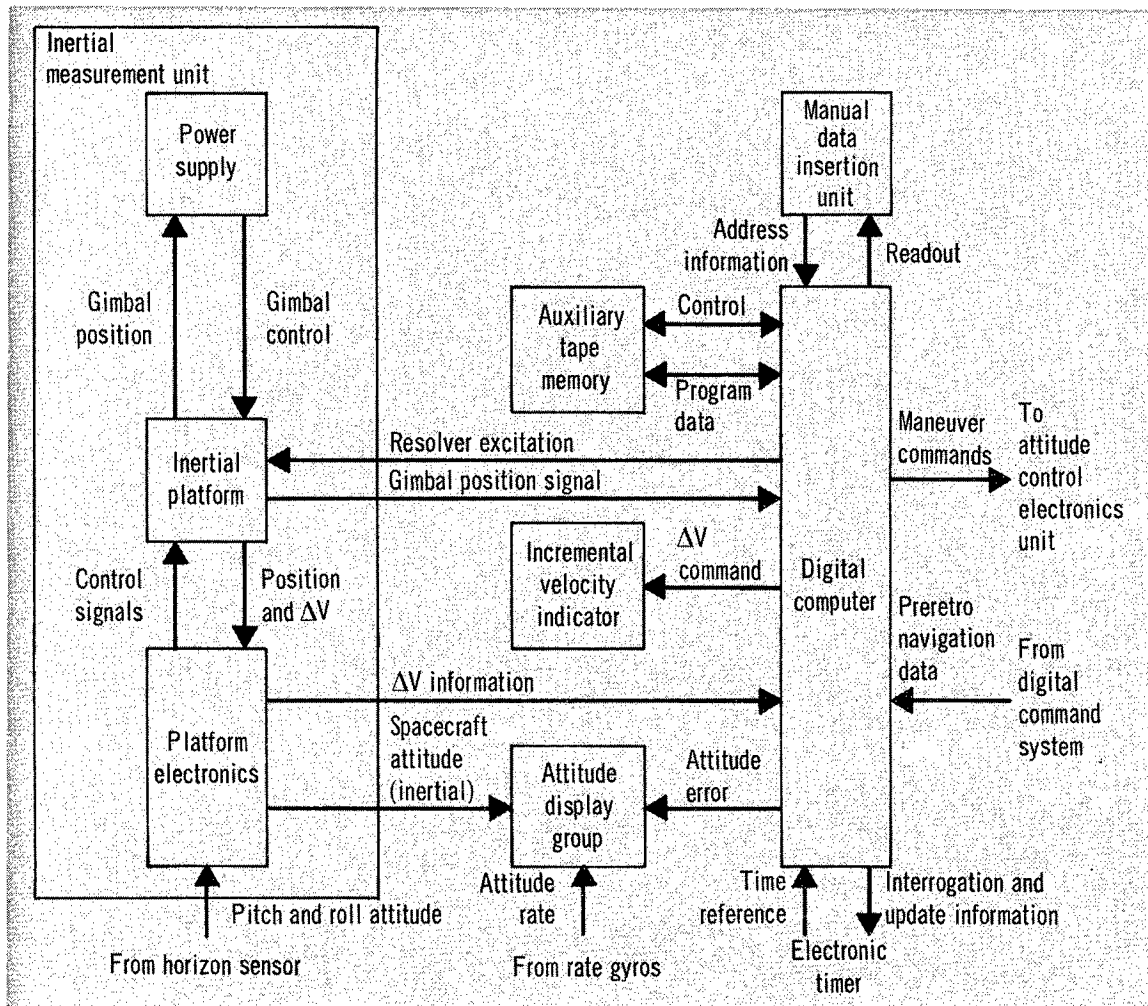


Figure 2.—Gemini entry G&N system data flow.

The Gemini landing-point control concept used vehicle lift to control range. For maximum range the spacecraft maintained a headsdawn uplift condition at 0° bank angle. Minimum range was obtained using a continuously rolling entry (zero average lift in the vertical plane). Downlift at 180° bank angle was not used because it led to excessive deceleration and very little range reduction.

Entry control was designed to be performed primarily by the pilot reacting to displayed guidance commands. However, an automatic entry control mode was also provided in which the computer was directly coupled to the attitude control and maneuver electronics. The

onboard computer was updated prior to retrofire with the desired touchdown coordinates and the spacecraft's position and velocity through the digital command system from the ground or through the manual data insertion unit. Sequential firing of the four retrorockets, initiated automatically when the time to retrofire reached zero, gave a ΔV of about 320 ft/sec. The measured retrofire velocity increment was displayed to the crew on the incremental velocity indicator.

Above 400 000-foot altitude, an estimated drag deceleration, based on a stored air density profile, superseded the data from the IMU. At a navigated altitude of 400 000 feet, the computer again accepted IMU data and began entry guidance computations. When the measured drag deceleration reached about 1.0 ft/sec², the computer began generating steering commands. At a navigated altitude of 80 000 feet, entry guidance was terminated since only negligible maneuver capability remained. After a ballistic descent to an altitude of 50 000 feet, the drogue chute was deployed to stabilize the spacecraft for main chute deployment, which occurred at an altitude of 10 600 feet.

Table III gives the results of an error analysis made to determine how different errors affected Gemini downrange and cross-range touchdown accuracy starting from a 161-nautical-mile orbit. These data illustrate the relative error contributions of the various error sources.

2.3.2 Guidance Technique

Two different techniques were developed and used during the Gemini program for steering between 400 000 and 80 000 feet: a constant bank angle technique and a zero lift range prediction technique (refs. 15 and 16).

The constant bank angle technique uses a computed bank angle, with sign reversal, for range control to an 80 000-foot altitude, to guide the spacecraft along a computed trajectory to the target.

The zero range prediction technique uses lift to null predicted terminal errors as soon as possible. When the errors are nulled, a ballistic trajectory (zero lift) is flown to the target.

The constant bank angle technique is more sensitive to uncertainties in L/D because of its proportional nature. If the L/D is seriously lower than predicted, it may dissipate so much capability early in the entry that it cannot correct the terminal errors with the available lift near the end of the entry.

TABLE III.—Representative 3σ Errors and Resulting Landing Dispersions for Gemini Entry From Orbit

Error source	Tolerance	Dispersion contribution (n. mi.)	
		Overshoot ^a	Cross-range
Retrograde initial conditions:			
Altitude	2100 ft	28.6	3.5
Velocity	3 ft/sec	39.6	4.7
Flightpath angle	0.015°	32.8	4.2
Azimuth	0.036°	-.3	2.0
Longitude	0.012°	-.6	.1
Latitude	0.003°	-.1	.05
Retrorocket attitude	5.0°	90.4	13.6
Retrorocket impulse	3%	-134.5	13.6
Atmospheric density	60%	-40.4	5.3
Spacecraft weight	1%	43.2	5.2
Aerodynamic coefficients	20%	-27.1	3.4
Lift vector orientation	7.5°	20.4	4.0
Bank angle attitude	5.0°	31.1	.7
Time of bank reversal	4 sec late	-.1	1.7
High-altitude winds		4.6	.5
Root sum of squares		188.0	22.6

^aNegative sign indicates undershoot.

2.3.3 Flight Experience

A summary of the Gemini manned orbital flights is presented in table IV. Total time from deorbit to drogue chute deployment on these flights varied from 29.0 to 32.5 minutes. Only about 10 percent of this time, however, was available for utilizing the lift capability. Approximately 80 percent of the range-control capability occurred at an altitude between 250 000 and 170 000 feet. The last 20 percent of capability, below 170 000 feet, is very important since range prediction becomes more accurate as the target is approached.

The actual L/D of Gemini III was 35 percent lower than the predicted value. This resulted in a loss of approximately 160 nautical miles in the spacecraft's maneuverability, and

TABLE IV.—Summary of Gemini Manned Orbital Flights

Flight	Orbit at retrofire		Guidance technique	Landing errors, n. mi.
	Apogee n. mi.	Perigee n. mi.		
III			Zero lift range prediction	^a 60
IV			↓	^b 44
V			Constant bank	^c 91
VI-A	161	161	↓	7
VII	161	161	↓	6.4
VIII	161	161	Zero lift range prediction	1.1
IX-A			↓	.4
X	215	161	↓	3.4
XI	165.7	156.3	↓	2.6
XII	163.6	159.0	↓	2.6

^aPilot directed to ignore guidance commands.^bComputer failed.^cErroneous update from ground.

contributed to the miss distance of 60 nautical miles. In Gemini VII, a 40-nautical-mile loss of maneuverability occurred because of an incorrect computation of the change in spacecraft center of mass over the 14-day mission.

The landing point dispersion pattern is shown in figure 3. The Gemini IV mission had a computer failure in orbit necessitating manual entry, rolling at a constant rate of 15° per second. Thus there was no way to compensate for the preretro and retro errors, and the spacecraft landed 44 nautical miles uprange from the intended landing point.

The Gemini V flight had the largest landing error. This, however, was almost entirely caused by a 474-nautical-mile error in navigational update before retrofire.

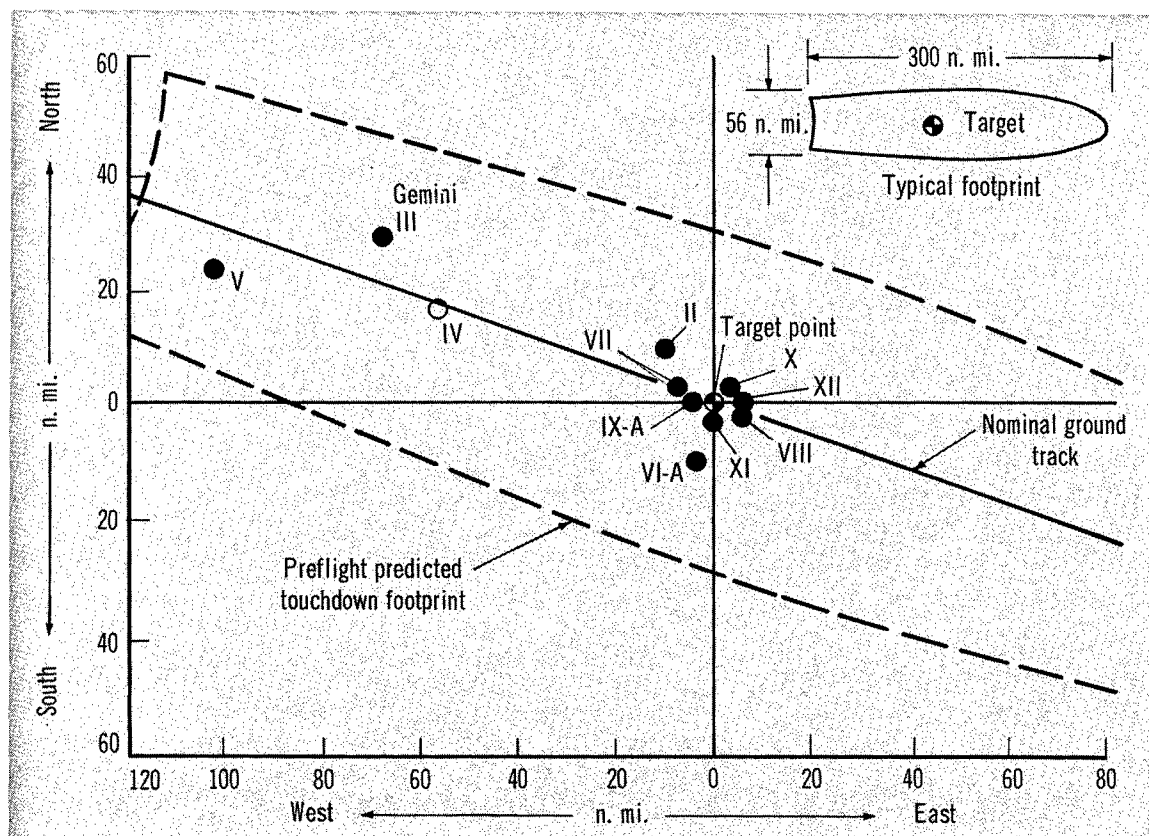


Figure 3.—Relative landing points for Gemini flights.

Flight experience has indicated that accurate estimates of L/D are very difficult to make. The constant bank-angle guidance technique is too sensitive to changes in L/D and hence is not recommended. Uncertainty in L/D arises from uncertainty in location of vehicle mass center, center of mass variation during flight, and uncertainties in spacecraft aerodynamic characteristics. The zero lift range prediction technique does not require a knowledge of the spacecraft lift capability, and would steer to a particular target as long as that target was within the footprint.

2.4 Apollo Entry Guidance and Control

The Apollo entry vehicle, like Gemini, is a symmetrical body with an offset center of mass which accomplishes landing-point control by rolling the vehicle. However, the supercircular entry velocity of Apollo lunar flights places additional requirements on the entry G&N

system. Initial designs of the G&N system were based on a vehicle $L/D = 0.5$. The average L/D on the vehicle flown has been approximately 0.28. Information on the entry G&N system presented in references 18 to 23 is summarized below.

2.4.1 System Hardware

In the Apollo block I design (fig. 4), guidance signals went through the stabilization and control (S&C) system to operate the service module propulsion engine and reaction jets; hence, a failure in the S&C system would incapacitate the primary guidance system and require use of backup procedures. In the block II design (fig. 4) the capability of the guidance computer was increased so that it could also perform the S&C task. The block I S&C system became a backup system for manual and semiautomatic operation. The block II configuration will be used in all lunar flight models. If a malfunction should occur in the guidance system, the astronauts will be able to perform many of the guidance functions using the S&C system. Block II design uses two nonidentical systems to achieve redundancy.

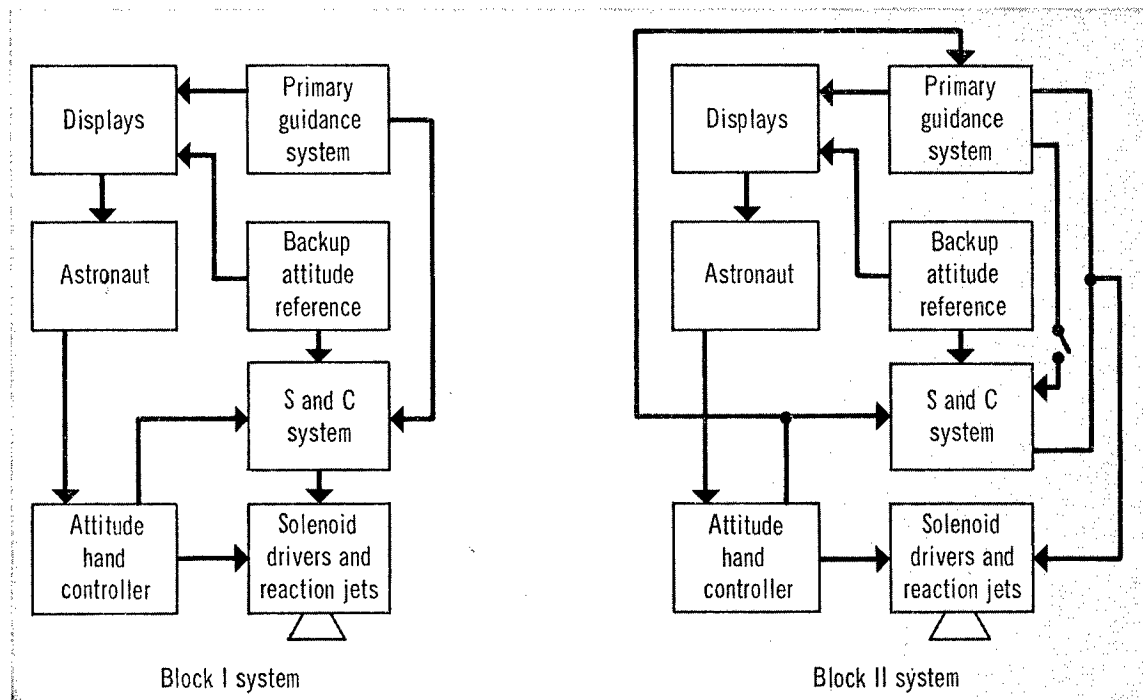


Figure 4.—Apollo guidance and control system designs.

The block II G&N system consists of the Apollo guidance computer (AGC) coupled to an inertial measuring unit (IMU). An electronic time reference system is contained as part of the computer. The AGC is a general purpose digital computer with a fixed memory capacity of 38 864 words. Memory cycle time is 12 microseconds. Instructions and single-precision arithmetic operations are based on a 16-bit word length.

The original computer design included provisions for onboard maintenance. This feature was eliminated since it increased the size and weight of the computer, and made it more susceptible to failure (it could not be hermetically sealed and would require more electrical connectors). The extremely high reliability of the AGC, coupled with the block II S&C backup capability, prompted a decision not to carry a second (backup) guidance computer.

The primary IMU consists of a three-gimbal inertial platform (containing rate integrating gyros and pulse rebalanced pendulous accelerometers), navigation base, system electronics, and power supply. Gimbal lock is avoided by occasional gimbal realignment and maneuver restrictions. Since the IMU is normally not functioning during the long coasting periods, it is alined in flight using a star reference before each acceleration period (thrusting maneuvers or atmospheric drag). In the block I design the IMU is supplemented by an orthogonal strapped-down gyro system which is used primarily by the S&C system. This system is adequate for most guidance functions and it backs up the primary IMU.

The interface between the AGC and the astronaut navigator is the display and keyboard (DSKY). It contains three registers for displaying vector components, each containing five decimal digits (which is sufficient to display a 15-bit word). Both data and commands are entered into the computer via the keyboard. The display is used by the computer to request action from the operator and to respond to interrogative commands.

An entry monitoring system (ref. 23) will enable the astronauts to detect impending unacceptable trajectory characteristics such as excessive accelerations or an uncontrolled atmospheric skip in sufficient time to prevent their occurrence. This backup system is intended to be at least an order of magnitude more reliable than the primary system. It will also provide gross range control in the event of a primary guidance system malfunction. The basic parts of the system are:

- (1) A signal that is excited when measured acceleration exceeds some nominal value.
- (2) Two signals which are used to indicate whether the flightpath is at the top or bottom of the entry corridor.
- (3) A bank angle indicator.
- (4) A flight monitor which presents a plot of vehicle acceleration versus velocity. Together with families of curves shown on the plotter face, the astronaut can determine whether uncontrollable skipout or excess acceleration is imminent.

2.4.2 System Operation

A typical supercircular entry for the Apollo vehicle can be divided into four areas as shown in figure 5. The guidance technique uses predicted capabilities during the initial phases and a nominal trajectory during the final phase.

A flow chart for entry steering is shown in figure 6. Reference 19 contains a detailed explanation of the Apollo entry guidance logic for the various phases of flight.

At atmospheric entry near an altitude of 400 000 feet, the vehicle velocity is about 36 000 ft/sec. The safe corridor which Apollo must enter (fig. 5) on a lunar return is approximately 26 nautical miles wide. If the spacecraft enters near the top or bottom of this corridor, the lift vector will be directed by banking the vehicle (0° or 180°), so as to drive the spacecraft toward the center of the corridor. Phase III is a ballistic lob outside of the atmosphere which may be bypassed if the range to the target is short. During phase IV the spacecraft is steered to the target. This final phase usually includes the last 600 to 800 nautical miles of the entry and is similar to the entry from a near-Earth orbit. This phase terminates at about 25 000 feet when drogue parachutes are deployed.

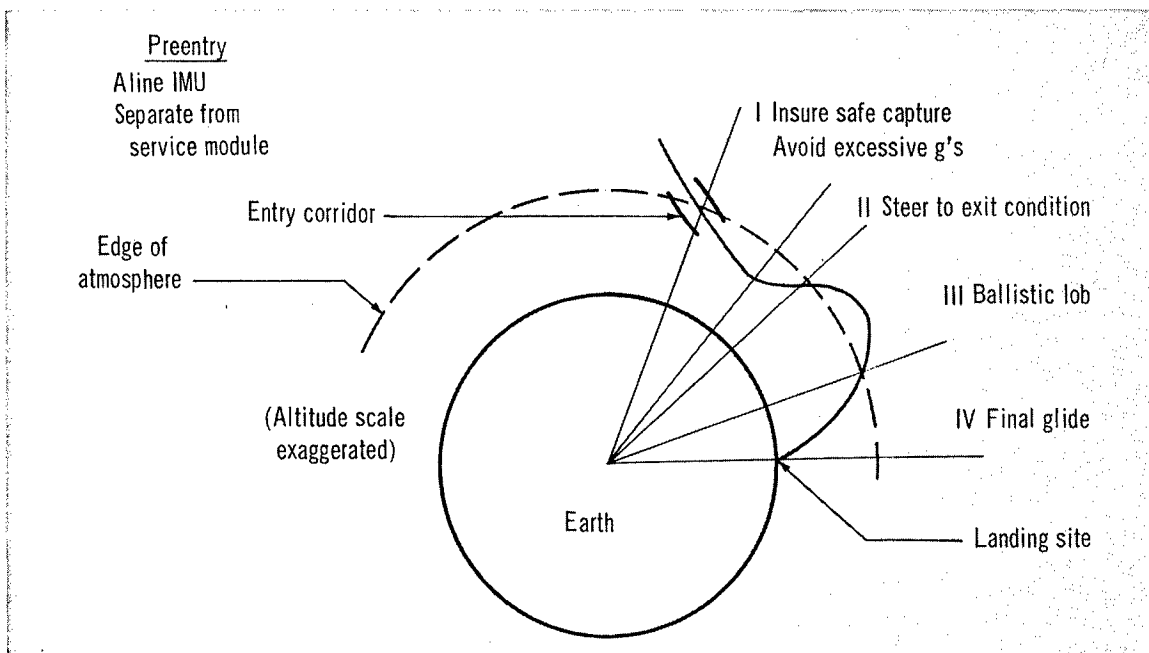


Figure 5.—Apollo entry guidance phases.

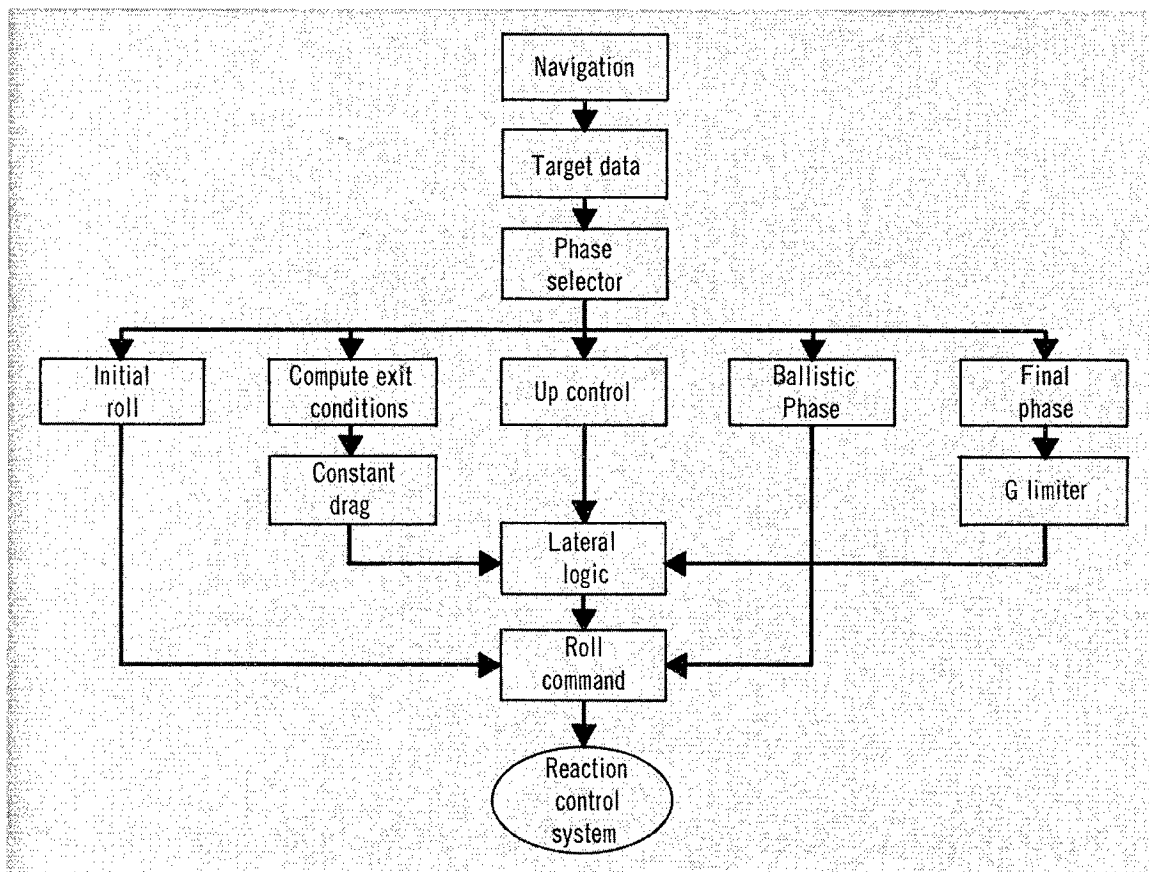


Figure 6.—Apollo entry steering flow chart.

References 24 and 25 present the results of an investigation of G&N system errors during entry on position at parachute deployment for an Apollo-type vehicle. These errors included initial condition errors in altitude, altitude rate, range angle and range-angle rate, and equipment errors such as accelerometer misalignment angle, gyro-drift rate, accelerometer biases, and accelerometer scale factor uncertainties.

Limited flight experience with the Apollo vehicle indicates that the large uncertainties in preflight prediction of L/D remain a problem area as with the Gemini vehicle.

2.5 ASSET Guidance

The unmanned ASSET (Aerothermodynamic/elastic Structural Systems Environmental Tests) entry vehicle configuration consisted of a flat-bottomed, 70° delta wing and a cone cylinder body on the upper surface. Maximum L/D was 1.2 and $W/C_D A$ was 250 lb/ft^2 . A liquid ballast system transferred liquid mercury between forward and aft tanks to change the vehicle center of mass and hence the trim angle of attack. Detailed data on the guidance aspects of the program may be found in references 26 and 27.

A functional diagram of the ASSET guidance and control (a modified Scout system) is shown in figure 7. The guidance and control system performed satisfactorily during five suborbital flights, maintaining trajectories down to recovery system deployment within 3σ design limits. The only flight malfunctions were intervalometer timing errors which occurred during the AEV-1 and AEV-2 flights. The problem was found to be caused by radio frequency interference on the input power leads.

A summary of the trajectory characteristics and the downrange landing errors for the five flights is presented in table V. Lateral dispersions were all less than 6 nautical miles right or

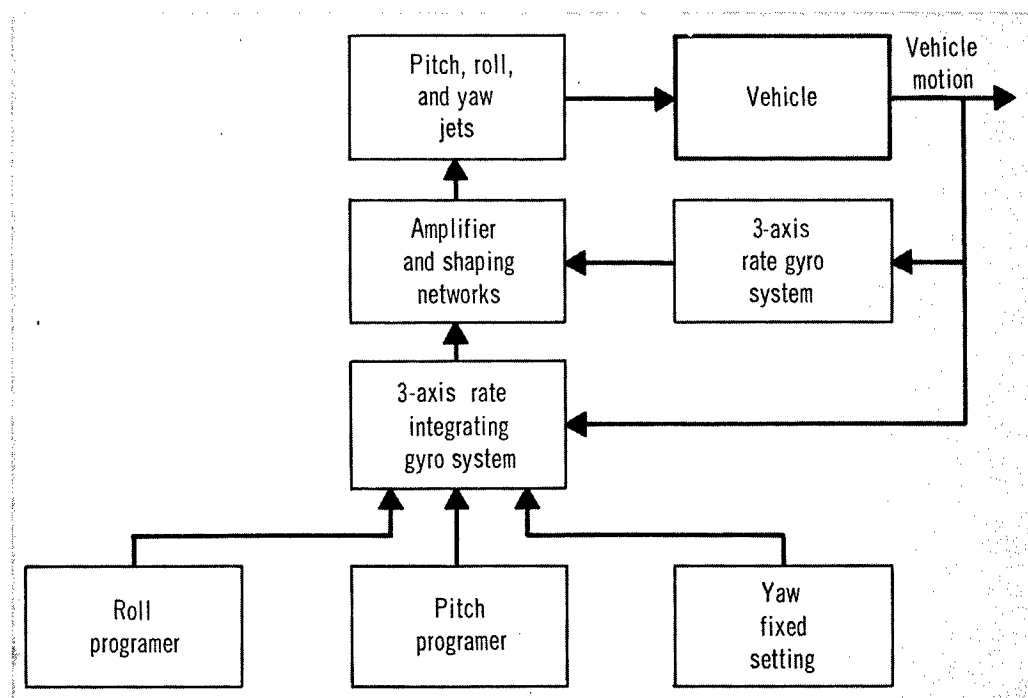


Figure 7.—ASSET guidance and control system.

TABLE V.—Summary of Asset Suborbital Flights

Flight	Initial altitude, ft	Initial velocity, ft/sec	Range, n. mi.	Landing error, n. mi.
ASV-1	200 000	16 000	942	-55
ASV-3	212 000	18 000	1390	-78
ASV-4	200 000	19 400	2300	-94
AEV-1	165 000	13 000	844	-8
AEV-2	174 000	13 000	742	-45

left. The primary factor in the landing-point dispersions was found to be in the differences between the predicted and actual trim characteristics. This caused the actual L/D to be about 10 percent less than the predicted value.

2.6 PRIME Guidance

The unmanned PRIME (Precision Recovery Including Maneuvering Entry) flight test program was conducted to demonstrate the feasibility of a maneuverable vehicle capable of recovering an 80-pound payload from low-Earth orbit with a 3σ accuracy of 10 nautical miles and with a cross-range maneuver capability of 700 nautical miles. Three flights which met this objective were made using an SV-5D entry vehicle with a maximum L/D of 1.4 and $W/C_D A$ of 175 lb/ft². Pitch control by means of reaction jets and pitch flap provided downrange control. In addition reaction jets provided control in roll and yaw. Detailed data on the entry guidance aspects of the program are included in reference 28.

A functional diagram of the PRIME guidance and control system is shown in figure 8. An "acceleration guidance" technique was used. A stored acceleration profile was compared with the measured acceleration to generate pitch commands to the autopilot that, in effect, changed the vehicle L/D. The modulation of L/D in the pitch plane controlled range of the vehicle. Banking the vehicle controlled cross-range maneuvering.

Advantages of the acceleration guidance technique are simplicity combined with low sensitivity of the desired range angle to entry angel and velocity errors, accelerometer misalignment, variation in L/D, accelerometer bias, and accelerometer scale factors. The disadvantage is that for high accuracy a terminal scheme is required. The technique is relatively inflexible. For example, it does not have the capability of commanding any required lift to correct for a gross error in retrofire time. Cross-range errors were strongly

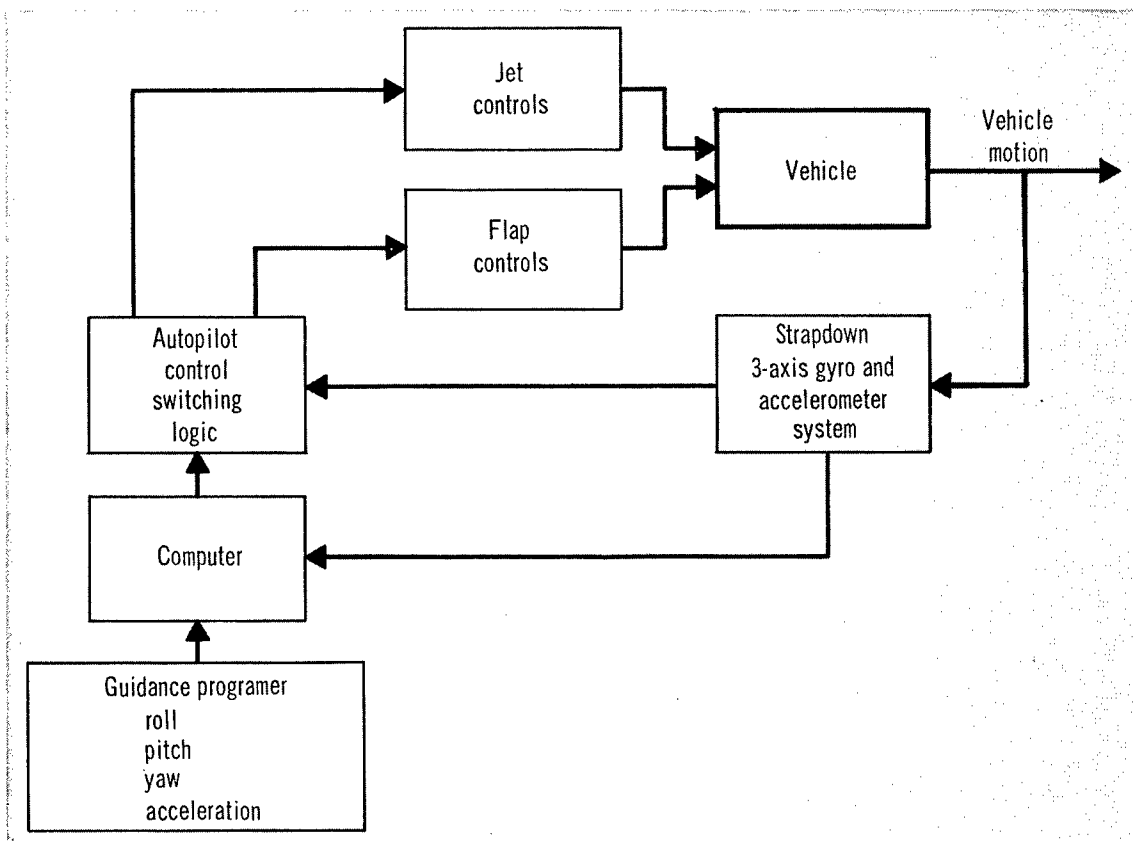


Figure 8.—PRIME entry guidance and control system.

dependent on attitude errors and errors in determination of vehicle L/D. As an alternative to guidance by the onboard computer/programmer, the vehicle could be controlled through a telemetry link.

2.7 Summary

For ballistic entry (zero lift), experience with Mercury indicates a state-of-the-art landing point accuracy of 20 to 40 nautical miles (1σ). The main sources of error are uncertainties in retrofire ΔV and retrofire attitude.

For entry using low L/D (less than 0.5), experience with Gemini indicates a state-of-the-art landing-point accuracy of approximately 4 nautical miles (1σ) where the navigation error is 3 nautical miles (1σ).

For unmanned entry using mid-L/D (around 1.0), experience with ASSET indicates a state-of-the-art landing-point accuracy of 50 nautical miles (1σ). Presumably a substantial part of this error could be eliminated by a terminal guidance system.

For controlled entry with low L/D, the entry G&N system can use the general purpose IMU and onboard computer. Only backup and/or monitoring equipment needs to be added.

Uncertainty in vehicle L/D is one of the biggest sources of landing-point error.

A scheme that nulls predicted landing point error as rapidly as possible is less sensitive to L/D uncertainties than a scheme that gradually corrects out landing-point error (Gemini).

Empirical equations for predicting range at zero lift or fractional lift (Gemini) provide a simple basis for steering commands.

3. CRITERIA

The design of the entry guidance and navigation (G&N) system shall achieve an acceptable compromise between errors in terminal conditions and complexity, power consumption, weight, volume, and reliability. The guidance scheme shall be insensitive, insofar as practicable, to atmospheric and vehicle parameters over which the designer has no control and shall accept as large a deviation from nominal conditions as practicable. Crew safety shall be accorded first priority in design decisions; however, appropriate emphasis shall be accorded to mission objectives.

3.1 Performance

The entry G&N system shall be capable of navigating and steering the vehicle, in the presence of anticipated perturbations, so that position and velocity errors at the completion of entry will not exceed specified values. It shall have a capability for handling anticipated off-nominal initial conditions, and for guiding the vehicle to all possible landing sites within the accessible region. Terminal accuracy shall be determined by an error analysis which includes uncertainties in (1) initial conditions, (2) atmospheric properties, (3) vehicle aerodynamic characteristics, (4) changes in aerodynamic characteristics during entry, (5) measurements during entry, and (6) the accuracy of implementing desired control.

The entry G&N system shall not cause the vehicle to maneuver outside of the allowable entry corridor or environment bounds established for the specific mission and spacecraft. Specified heat protection limitations such as maximum total heat load on the vehicle, maximum total lower or backface surface heating, and peak stagnation heating rates shall not be violated. Deceleration limitations that would overload the vehicle structure or cause a time-tolerance overload on the crew must not be exceeded. Flightpaths shall be maintained within allowable envelopes of maximum dynamic pressure versus load factor and total heating versus maximum heating rate. These envelopes shall be established as functions of entry flightpath angle, entry velocity, angle of attack, and bank angle.

A simple logic shall be selected for the entry phase. Verification shall be made that computation time for the navigation and steering equations is adequately fast to satisfy the operational objectives. Computing accuracies must be consistent with input accuracies and terminal accuracy specifications. The selected scheme shall not require excessive reaction control fuel and shall use the pilot's intelligence to maximum advantage. It should provide smooth control time histories which are suitable to manual, semiautomatic, or fully automatic operation. The control time histories and the trajectory shall be compatible with a simple crew monitor concept. The design shall incorporate a technique that allows the pilot to easily switch between manual and automatic modes without introducing undesirable transients.

The computer shall include provision for manual and/or automatic data insertion. Appropriate checks shall be incorporated in the design to minimize the possibility of inadvertent dumping or erasing of the stored program by the crew. Adequate input/output provisions shall be included to allow the crew to monitor and communicate with the computer. Computer software shall include diagnostic subroutines that facilitate malfunction detection. Suitable malfunction indication shall be provided for the crew. The reliability of any failure detection hardware or software shall be significantly greater than the reliability of the component or operation being monitored.

For lifting body vehicles descending to a horizontal landing the navigation error at the beginning of the terminal guidance phase (100 000 feet) shall be substantially less than the remaining maneuver capability. The entry G&N system shall be closely integrated with the terminal G&N system to assure a smooth transition to the terminal phase of flight.

3.2 Crew Safety

It shall be demonstrated that the G&N system meets crew safety requirements during ground and flight operations. This demonstration shall be validated by a combination of analytical and simulation studies, component tests, system tests, and flight tests. All anticipated flight configurations and modes of operation shall be considered. Both primary

and backup G&N modes shall be verified, with account taken of the effects of single failures on the operation of all components and subsystems.

No single component failure within the G&N system shall preclude accomplishment of the functions necessary to provide crew survival. The design shall be such that G&N system failures will not adversely affect the operation of the inner stabilization and control loop. Partial system failures shall have minimum effect on the total system performance. Specific mission and spacecraft reliability requirements such as crew safety probability, mission success probability, and mean time between failure during ground and flight operations shall be met by the entry G&N system. The reliability of any entry monitor system shall be significantly higher than the primary system being monitored.

3.3 Additional Considerations

The simplest design capable of performing the required functions shall be provided. The number of components shall be minimized along with the total entry G&N system weight, volume, and power consumption. Developed and flight-proven equipment, compatible with the specific mission and spacecraft objectives, shall be used insofar as practicable. The system design shall be versatile and readily adaptable to various entry missions without extensive hardware modifications.

The entry G&N system shall be self-contained and have a capability for performing its function without aid from the ground following a position update from the ground shortly before retrofire. However, the system should be designed to take advantage of information from the ground, where available. The designer shall consider interfaces with the existing ground electronics system. Early definition of interface characteristics shall be made and strict interface control shall be maintained throughout the design. This shall include spacecraft/ground interfaces as well as onboard equipment interfaces. Careful analysis and testing of each interface shall be made to insure adequate protection from electromagnetic interference (EMI). A comprehensive EMI control plan shall be established early in the design to insure that no EMI problems exist in the entry G&N system. A workable G&N system electrical grounding philosophy, cognizant of the equipment packaging and its distribution throughout the spacecraft, shall be developed early in the design.

The system design shall not be subject to corona electrical discharges. Immunity to corona discharge effects shall be demonstrated during laboratory tests.

The system shall be designed to be quickly and easily checked and maintained under prelaunch conditions. The equipment installation shall be readily accessible so that last minute adjustments or repairs can be made if necessary. Provision of sufficient test points shall be included to speed checkout and to eliminate the requirement to disconnect equipment in order to isolate malfunctions.

4. RECOMMENDED PRACTICES

Procedures and recommended practices for the design of entry G&N systems, and for the analysis, simulation, and test of such systems are presented.

4.1 Performance

It is imperative that the entry G&N system designer have a definitive statement of the problem at the outset. Accordingly, it is recommended that at the inception of a spacecraft development program the designer obtain a clear literal description of what the entry G&N system is to do. This description will be improved as the design process continues, and revised as mission plans change. The primary requirements that will influence the entry G&N system are: (1) terminal accuracy requirements, and (2) crew safety and mission success requirements.

4.1.1 Entry Flight Profile

It is recommended that some typical entry flight profiles be established to serve as design baselines for subsequent analysis and synthesis of the entry guidance logic. These profiles will depend on the entry vehicle aerodynamic and mass characteristics; vehicle heating and loading limitations; crew and/or payload deceleration limits; the Earth and atmospheric models used; and the location of the landing site(s) relative to the orbits from which Earth return will be made. The entry profiles will also be influenced by the entry velocity and flightpath angle, which in turn depend upon the deorbit or midcourse maneuver preceding entry, and upon the orbit parameters from which entry will be initiated.

Entry flight profiles should be established for shallow, steep, and nominal (or middle-of-the-corridor) values of entry flightpath angle. The values to use will depend upon the particular mission and vehicle characteristics. Methods similar to those presented in reference 29 are recommended for establishing entry velocity and flightpath angle limits such as those shown in figure 9 (from ref. 30) which illustrates the acceptable values of entry flightpath angle and velocity for the Mercury, Gemini, and Apollo vehicles.

The entry profiles should start from an altitude of 400 000 feet (alternatively, the 0.05-g drag deceleration point may be used). The termination of entry will depend on the entry vehicle configuration and the type of terminal descent system being used. For low-L/D vehicles, the termination of entry is the point where terminal landing devices are deployed. For vehicles that can make a conventional airplanelike final descent and landing, it is defined as an altitude of 100 000 feet.

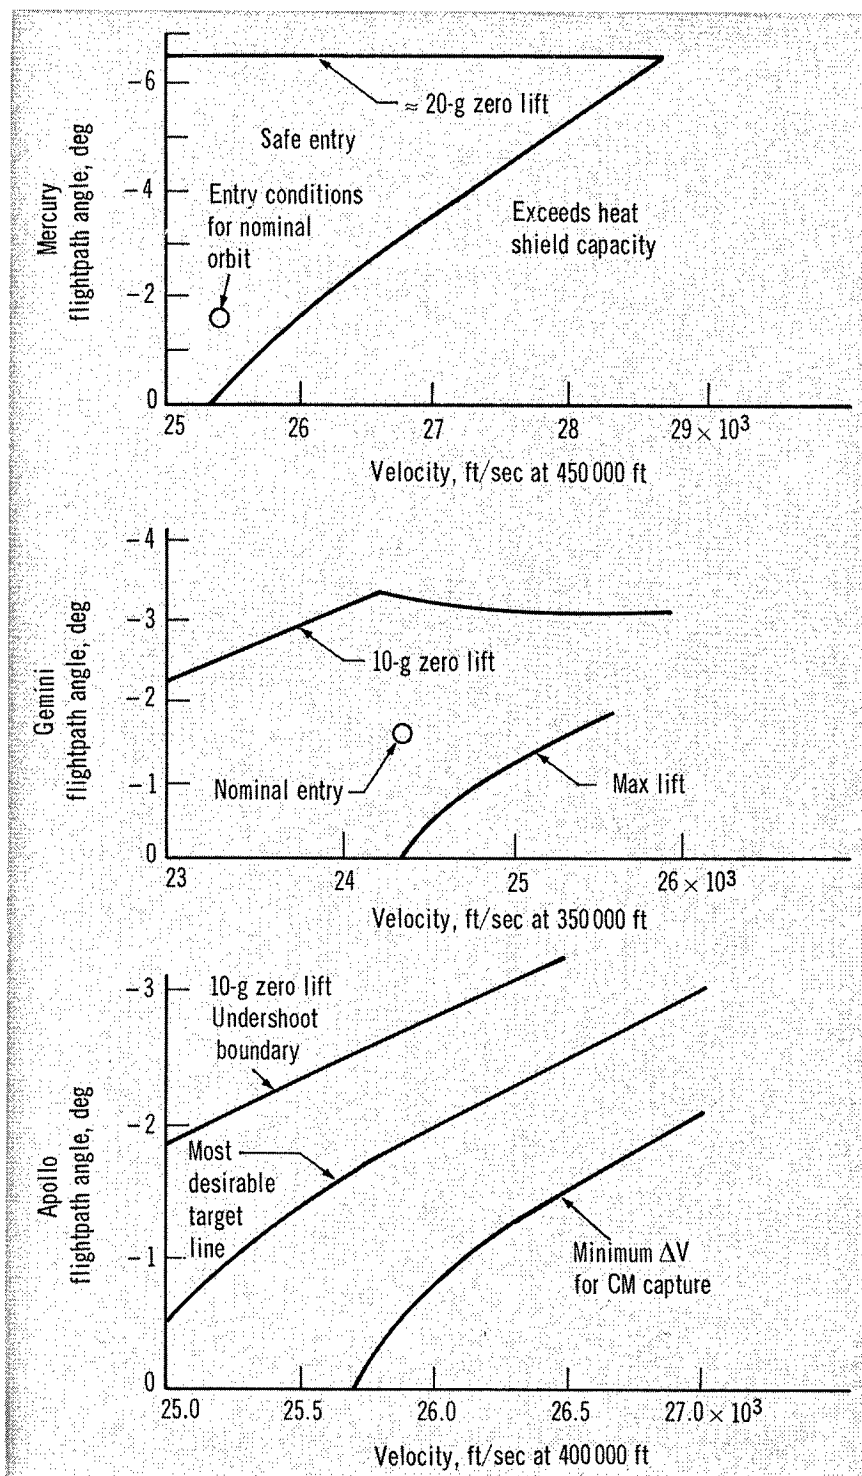


Figure 9.—Entry velocity and flightpath angle limits.

A point-mass model of the vehicle and a homogeneous spherical Earth are adequate for generating the initial entry profiles (ref. 29). Standard atmosphere information such as that described in reference 31 may be used. The profiles can be determined by successively improving a trial flight profile. These improvements can be made by cut-and-try or by systematic procedures such as those discussed in reference 32. The resulting profiles should be well within the limits established by the structure and the crew.

4.1.2 Operational Boundaries

It is recommended that operational boundaries within which the entry G&N system must perform be defined early in the design. Initially these boundaries will be very approximate, but as the program progresses and the vehicle configuration becomes more clearly defined, they should be updated. Analyses and simulation studies should be carried out during the design to confirm that the entry G&N system does not cause the vehicle to violate any of these boundaries.

The methods described in reference 33 are recommended for determining entry vehicle operating boundaries in the altitude-velocity plane. An illustration of such a boundary for a lifting entry vehicle is shown in figure 10. If the recovery ceiling shown in the figure is exceeded, the vehicle will be flying too slowly to sustain altitude and will be unable to check its descent before passing through the lower heating boundary. The area above the α_{\max} 0° bank curve (established by trim limitations) is characterized by insufficient lift. The vehicle can safely pass through this region but it cannot maintain sufficient lift to stay there. Flight in the region beneath the heating boundary will lead to excessive heating loads or heating rates, depending upon how the boundary is penetrated and the time involved. To stay within the operating boundaries it is usually inadvisable for a mid-L/D vehicle to fly at an angle of attack below its maximum L/D.

Simulator and physical tests should be conducted to insure that aerodynamic heating constraints will not be exceeded over a reasonable range of off-nominal conditions. The techniques of reference 33 may be used for computing ablation rates and heating envelopes such as those illustrated in figure 11. Such envelopes should be generated for nominal, shallow, and steep entry as functions of maximum L/D, maximum angle of attack and bank angle. The data in figure 11 from reference 34 indicate that shallow entry causes the largest integrated heating load and the steep entry results in the maximum stagnation point heating rate.

Simulator tests should demonstrate that structural limits will not be exceeded over a reasonable range of off-nominal operational conditions. The allowable structural loads must be determined in cooperation with the structural designers. Dynamic pressure limits may occur because of panel flutter, buffeting, or control surface buzz phenomena. Criteria for

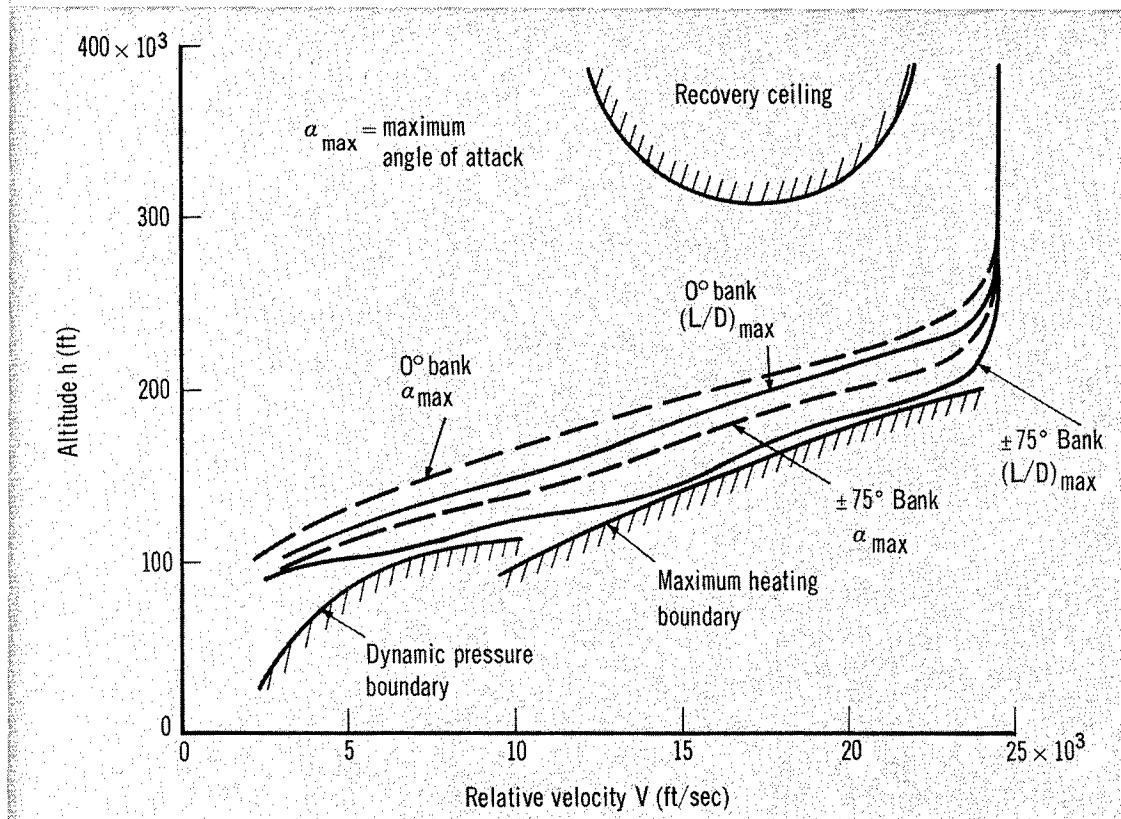


Figure 10.—Typical entry operating boundaries for lifting entry vehicle.

panel flutter and buzz are covered in NASA SP-8004 and SP-8003, respectively. If aerodynamic control surfaces are used, the angle of attack is limited to the range where trim is possible.

Simulator and physical tests should be conducted to insure that the crew is not subjected to excessive acceleration/time conditions during entry. During the initial design phases it is recommended that a peak 10-g acceleration limit be used. A more realistic boundary for later design phases is presented in figure 12 from reference 35. Because of biological and diurnal variability it is difficult to establish rigid limits under all circumstances. Accordingly, the boundary shown in figure 12 must be interpreted as approximate (ref. 35).

Another significant boundary which influences the G&N system is the footprint, which is the area on the Earth's surface that can be reached by the vehicle from specified entry conditions. The G&N system design must be such that all landing sites within the footprint may be reached. This capability must be demonstrated by simulation studies during the

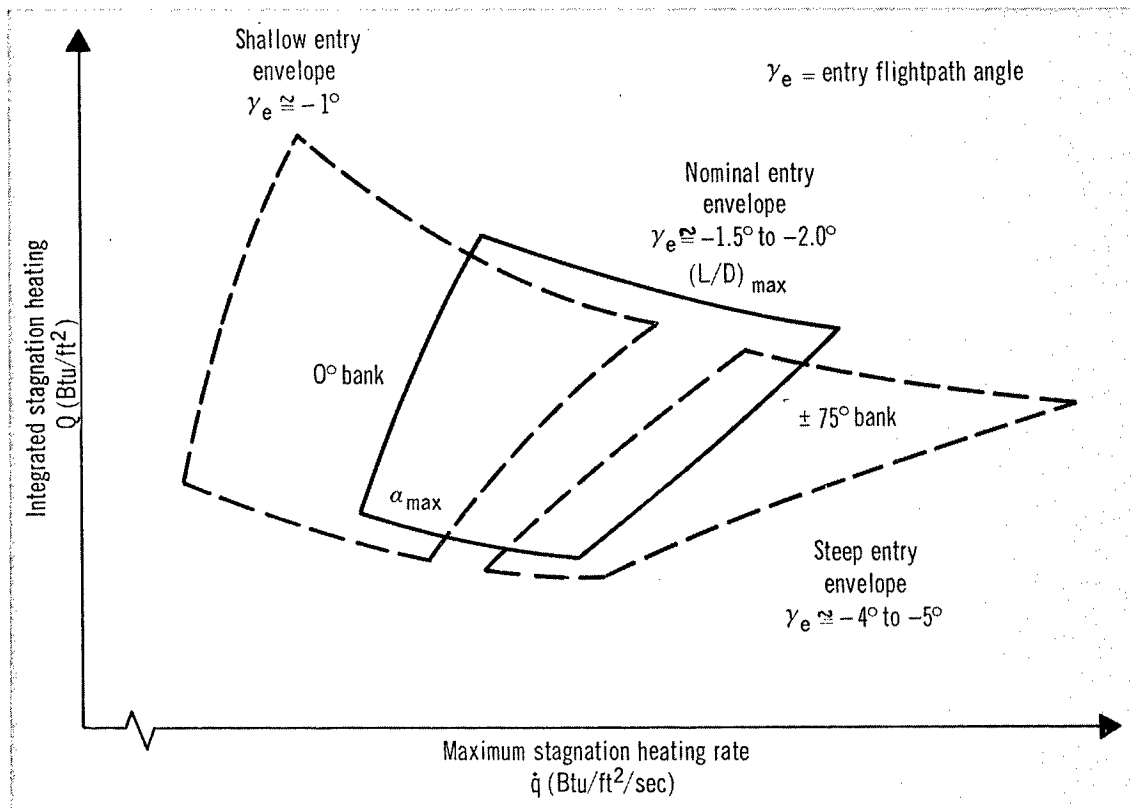


Figure 11.—Typical lifting body entry heating envelopes.

design. It is recommended that footprints such as those illustrated in figure 13 be established by cut-and-try methods (ref. 36) or by systematic procedures (ref. 32). The typical footprints in figure 13 from reference 34 illustrate the large effect of small changes in entry flightpath angle. Entry from different orbital altitudes changes the entry velocity, which also influences the footprint size. The shaded area between the 45° bank and the 75° bank angles is considered marginal from an operational standpoint. It is recommended that the G&N system steering commands be limited to bank angles less than 45° for mid-L/D vehicles.

Analysis and simulation studies must be carried out continuously throughout the evolution of the G&N system design to insure that none of the operational boundaries described above are exceeded for any anticipated flight conditions.

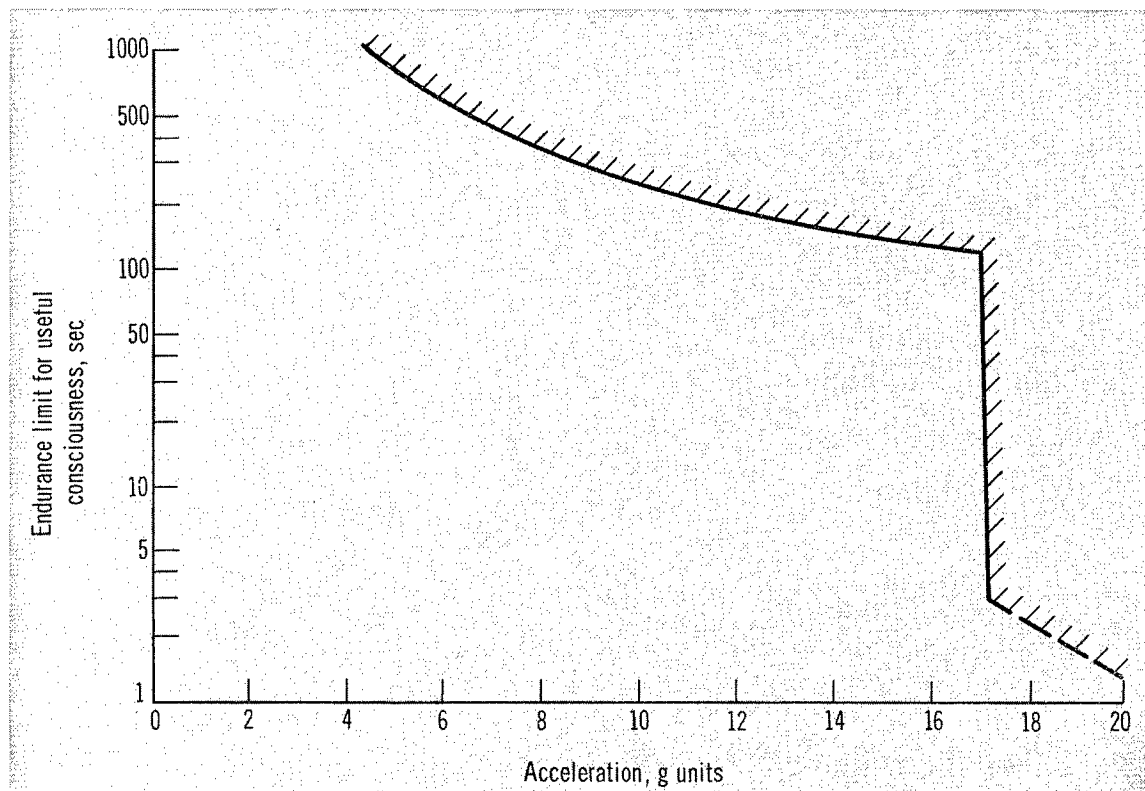


Figure 12.—Pilot endurance limit for eyeballs in acceleration.

4.1.3 Error Analysis

A feedback guidance law should be formulated that will steer the vehicle along, or close to, the desired flightpath(s) with acceptable terminal accuracy. Consideration of the type of control available during entry should be included in the formulation. Terminal accuracy requirements will be verified by conducting error analyses. The recommended procedures for doing this include: computer simulation using random inputs (the Monte Carlo method); root-sum-square procedures combined with linear analysis of errors caused by individual sources (ref. 25); and an extension of the latter procedure called Markov process analysis (ref. 32).

The terminal error is composed of a steering error and a random error. The steering error is the terminal miss distance assuming known initial conditions and vehicle parameters, perfect navigation and no disturbances. It results from imperfections in the guidance equations and

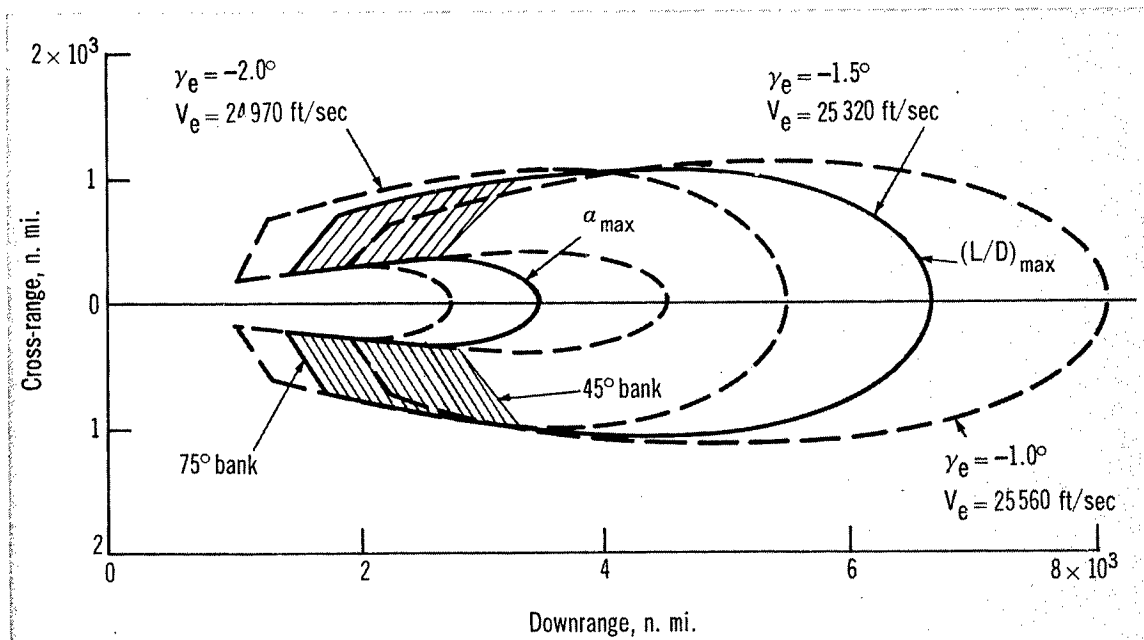


Figure 13.—Typical footprints for lifting body entry vehicle.

in general is different at every point on the footprint. The steering error at the termination of entry should be less than 2 nautical miles.

The random error is the terminal miss distance over and above the steering error, caused by random initial condition errors, in-flight disturbances, instrument measurement errors, and uncertainties in vehicle parameters. It is recommended that the following random error sources be included in the error analysis:

1. Initial conditions:

- a. Orbital elements—perigee altitude (± 0.5 n. mi.) eccentricity (± 0.0001), and inclination ($\pm 0.1^\circ$)
- b. Deorbit position—latitude and longitude ($\pm 0.01^\circ$)
- c. Attitude during retrofire—pitch and yaw angles ($\pm 5^\circ$ to 10°)
- d. Retrorocket impulse (± 2 to 3 percent)

2. Measurement errors:

- a. Platform alinement—pitch, yaw, and roll
- b. Gyro errors—random drift, mass unbalance, and anisoelasticity
- c. Accelerometer errors—scale factor and null readings
- d. Altimeter errors
- e. Radar position and/or velocity errors

3. In-flight disturbances:

- a. Aerodynamic characteristics—L/D (up to ± 25 percent)
- b. Vehicle weight (± 1 percent)
- c. Center of mass location (± 0.2 in.)
- d. Atmospheric density (exponential variation about standard from ± 10 percent at sea level to ± 60 percent at 300 000 feet) [ref. 37]
- e. High altitude winds—such as in reference 30
- f. Spacecraft attitude—roll ($\pm 5^\circ$) and pitch ($\pm 2^\circ$)
- g. Steering command implementation—time delay for manual control (up to 4 seconds) [ref. 39]
- h. Roll rate implementation (up to $\pm 2^\circ$ per second) [ref. 9]

It is recommended that error analyses be performed for landings at 8 to 10 different locations on the footprint. The error analyses should include the effects of the oblate Earth, actual orbit inclination, and variations in L/D with Mach number and the viscous parameter, V^* . In combining the errors, the steering error should be added to the root sum square random errors.

A tradeoff investigation should be made between increased reaction control fuel and decreased random terminal error. This can be done by Markov process analysis if linearization and additive errors are adequate or by Monte Carlo techniques.

4.1.4 Mathematical Models for Performance Analysis and Simulation

The complexity of the mathematical model used for analysis and simulation depends on the design phase and on the desired accuracy. Simple models which neglect gravity, atmospheric motion, and variable vehicle characteristics are useful in preliminary design and in gaining understanding of the effects of the main parameters. The most accurate models should be used in final phases of the design including the complete gravitational potential, a rotating atmospheric model, wind tunnel derived aerodynamic data, and elastic body effects.

4.2 Crew Safety and Mission Success

Early in the design of manned entry vehicles, overall crew safety and mission success goals are established. Crew safety goals expressed in probability terms are typically on the order of 0.995 to 0.999. Mission success goals may fall in the range 0.90 to 0.95. The entry G&N system contribution to the crew safety and mission success probabilities must be determined.

4.2.1 Probability of Successful Operation

The techniques of references 40 and 41 are recommended for determining the entry G&N contribution to crew safety and mission success. The probability of successful operation of the entry G&N system should be assessed by using reliability logic diagrams. Component reliability test data should be used wherever possible. The level of detail depends upon the design phase. Figure 14 is a simple first-level diagram showing a section of a possible entry G&N system. P is the probability of successful operation of the overall system; P_S , P_{PG} , and P_{BG} are probabilities of successful operation of the components. Further information on the steps in the analysis may be found in reference 40.

4.2.2 Single-Point Failure Analysis

Single-point failure analysis is a useful tool for determining where redundant elements should be used. It consists of examining the effects of a leak, a broken wire, a switch stuck between two positions, failure of one transistor, or a broken pin in a connector plug, etc., at all points in the system under design.

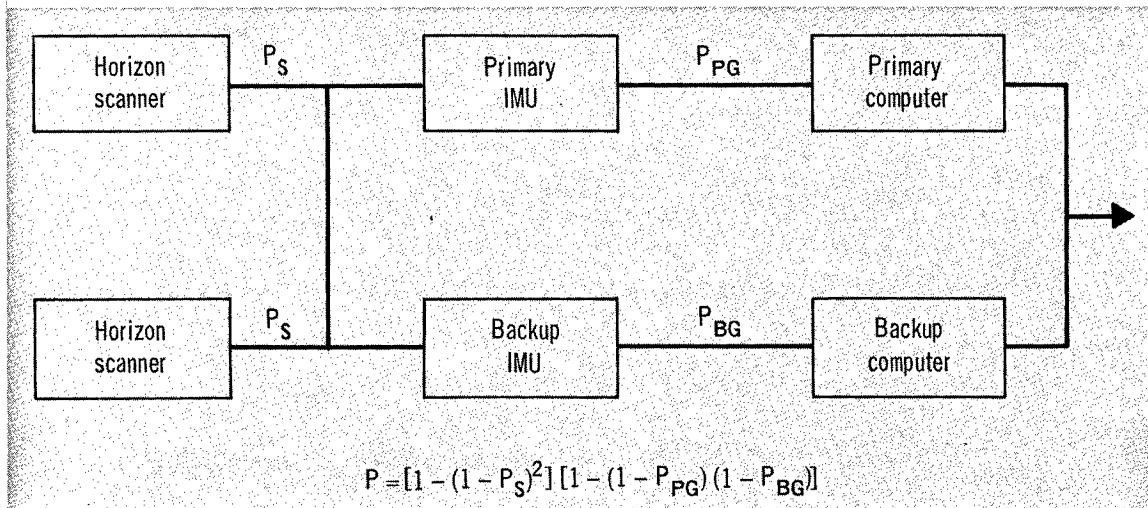


Figure 14.—Example of a first-level entry G&N system reliability logic diagram.

Identification of all the elements in the G&N system that could fail, the ways in which they could fail, and estimation of the probability of such failure are important first steps in designing for reliability. The level of detail in this task depends upon the design phase. A consistent failure affects analysis, and design policy should be applied to all system elements.

4.2.3 Redundancy

The high reliability goals and the multiplicity of components and interconnections in the entry G&N system usually require some degree of redundancy in the design. Since redundancy is always costly in terms of weight, volume, power consumption, money, and/or complexity, the number of redundant elements should be minimized subject to the desired reliability goals. Some of the redundancy techniques which may be used in the entry G&N system are listed below. The best technique to use for any design will depend on the specific mission and spacecraft requirements.

Triple redundancy.—The outputs of three identical elements are compared or “voted” upon. The output will be proper even in the event that one element fails. However it requires extra equipment and loses reliability if all three systems must operate for a substantial fraction of the time.

Dual redundancy.—The outputs of two identical elements are compared. Disagreement greater than some threshold value causes both elements to shut down.

Single element with monitor.—Same as dual redundancy except one of the elements is a simulation of the functional element.

Dual with spare.—Same as dual redundancy except that, upon disagreement, a third (spare) element is used.

Dual with dummy.—A simulation element is compared with two functional elements. Failure of one functional element causes output to be taken from the other functional element. (Failure of the simulation element is troublesome.)

Dual with spare dual.—Disagreement in one dual pair causes output to be taken from the other dual pair.

4.2.4 Malfunction Detection Systems

A malfunction detection system should be considered for catastrophic failure modes. The reliability of the monitor should be greater than the reliability of the element being monitored. Careful consideration should be given to time lags in detection and to reaction times in selecting and implementing alternate modes of operation. The entry monitor system (EMS) on the Apollo (ref. 23) not only monitors but also gives enough display information to allow a crude, but safe, manual entry.

4.3 Additional Recommendations

It is recommended that current estimates of terminal downrange and cross-range error, based on present position and velocity, be continuously displayed to the crew. In general, all information relating to safety and mission performance available to the computer should also be accessible to the crew via displays.

A configuration control board should be organized early in the design phase to rule on whether proposed changes should be allowed and to maintain official records of the current configuration design.

Wherever possible, system elements should be designed for checkout without the necessity for direct access. However, access to one system component (that may be malfunctioning) should be possible without the necessity of disturbing another component (that may be working well). Insofar as practicable, system elements should be designed for blackbox interchangeability so that detailed repair or adjustment can be performed in a shop, not on the launch pad.

The designer should attempt to use power in the form in which it is available. Power converters should be avoided since they add weight and complexity while they reduce efficiency and reliability.

4.4 System Design

The G&N system design will follow a progressive evolution, beginning with the preliminary mission and vehicle system planning and ultimately resulting in the operational G&N system. The process begins with the conceptual design phase. It progresses through the preliminary design, detail design and development, and integration and test phases. Other elements such as training, mission planning, and flight tests also come into play.

4.4.1 Conceptual Design

In the conceptual design phase various guidance and navigation concepts are investigated in a preliminary manner by means of simplified tradeoff analyses to determine which concept would best serve the mission and spacecraft requirements. Relatively simple models for the important elements of the design analysis are recommended in this phase. Adequate results will be obtained by assuming constant gravity, which is effectively a parabolic-Earth approximation. This assumption is realistic for the conceptual phase since the radius of the Earth compared to the relatively low altitude of the atmospheric entry phase introduces only small errors when compared to the inverse square gravity or spherical-Earth approximation.

An exponential density variation and a nonrotating Earth are recommended for the initial analysis. Depending on the latitude and heading at entry, the nonrotating Earth assumption will cause a slight difference between the inertial velocity and the relative velocity. This difference would be about 3 percent for a vehicle at a latitude of 30° N. For later phases of the design, the rotation of the Earth should be taken into account.

Since the vehicle aerodynamic characteristics will not be well defined in the conceptual design phase, it is reasonable to assume that the lift and drag are dependent on the dynamic pressure and the angle of attack. No sideslip effects need be included. The vehicle may be represented by a point mass with two degrees of freedom for planar analyses and three degrees of freedom for analyses including lateral maneuvers. Point-mass equations such as those presented in reference 42 or 43 may be used. Either a digital or analog simulation is acceptable for solving the equations of motion.

Using the model recommended previously, guidance analyses may be carried out assuming a perfect navigation system. This will provide a gross determination of the relative performance of different guidance concepts. These comparisons can be made using the design flight profiles and the various operational boundaries discussed in section 4.1. In section 2 it was pointed out that various concepts for entry guidance have been proposed. These concepts involve the sensing and/or application of such parameters as angle of attack, roll angle, altitude, altitude rate, temperature, temperature rate, dynamic pressure, etc. The designer

must select among these and other possible schemes that concept which will best serve the requirements of his specific mission and spacecraft. In analyzing the different concepts, a designer must keep in mind the desire for a simple logic which is amenable to either manual or automatic operation.

Different navigation concepts should also be investigated during this phase. The functional requirement for the navigation portion of the G&N system is to continuously determine three-axis position, velocity, and attitude of the vehicle in a suitable reference frame. Since communication blackout limits contact with the ground during critical phases of entry the navigation concept must be based on an onboard system such as an inertial platform or strapdown system. The conceptual design phase analyses should provide adequate information on the different guidance concepts and the different navigation concepts investigated to allow the selection of one or two concepts for more detailed study in the preliminary design phase.

4.4.2 Preliminary Design

In the preliminary design phase more accurate models will be used to conduct analyses of the one or two guidance and navigation concepts which resulted from the conceptual studies. The inverse-square gravity (spherical-Earth) assumption should be used in this phase. Later this may be improved by using a two-term gravitational potential (oblate-Earth) assumption. A standard atmosphere such as described in reference 31 should also be used. The lift and drag of the vehicle can be represented by more accurate expressions. A point-mass three-degree-of-freedom model may be continued in the preliminary design phase for trajectory analysis. However, it is recommended that an analysis using a rigid body representation of the vehicle be initiated for the attitude motion analysis. The attitude motion analysis should utilize decoupled longitudinal and lateral dynamics to provide preliminary results. The development of a more accurate simulation should begin, if possible utilizing a hybrid analog/digital computer and a fixed-base cockpit simulator. Initially, the simulation should be kept as simple as possible to allow preliminary determination of the effectiveness of pilot participation in the guidance loop while avoiding excessive costs. Mathematical models of the system concepts may be used during the first stages of the simulation, but later as hardware components are developed, they should be incorporated into the simulation.

With the more accurate model described above, the ideal behavior of the combined G&N concepts resulting from the conceptual design phase may be analyzed in some detail. Error analyses should be carried out as discussed in section 4.1.3. G&N system information flow and subsystem interfaces should be defined. Consideration should be given to software methods and compatibility with the onboard computer mechanization as defined by total mission requirements. Preliminary definition of the mechanization and major components of the system should be made.

During this phase it is appropriate to initiate reliability analyses as described in section 4.2. Identification should be made of any untried features or unique requirements associated with the system in order that tests may be planned and carried out to prove the proposed mechanization. Preliminary budgets should be established for weight, power, volume, reliability, etc. An error budget should be prepared to allocate the total system error among the various system error mechanisms. Such a budget will allow a quantitative preliminary performance analysis for comparison with mission requirements.

Initial man-in-the-loop fixed-cockpit simulation studies should be carried out to provide preliminary evaluation of different proposed display concepts and to obtain information on how the pilot might best be used in the selected guidance and navigation concept. Investigations of system operation near the various operational boundaries should be conducted to determine how well the selected system concept functions near the allowable limits.

Coordination with the preliminary design of the other vehicle systems should be carried out to insure satisfaction of interface requirements. At the end of this phase a formal review of the system design should be held. Approval of the preliminary design and all of its supporting analyses will allow initiation of the detail design and development phase.

4.4.3 Detail Design and Development

This phase should utilize the most accurate models. The complete gravity potential describing the actual Earth should be used in the analyses and simulations. Altitude dependence of the atmosphere above an oblate Earth and effects of inclined orbits should be included. The best available aerodynamic characteristics either from wind-tunnel tests or flight data should be incorporated in the model, including all Mach number variations for the lift, drag, and side force coefficients and the roll, pitch, and yaw moment coefficients. The analyses and simulations should concentrate on the rigid body, coupled six-degree-of-freedom model. For some vehicle configurations, elastic degrees of freedom should also be included. As various system components are developed and become available, the actual hardware elements should be tied into the man-in-the-loop six-degree-of-freedom simulation.

The subsystem budgets regarding accuracy, reliability, weight, volume, power, etc. should be updated by further simulation studies. These should include extensive investigations of the sensitivity of terminal accuracy to uncertainties in initial conditions, the atmosphere, vehicle aerodynamic characteristics, measurements, and implementation of control. The capability of the system to guide the vehicle to landing sites anywhere in the footprint should be verified by man-in-the-loop simulations. Interface specifications between the G&N system and other vehicle systems should be formalized so that detail design of all these systems can proceed with confidence in their later compatibility.

Detailed crew safety and mission success analyses should be carried out in order to determine any additional redundancy or backup requirements. The simulation should be updated to incorporate as many of the displays as are available. Simulation studies should be carried out to verify the adequacy of the displays and the ability of the pilot to participate in the guidance to the required extent. Any monitor system to be included should be simulated to determine how well the pilot can use it. Procedures for switching over from manual to automatic modes should be evaluated. The adequacy of the computer input/output unit should be assessed.

At this point the detail design of the software should start in order to develop a coded guidance computer program which should include a program listing of the fixed and erasable memory part of the program. Relatively firm mission plans and vehicle system characteristics will be required for an effective software design. A definition of the flight program, including equations in codable form and computer requirements, such as range of variables and compute-cycle constraints, must be prepared. Special engineering simulations should be used to investigate and optimize individual areas of the total program such as integration routines and filtering methods.

A final computer compatibility study should be carried out to insure that the software requirements are compatible with the selected computer characteristics. The flight equations should be tested in a closed-loop flight simulation with the equations programed in a convenient computer language. The next step involves the coding of the program in the flight computer language and the checkout of the coded program. Tests should be carried out to demonstrate that the software, when included as part of the G&N system, is capable of guiding the vehicle in all of the anticipated operating modes.

4.4.4 Integration and Tests

During this phase the components of the G&N system are mated together to form a complete system. Any interface problems must be worked out at this time to insure that the integrated system operates as planned in all modes. Tests for electromagnetic interference effects should be carried out to verify that no such problems exist. Closed-loop operation of the system should be checked for all anticipated mission conditions. Final software tests should be conducted to verify the compatibility of the generated commands with the flight programs and mission requirements. Complete man-in-the-loop simulations energizing all the actual hardware components of the G&N system should be carried out as a final check of the system design.

REFERENCES

1. Wingrove, R. C.: Survey of Atmospheric Reentry Guidance and Control Methods. AIAA J., vol. 1, no. 9, Sept. 1963.
2. Austin, R. W.; and Ryden, J. M.: Trajectory Control and Energy Management of Lifting Reentry Vehicles. AAS Advances in the Astronautical Sciences, vol. 16, part 1, Sept. 1963, pp. 829-866.
3. Perlmutter, L. D.; and Carter, J. P.: Reference Trajectory Reentry Guidance Without Pre-launch Data Storage. J. Spacecraft Rockets, vol. 2, no. 6, Nov. 1965.
4. Stalony-Dobrzanski, J.: Reentry Guidance and Control Using Temperature Rate Flight Control System. AIAA Paper No. 65-47, Jan. 1965.
5. Schultz, R. L.; and Anderson, P.: A Simple Guidance Scheme for Lifting Body Reentry Vehicles. AIAA Paper 67-136, Jan. 1967.
6. Speyer, J. L.; and Bryson, A. E.: A Neighboring Optimum Feedback Guidance Scheme Based on Estimated Time-To-Go With Application to Reentry Flight Paths. AIAA J., vol. 6, no. 5, May 1968, pp. 769-776.
7. Tannas, L. E.; and Perkins, T. R.: Simulation Evaluation of Closed Form Reentry Guidance. AIAA Paper No. 67-597, Aug. 1967.
8. Faget, M. A.; and Pilland, R. O.: Mercury Capsule and Its Flight Systems. IAS Paper No. 60-34, Jan. 1960.
9. Anon. Project Mercury Familiarization Manual. McDonnell Rept. SEDR-104, Dec. 1962.
10. Anon. Mercury Project Summary. NASA SP-45, 1963.
11. Carley, R. C.; and Cheatham, D. C.: Gemini Guidance and Control. Paper presented at 16th Int. Astronaut. Cong. (Athens, Greece), Sept. 1965.
12. Paddock, S. G., Jr.: The Gemini Reentry Guidance and Control System. Proc. 1966 Joint Automatic Control Conference (Seattle, Wash.), Aug. 1965, pp. 205-210.
13. Carley, R. C.; Schulze, N.; Drone, B. R.; Camp, D. W.; and Hanaway, J. F.: Gemini Guidance, Control, and Propulsion Systems. Gemini Midprogram Conference NASA SP-121, 1966.

14. Malik, P. W.; and Souris, C. A.: Project Gemini, A Technical Summary. NASA CR-1106, 1968.
15. Harpold, J.: Results of the Reentry Guidance System Used During Project Gemini. Paper presented at the Reentry Guidance and Control Meeting, Ames Research Center (Moffett Field, Calif.), Oct. 6, 1966.
16. Box, D. M.; Harpold, J. C.; Paddock, S. G.; Armstrong, N. A.; and Hamby, W. H.: Controlled Reentry. Gemini Summary Conference Proceedings. NASA SP-138, 1967.
17. Wolfers, C. V.; and Motchan, H. L.: Mercury/Gemini Program Design Survey. McDonnell Rept. F917, 1968.
18. Lickly, D. J.; Morth, H. R.; and Crawford, B. S.: Apollo Reentry Guidance. MIT Instrumentation Laboratory Rept. R-415, 1963.
19. Morth, H. R.: Reentry Guidance for Apollo. MIT Instrumentation Laboratory Rept. R-532. Vol. I, Jan. 1966.
20. Anon.: Apollo Guidance and Navigation Equipment Familiarization Manual, ch. 5, Computer Subsystem. Raytheon Rept. ND-1021037, Feb. 1964.
21. Duncan, R. C.: Apollo Navigation, Guidance and Control. Apollo Lunar Landing Mission Symposium. NASA TM X-58006, 1966.
22. Anon.: Critique of the Apollo Guidance System Design. MIT Instrumentation Laboratory Rept. E-2119, May 1967.
23. Frank, A. J.; Knotts, E. F.; and Johnson, B. C.: An Entry Monitor System For Maneuverable Vehicles. Spacecraft Rockets, vol. 3, no. 8, Aug. 1966.
24. White, J. S.: Investigation of the Errors of an Inertial Guidance System During Satellite Reentry. NASA TN D-322, 1960.
25. Hansen, Q. M.; White, J. S.; and Pang, A. Y. K.: Study of Inertial Navigation Errors During Reentry to the Earth's Atmosphere. NASA TN D-1772, 1963.
26. Bartlett, H. E.; Dean, J. W.; Owen, A. H.: ASSET-Systems Description and Evaluation. AFFDL-TR-65-31, Vol. II, April 1966.
27. Anon.: Proceedings of ASSET/Advanced Lifting Reentry Technology Symposium. AFFDL-TR-66-22, Dec. 1965.

28. Minor, J. W.: Prime Strapdown Guidance System, Transactions of the 11th Symposium on Space and Ballistic Missile Technology. Vol. II, July 1966, pp. 202-242.
29. Duncan, R. C.: Dynamics of Atmospheric Entry. McGraw-Hill Book Co., Inc., New York, 1962.
30. Huss, C. R.; Hicks, C. R.; and Allen, C. C.: Space-Flight Mission Design for Flight and Crew Safety. J. Spacecraft Rockets, vol. 5, no. 6, June 1968.
31. Anon.: U.S. Standard Atmosphere, 1962. Joint NASA, USAF and U.S. Weather Bureau Publication. Washington, D.C., Dec. 1962; and Supplement, 1966.
32. Bryson, A. E.; and Ho, Y. C.: Applied Optimal Control. Blaisdell Publishing Co., Waltham, Mass., 1968.
33. Wing, L. D.; and Eilertson, W. H.: Research Studies and Analysis to Define Manned Lifting Entry Flight Environment. NASA CR-639, 1966.
34. McGowan, J. W.; and Davis, R. M.: Comparison of Radiative vs Ablative Heat Shield Concepts for Manned Lifting Entry Vehicles With L/D's of 1.4 and 2.7. AIAA Paper No. 66-990. Dec. 1966.
35. Fraser, T. M.: Human Response to Sustained Acceleration. NASA SP-103, 1966.
36. Bryson, A. E.; Mikami, K.; and Battle, T.: Optimum Lateral Turns for a Reentry Glider. Aerospace Eng., vol. 21, no. 3, March 1962.
37. Smith, A. E.; and Chenoweth, H. B.: Range of Density Variability from Earth Surface to 120 km. NASA TN D-612, 1961.
38. Smith J. W.; and Vaughan, W. W.: Monthly and Annual Wind Distribution as a Function of Altitude for Patrick Air Force Base. NASA TN D-610, 1961.
39. Alles, J. A.: Reentry Hybrid Simulation Results. Gemini Design Note No. 249, 1965.
40. Tinkelenberg, A. D.; and Ryland, H. R.: Crew Safety—A Combination of Many Disciplines. AIAA Paper No. 67-934, Oct. 1967.
41. Bland, W. C.; and Fisher, L. R.: Reliability Through Attention to Detail. Manned Spacecraft Engineering Design and Operation. Fairchild Publications, Inc. 1964, pp. 409-419.

42. Volgenau, E.: Boost Glide and Reentry Guidance and Control. Guidance and Control of Aerospace Vehicles, McGraw-Hill Book Co., Inc., 1963.
43. Loh, W. H. T.: Dynamics and Thermodynamics of Planetary Entry. Prentice-Hall, 1963.

NASA SPACE VEHICLE DESIGN CRITERIA DOCUMENTS ISSUED TO DATE

SP-8001 (Structures)	Buffeting During Launch and Exit, May 1964
SP-8002 (Structures)	Flight-Loads Measurements During Launch and Exit, December 1964
SP-8003 (Structures)	Flutter, Buzz, and Divergence, July 1964
SP-8004 (Structures)	Panel Flutter, May 1965
SP-8005 (Environment)	Solar Electromagnetic Radiation, June 1965
SP-8006 (Structures)	Local Steady Aerodynamic Loads During Launch and Exit, May 1965
SP-8007 (Structures)	Buckling of Thin-Walled Circular Cylinders, September 1965
SP-8008 (Structures)	Prelaunch Ground Wind Loads, November 1965
SP-8009 (Structures)	Propellant Slosh Loads, August 1968
SP-8010 (Environment)	Models of Mars Atmosphere, May 1968
SP-8014 (Structures)	Entry Thermal Protection, August 1968