


NOTES: When Government drawings, specifications, or other documents are used in connection with this contract, the contractor shall observe the following: (1) All drawings, specifications, or other documents shall be the property of the Government and shall be returned to the Government when requested. (2) The contractor shall not make any reproduction or disclosure of the drawings, specifications, or other documents without the express written permission of the Government. (3) The contractor shall not use any drawings, specifications, or other documents for any purpose other than that for which they were prepared. (4) The contractor shall not use any drawings, specifications, or other documents for any purpose other than that for which they were prepared. (5) The contractor shall not use any drawings, specifications, or other documents for any purpose other than that for which they were prepared.

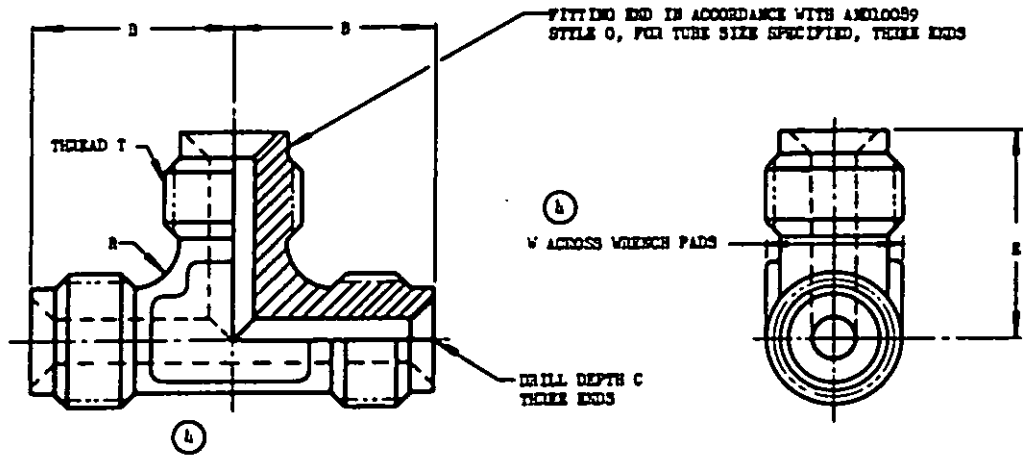

DASH NO.	ERASS	CORROSION-RESISTANT STEEL	TUBE DIA	THREAD T	B +.007 -.000	C +.007 -.000	E +.007 -.000	R ±.015 RAD	W ±.015	WEIGHT MAX	
										ERASS	CORROSION-RESISTANT STEEL
(b)	2	C2	.125	5/16-12 UNF-3A	.625	.625	.625	.062	.312		
	3	C3	.188	3/8-24 UNF-3A	.625	.688	.688		.375		
	4	C4	.250	7/16-20 UNF-3A	.750	.750	.750		.438		
(c)	5	C5	.312	1/2-20 UNF-3A	.875	.875	.875	.094			
	6	C6	.375	5/8-18 UNF-3A	1.000	1.000	1.000		.625		
	8	C8	.500	3/4-16 UNF-3A	1.188	1.188	1.188		.750		
(a)	10	C10	.625	15/16-14 RS-1	1.250	1.250	1.250	.125	.938		
	12		.750	1-12 UNF-3A	1.375	1.375	1.375				
	14		1.000	1-1/2-12 UNF-3A	1.625	1.625	1.625		1.125		

- (a) INACTIVE FOR DESIGN AFTER 23 NOV 62.
- (b) INACTIVE FOR DESIGN AFTER 9 MAY 67, EXCEPT FOR OXYGEN SYSTEMS AND ENGINE PRIMER LINES.
- (c) DASH NUMBERS 5, 6, 8, AND 10, ARE NOT TO BE USED ON ENGINE PRIMER LINES.

FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ARA BULLETIN NO. 337.

MATERIAL: ERASS; BARS, SHAPES OR FORGINGS.
CORROSION-RESISTANT STEEL; BARS, SHAPES OR FORGINGS.
SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

ADD P BEFORE DASH NUMBER FOR CADMIUM-PLATED ERASS TEE.

EXAMPLES OF PART NUMBERS: AN795-b - TEE - UNION, ERASS FOR .250 TUBING OD.
AN795Pb - TEE - UNION, ERASS, CADMIUM PLATED FOR .250 TUBING OD.
AN795C2 - TEE - UNION, CORROSION-RESISTANT STEEL FOR .250 TUBING OD.

REMOVE ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DYSLOTTED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1/2°.

PROCUREMENT SPECIFICATION
MIL-7-6001

AIR FORCE-NAVY AERONAUTICAL STANDARD
TEE, UNION

AN795

APPROVED 23 Nov 62 REVISED 1 9 May 67 2 28 Feb 69 3 1 Jun 64 b 20 Aug 56