

MILITARY STANDARD

MIL-STD-1323-360A

(NAVY)

UNIT LOAD
FOR UNDERWAY REPLENISHMENT

26 OCT 1993

AMRAAM, AIM-120A IN S/S/C, CNU-415A/E
ORSUPERSEDING
MIL-STD-1323-360
8 MAY 1991AMRAAM JAIM-120A CAPTIVE
AIR TRAINING MISSILE (CATM)
IN S/S/C CNU-555/EUNIT LOAD DATA

NUMBER OF MISSILES/CONTAINER _ _ _ _ _ 4

CNU-415A/E CONTAINER DWG # 30003-3145AS100

NUMBER OF CONTAINERS/UNIT LOAD _ _ _ _ _ 2

CNU-555/E CONTAINER DWG # 30003-3390AS100

GROSS WEIGHT OF ONE CONTAINER _ _ _ _ _ 2,075 LBS.

WEIGHT OF STEEL STRAPPING _ _ _ _ _ 6 LBS.


GROSS WEIGHT OF UNIT LOAD _ _ _ _ _ 4,156 LBS. Δ

CUBE _ _ _ _ _ 126.8 CU. FT.

Δ DO NOT USE FOR SHIPPING WEIGHT

FOR HAZARD CLASSIFICATION SEE SW020-AS-SAF-010/020/030

DATA SHOWN IS FOR BOTH CONTAINERS.

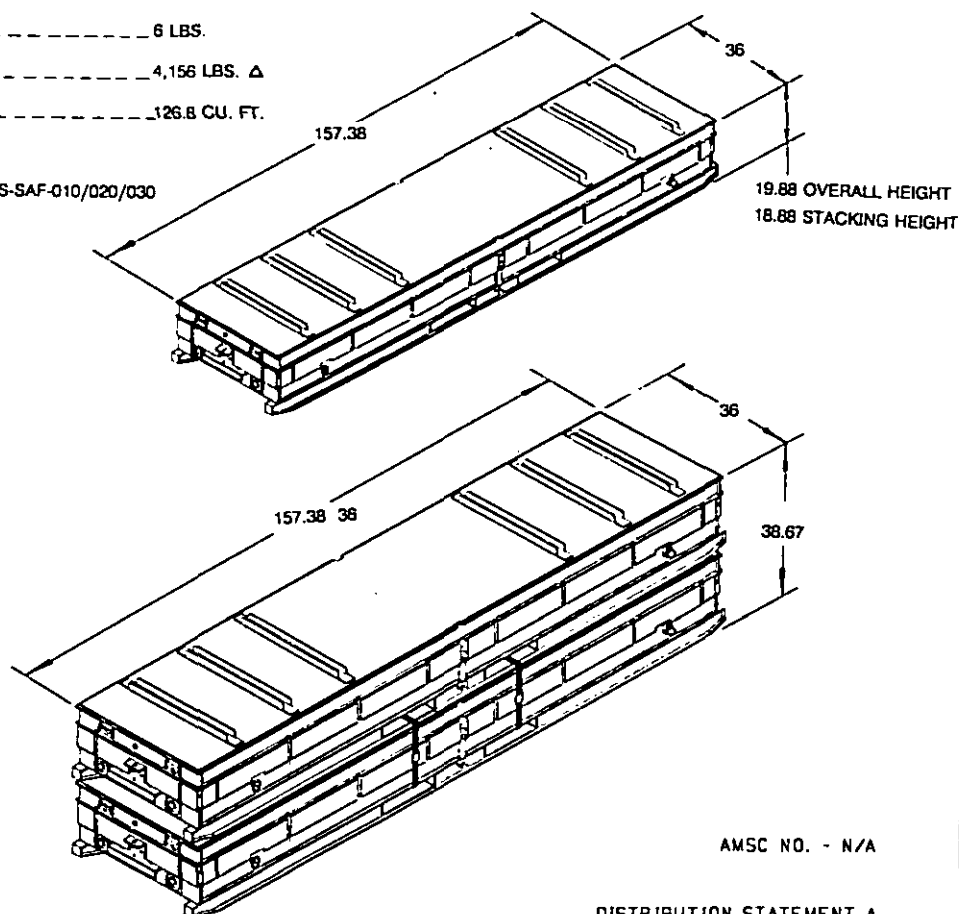

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

A	ADDED CNU-555/E S/S/C AND UP DATED DOCUMENT	5/8/91	CP	de
REV	REVISION DESCRIPTION	DATE	TDA	SYSCOM
LTR			APPROVAL	

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

C. L. Rinaldi 5/8/91
SIGNATURE TDA, WPNSTA EARLE DATE
William A. Schaefer 5/9/91
SIGNATURE AIRSYS COM BY DIRECTION DATE

ORIGINATOR *WPNSTA EARLE* 5/8/91
DATE


WPNSTA EARLE, NEW JERSEY

PAGE 1 OF 2

MIL-STD-1323-360A (NAVY)

UNITIZING PROCEDURE

1. PLACE ONE CONTAINER ON TOP OF ANOTHER. MAKE SURE TO ENGAGE THE STACKING FEATURES.
2. THREAD STRAPPING, ITEM 1, THROUGH THE FORK POCKETS OF LOWER CONTAINER AND UP THROUGH THE FORK POCKETS OF THE UPPER CONTAINER. TENSION STRAPPING, ITEM 1, AND DOUBLE NOTCH SEAL, ITEM 2.

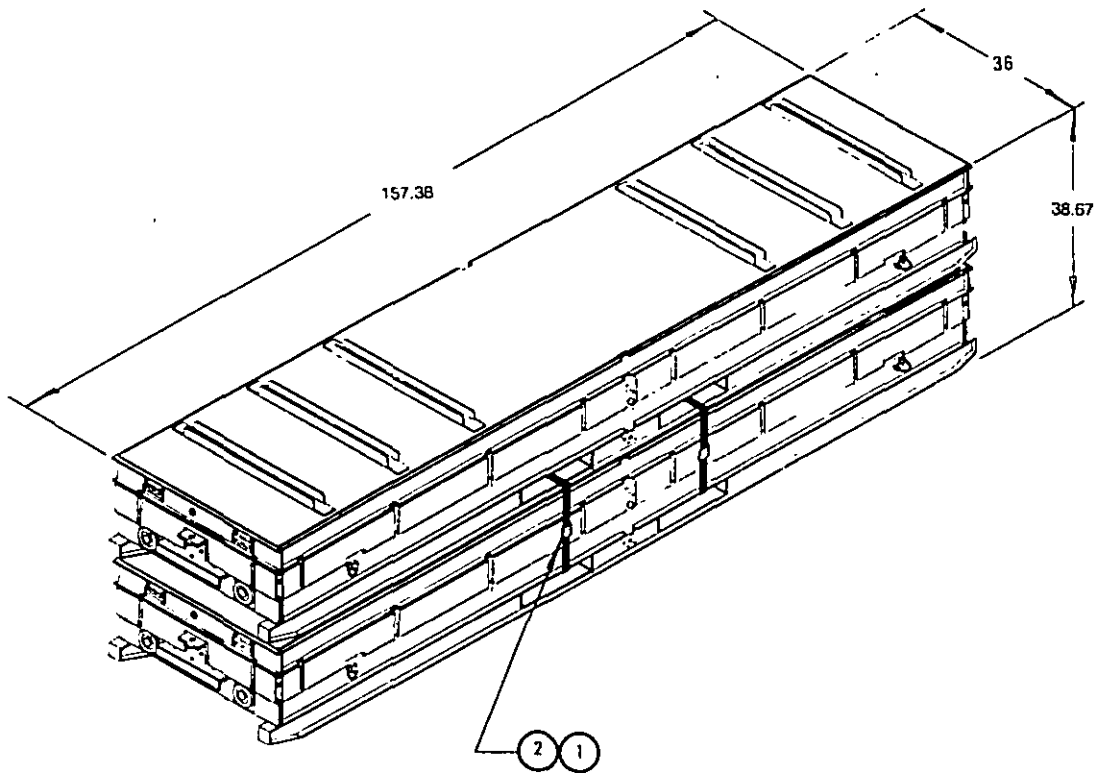

NOTE: UNLESS OTHERWISE SPECIFIED ALL MATERIALS SHALL BE IAW MIL-STD 1323 (NAVY).

DEUNITIZING PROCEDURE

1. CUT AND REMOVE STRAPPING.
2. REMOVE TOP CONTAINER.

2	2	SEAL	STEEL	FOR 1 1/4 STRAPPING
2	1	STRAPPING	STEEL	1 1/4 X .035 X 10 FT 6
REQ	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
LIST OF MATERIALS				

PREPARING ACTIVITY:
NAVY-OS
(PROJECT NO. 8140-0058)