

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODDS SPECIFIED IN THE SOLICITATION WWP-460

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

FORM APPROVED  
OMB NO. 0704-0188

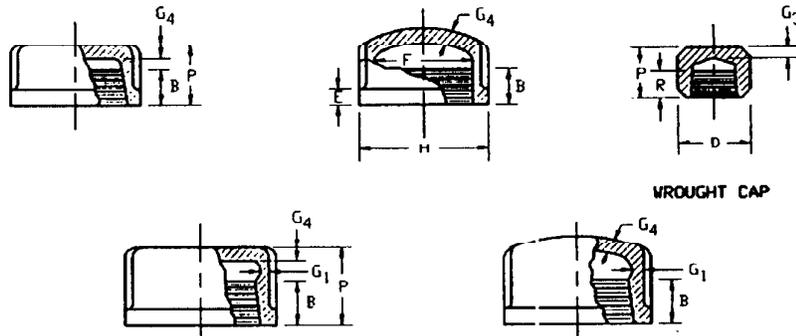


TABLE I. Fitting type and size applicability.

Dash Number	Nominal Pipe Size	Cast	Wrought
- 1	1/8	X	X
- 2	1/4	X	X
- 3	3/8	X	X
- 4	1/2	X	X
- 5	3/4	X	X
- 6	1	X	....
- 7	1 1/4	X	....
- 8	1 1/2	X	....
- 9	2	X	....
- 10	2 1/2	X	....
- 11	3	X	....
- 12	4	X	....

NOTES:

- MATERIAL:** Brass or bronze in accordance with ASME B16.15.
- PROTECTIVE COATING:** None.
- DIMENSIONS:** In accordance with ASME B16.15, Table 8 (Table AB).
- THREADING:** As specified in ASME B16.15.
- MARKING:** In accordance with ASME B16.15.
- PART NUMBER:** The MS part number consists of the MS number and the dash number. When left-hand threads are required, add the letter "L" to the part number.  
Examples:  
MS14310 - 9 represents a 2 NPS cast cap.  
MS14310 - 5L represents a 3/4 NPS wrought or cast cap, left-hand threads.
- For design feature purposes, this standard takes precedence over procurement documents referenced herein.
- Referenced documents shall be of the issue in effect on the date of the invitation for bid.

Revision letters are not used to denote changes due to the extensiveness of the changes.

PREPARING AGENCY: NAVY - YDI CUSTODIANS: ARMY - ME NAVY - YDI AIR FORCE - 99 DLA -	<b>MILITARY SPECIFICATION SHEET</b> TITLE CAPS, PIPE, BRASS OR BRONZE, THREADED, CLASS 125	SPECIFICATION SHEET NUMBER <b>INCH-POUND</b> MS14310B 28 FEBRUARY 1994 SUPERSEDING MS14310A 31 JANUARY 1983 AMSC - N/A FSC - 4730
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE. DISTRIBUTION IS UNLIMITED.		Page 1 of 1