


P.R. SUP CLASS

1480

THREAD NO. 10-32 NF-38
 SPECIFICATION MIL-S-7742
 MINOR DIA .1562 \pm .0062, -.0000
 PITCH DIA .1697 \pm .0019, -.0000

SECTION A-A
 .125 \pm .005
 .062 MINOR DIA
 .385 DIA
 .375
 100°
 .905 SLOT
 .500

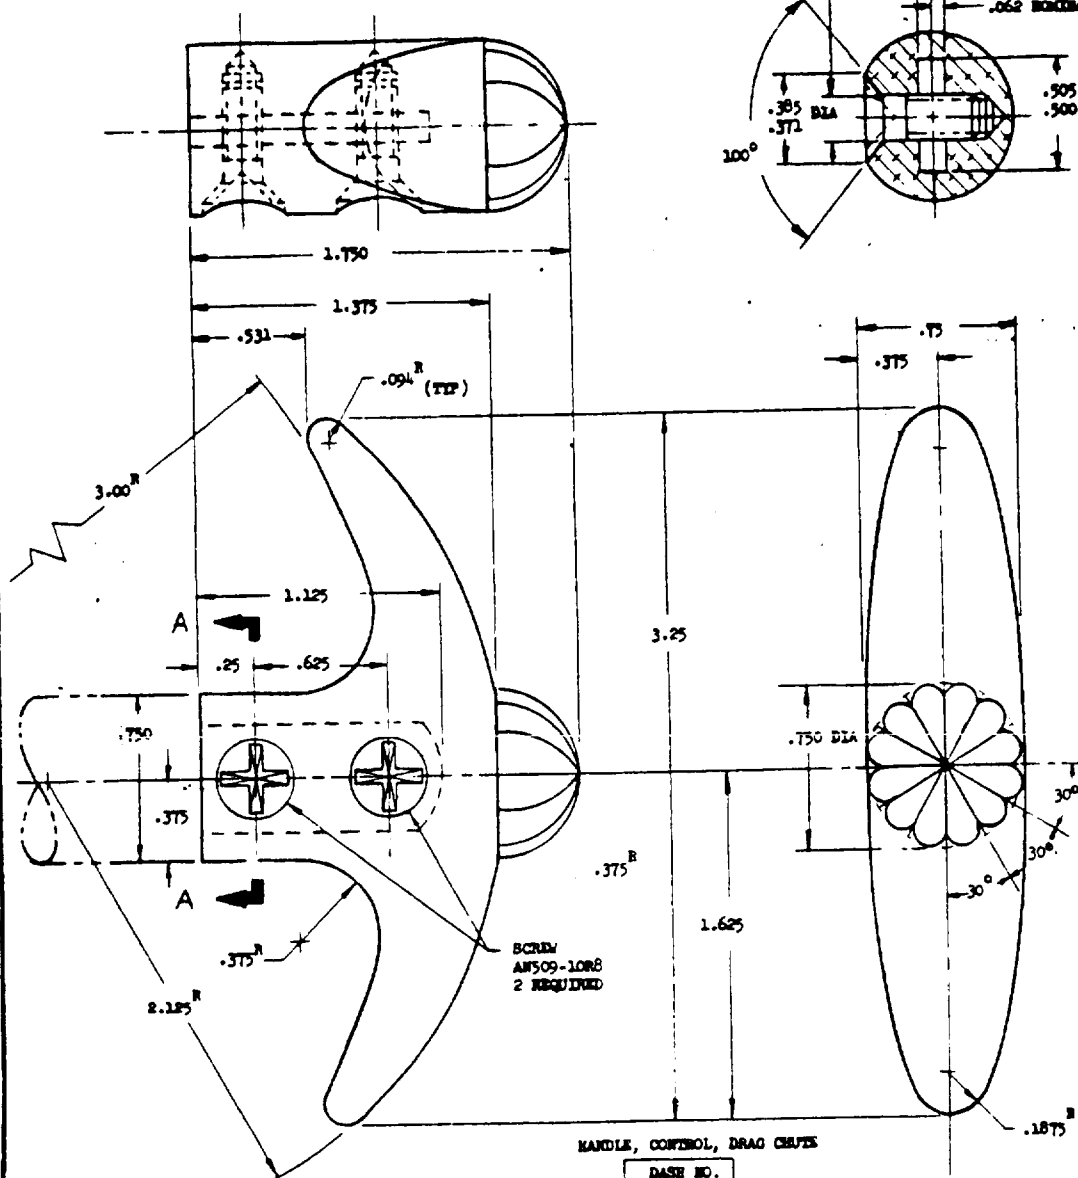

SCREW
 AN509-1088
 2 REQUIRED

HANDLE, CONTROL, DRAG CHUTE

DASH NO.

-1

Ⓐ CANCELLED 7 Sep 87 No Superseding Standard

MATERIAL: SEE PROCUREMENT SPECIFICATION.

FINISH: SEE PROCUREMENT SPECIFICATION.

BREAK ALL CORNERS AND SHARP EDGES EXCEPT SLOT.

THIS HANDLE IS FOR USE WITH ROPE HAVING END DIMENSIONS CONFORMING TO NAS129. FOR TUBE MOUNTING, SUBMIT DESIGN TO PROC. AGENCY.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS \pm .03, THREE-PLACE DECIMALS \pm .010, ANGLES \pm 1°.

FOR DESIGN FEATURE PURPOSE, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF - 11 Other Com Army - MC Navy - WP	TITLE HANDLES, CONTROL, AIRCRAFT DRAG CHUTE	MILITARY STANDARD MS21249
PROCUREMENT SPECIFICATION MIL-H-8810	SUPERSEDES	SHEET 1 OF 1

New activities:

Review activities:
Air Force - (11), (79)

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 5 May 1966
 REVISED Ⓐ 7 Sep 87