


FED. SUP CLASS
5935

User activities:

Review activities:

This military standard is approved for use by 2750 Air Base Wing, Electronic Support Div, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

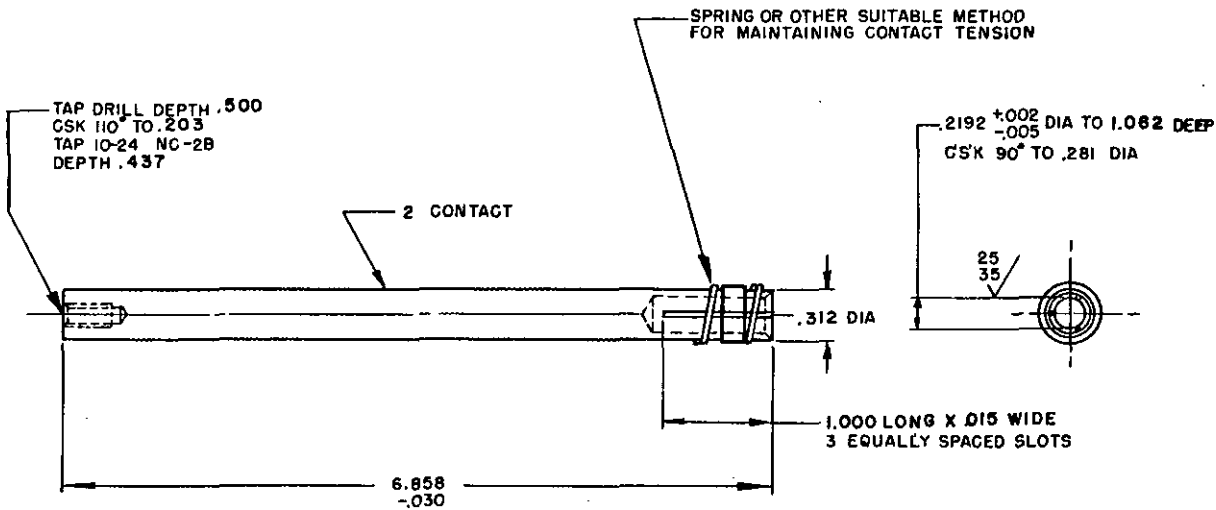

Inches	mm
.002	0.05
.005	0.13
.015	0.38
.030	0.76
.203	5.16
.2192	5.570
.281	7.14
.312	7.92
.437	11.10
1.000	25.40
1.062	26.97
6.858	174.19

PART NO
MS27284-1

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± 0.005 (0.13 mm).
4. Material: 2-brass, free turning QQ-B-626, Comp 22 - see procurement specification.
5. Finish: see procurement specification.
6. Unless otherwise specified, machined surfaces 125 or better per ANSI B46.1 1962.
7. Remove all burrs and break sharp edges.
8. All diameters must be concentric to each other within 0.004 TIR.
9. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
10. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

© CANCELED-NO SUPERSEDING STANDARD

© Denotes changes

REVISED (A) 17 JUL 67 (B) 8 MAR 74 (C) 24 JUN 87
APPROVED 7 OCT 63

P.A. AIR FORCE -85 Other Cust	International Interest	TITLE CONTACT, ELECTRICAL-PLUG CONNECTOR, RAMP POWER, 416/240 VOLTS SMALL, FEMALE	MILITARY STANDARD MS27284(USAF)
Procurement Specification MIL-C-38159		SUPERSEDES:	PAGE 1 OF 1

DD FORM 672
1 MAY 73
AMSC N/A

(Limited coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3577-3

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.