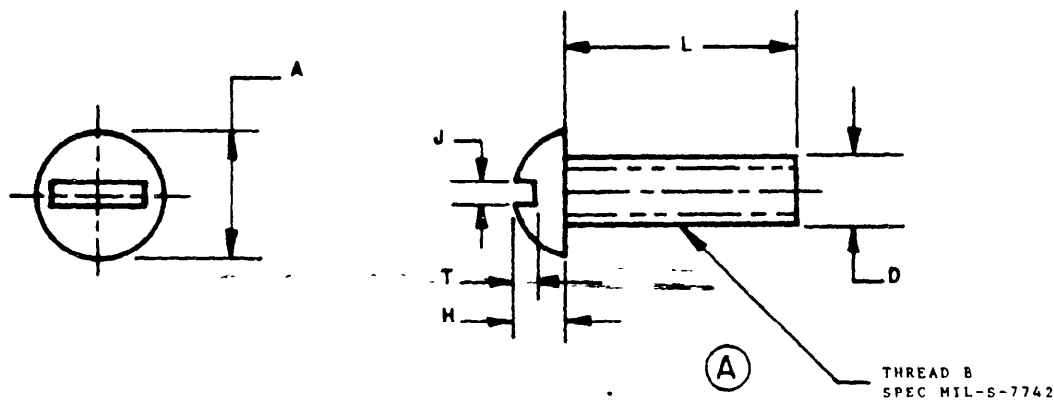


USER ACTIVITIES

S. ARMY-MI
DLA-15

REVIEWER

This military specification is approved for use by all Departments and Agencies of the Department of Defense
Selection for new engineering and design applications and for repetitive use shall be made from this documentFED SUP CLASS
5305

(A)

SIZE	THREAD P	P DIA MAX	A DIA	J ± .006	L	T
4	4-40 UNC-2B	112	202 \pm .009	.081	.034 \pm .006	.051 \pm .007 -.008
6	6-32 UNC-2B	138	250 \pm .010	.097	.039 \pm .006	.059 \pm .008 -.009
8	8-32 UNC-2B	164	298 \pm .011	.113	.044 \pm .006 -.007	.067 \pm .009 -.010
10	10-32 UNF-2B	190	347 \pm .012 -.013	.130	.048 \pm .007	.075 \pm .011

FUNCTION 1	DASH NUMBERS			
	4	6	8	10
1/8	4-2			
3/16	4-3	6-3	8-3	10-3
1/4	4-4	6-4	8-4	10-4
5/16	4-5	6-5	8-5	10-5
3/8	4-6	6-6	8-6	10-6

- (A) MATERIAL BRASS, SPEC QQ-B-626
- (A) FINISH SILVER PLATE QQ-S-365 OR TIN, MIL-T 10722
- (A) EXAMPLE OF PART NO AN508-6-3- #6 SCREW, 3/16 LONG
REMOVE ALL BURRS
DIMENSIONS IN INCHES
- (A) PACKAGE OR CONTAINER TO BE IDENTIFIED PER MIL STD-130

P A AF 82 Other Cust ARMY-AV AF-99	INTERNATIONAL INTEREST	TITLE SCREW- ROUND HEAD MACHINE (FOR ELECT. USE)	AN508
PROCUREMENT SPECIFICATION NOT REQUIRED	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 672-1 (COORDINATED)
1 MAY 73

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 5305-1503

APPROVED 6 APR 85 REVISED (A) 23 MAR 84