

A-A-109
September 18, 1979

COMMERCIAL ITEM DESCRIPTION

TENT, WALL TYPE

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers wall type tents for general purpose use (see figs 1 and 2).

Salient characteristics:

Size 10 x 12 feet (4 ft wall height) or
14 x 16 feet (4 ft wall height) as
specified by purchaser

Fabric. Pre-shrunk cotton army duck material with a water, mildew, and fire resistant finish and with a residual shrinkage of not more than 2 percent. Fabric weight not less than 12.29 ounces per square yard before treatment, nor more than 18.5 ounces per square yard after treatment.

Reinforcement. All stress points of tent reinforced with a second layer of self-material.

Door. Standard overlapping type with tie tapes stitched onto the outside and inside of the door; and with tieback tapes stitched along the edge of the upper front wall.

Peak opening. Peak opening to accomodate the protruding ends of the ridge pole placed on both back and front panels of the tent.

Guy ropes. Manila or sisal guy ropes furnished with each tent. Each rope has line slip mechanism for adjusting and holding tension.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.



Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Packaging, packing and marking. The tents shall be packaged in accordance with normal commercial practice and packed in fiberboard boxes that will assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling and storage. The shipping container shall be in compliance with National Motor Freight Classification and Uniform Freight Classification. Shipping containers shall be marked as specified in the contract or order.

Note. Purchaser should specify size of tent required. Dimensions in figures 1 and 2 are allowed the following tolerances: ± 2 inches for dimensions 4 feet or greater ± 10 percent for dimensions less than 4 feet.

A-A-109

Front View

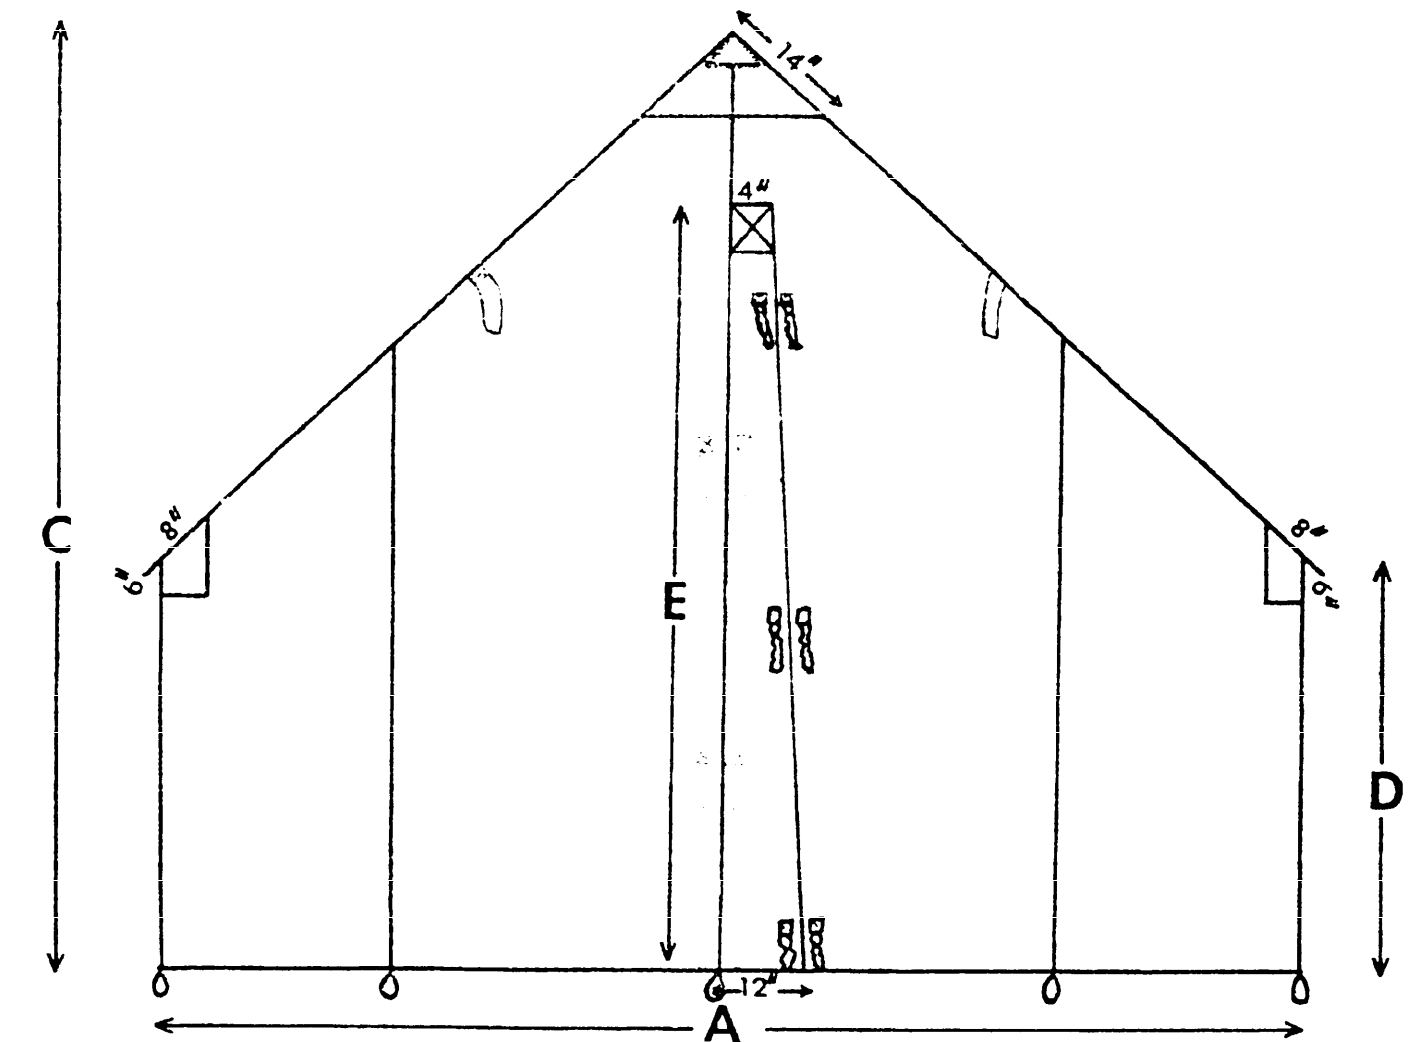


	A	B	C	D	E
size1	10'	12'	7.5'	4'	6.5'
size2	14'	16'	8.5'	4'	7'

Figure 1

A-A-109

Side View

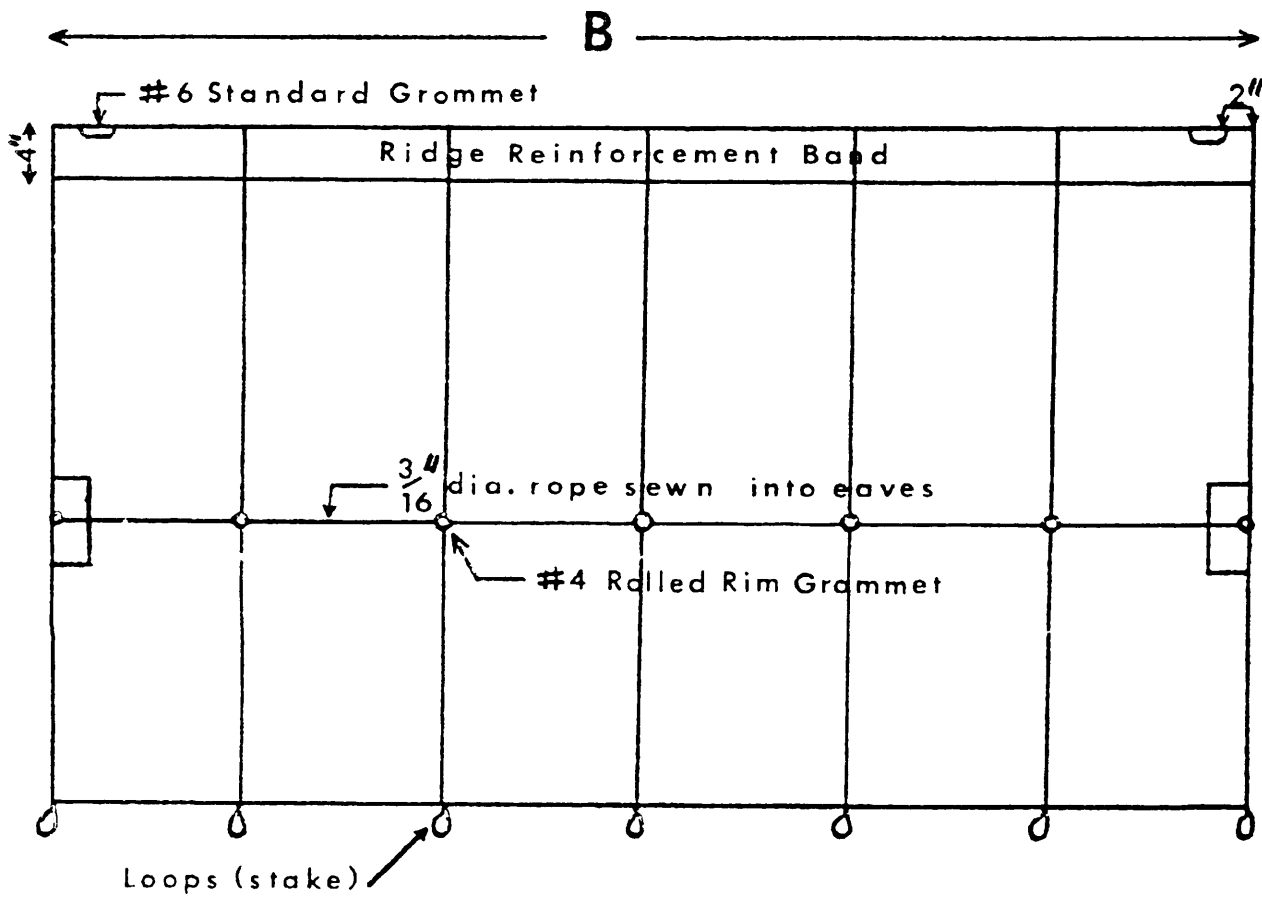

Number of seams, grommets, and stake down loops shown in figures 1 & 2 does not represent actual number that may be needed.

Figure 2