

[METRIC]
A-A-2110A
December 1, 1998
SUPERSEDING
A-A-2110
December 8, 1982

COMMERCIAL ITEM DESCRIPTION

BAG, CANVAS, HARDWARE

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. **SCOPE.** This document covers cloth hardware bags designed for the user to protect an item or items when not in use.

2. SALIENT CHARACTERISTICS.


2.1. **Construction and materials.** The bags shall be made of plain soft weave, unbleached cotton duck with a minimum weight of 417 gm/m^2 (12.29 oz/yard^2). The inside dimensions of the bag shall be $191 \pm 7 \text{ mm}$ ($7\text{-}1/2'' \pm 1/4''$) wide by $9\text{-}1/2'' \pm 1/4''$ long (See Fig.1). The bag shall be designed with a flap closure $83 \pm 7 \text{ mm}$ ($3\text{-}1/4'' \pm 1/4''$) long and a corrosion resistant snap fastener. The top half of the fastener shall be located $25 \pm 3.2 \text{ mm}$ ($1'' \pm 1/8''$) from the flap edge and centered. The bottom half of the fastener shall be suitably centered on the body of the bag to receive the top half of the fastener to provide a neat closure. The fastener shall be not less than 13 mm ($1/2''$) in diameter. The bag shall be sewn with polyester thread six to eight stitches per 25 mm ($1''$), or any other thread used commercially for this purpose at the option of the contractor. Thread breaks in all stitching shall be overstitched not less than 25 mm ($1''$) at each break. Thread tension shall be maintained to avoid loose stitching. All threads ends shall be trimmed. The seams of the bag shall be a maximum of 4.7 mm ($3/16''$) from the edge of the material. Seams shall be evenly maintained and properly sewn to avoid runoffs, twists, pleats, or puckers. The bag shall be provided with a 13 mm ($1/2''$) minimum wide cloth tape tie. The tie shall be securely attached to each side of the bag, inside, at the flap closure fold. The ties shall extend a minimum of 178 mm ($7''$) from each side.

2.2. **Workmanship.** The bags shall be uniformly constructed and free from holes, cuts, splits, or other defects which may affect their serviceability.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document, should be sent to: General Services Administration, Federal Supply Service, 26 Federal Plaza, New York N.Y. 10278 ATTN: Engineering Branch (2FYEE).

A-A-2110A

FIG. 1

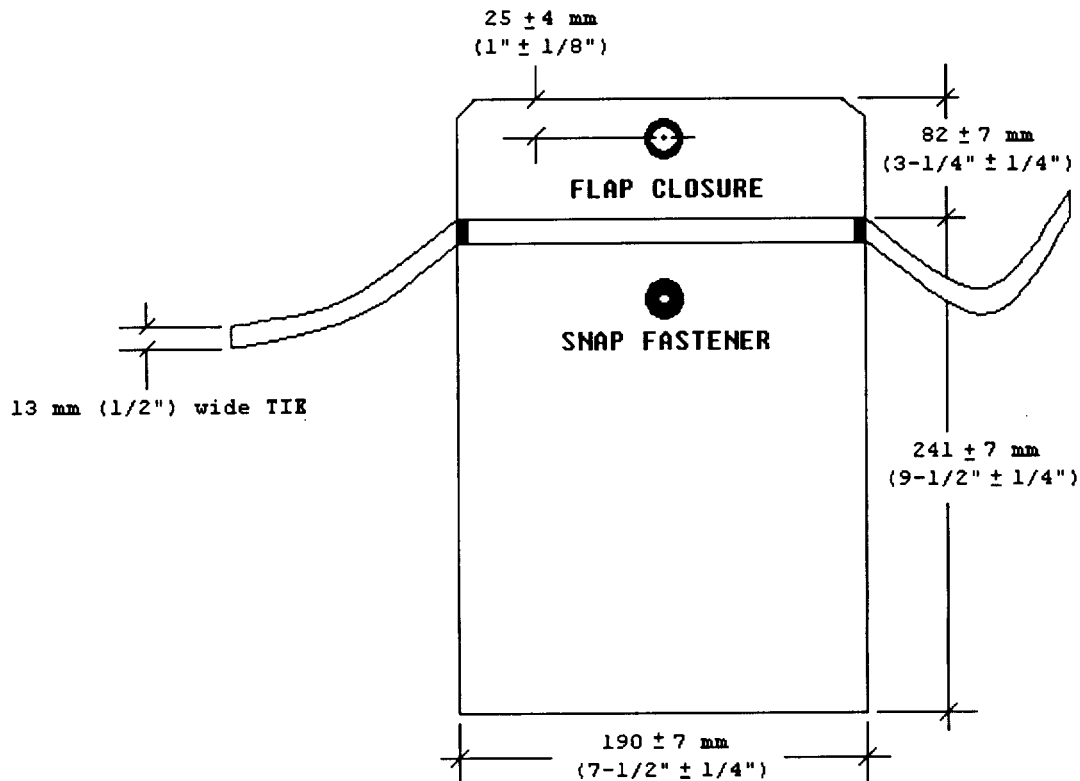

3. **PRODUCT CONFORMANCE.** The product provided shall meet the salient characteristics of this commercial item description, conform to producer's own drawings, specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

4. **REGULATORY REQUIREMENTS:** In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

5. **PACKAGING, PACKING, AND MARKING:** Shall be as specified in the contract or purchase order.

A-A-2110A

6. Notes.

6.1. Ordering data. Purchasers shall specify the following in the contract or purchase order:

6.1.1. Title, number, and date of this Commercial Item Description.

6.1.2. Packaging, packing, and marking required.

6.2. List of NSNs:

8105-00-897-0653

MILITARY INTERESTS:

NONE REGISTERED

PREPARING ACTIVITY:

GSA-FSS