

INCH-POUND

A-A-55059

04 JUNE 1992

COMMERCIAL ITEM DESCRIPTION

CARRIER, POLICEMAN'S CLUB, WITH GROMMET

The General Services Administration has authorized the use of this commercial item description in preference to Military Specification MIL-C-1933.

Abstract. The carrier is intended for use by members of the Military Police and is used with a leather belt. This CID covers the requirements for one type of carrier, and one type of rubber grommet for a policeman's club.

SALIENT CHARACTERISTICS

General Description. The Carrier shall consist of a strap 3/4 inch width, 8/64 to 9/64 inch thick, approximately 9 inch length looped at both ends. The loops will consist of a large loop to fit on belt and a small loop with 1-3/4 inch metal O-ring inserted. A metal rivet will connect both loops. There will also be one rubber Grommet Stopper with 1-3/16 inch inside diameter and 2-5/32 inch outside diameter. The rubber retaining grommet is designed to be placed on the club to prevent it from

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release;
distribution is unlimited.

A-A-55059

sliding through the O-ring of the carrier. Figures are furnished for information purposes only. Drawing number 2-9-305 covers the Carrier, Policeman's Club. Copies of this drawing should be obtained from the procuring activity or as directed by the contracting officer. When inconsistencies exist between the written commercial item description and the figures, the written commercial item description shall govern.

Material. The strap shall be made of leather, cattlehide (full grain or corrected grain) mildew resistant and treated with a fungicide containing not less than 0.18 percent nor more than 0.70 percent paranitrophenol. The grain side of the leather, shall be black, and have a smooth finish. The edges of the leather strap shall be treated with a non-staining black finish so as to match the grain side. The metal rivet and cap shall have a black oxide coating. The metal O-ring shall be black in color. The grommet shall be made of rubber.

QUALITY ASSURANCE

Product Demonstration Model. When required, offerers shall submit (2) Carriers and Grommets of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Certification. The contractor shall certify, and maintain objective quality evidence, that the product offered meets this commercial item description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Visual Examination. The inspection level shall be II and the AQL expressed in defects per one hundred shall be 4.0 in accordance with ANSI/ASQC Z1.4. The Carrier and Grommet shall be examined for the following defects: not specified color; color not uniform; grain side not smooth finished; edge not stained to match grain side; any component omitted or misplaced; part fractured, ripped, punctured, torn, defective, malformed, or damaged; hole cut or rupture; Brand mark; healed grub damage, scar tissue, hip mark, brittle or bony area; abraded, scratched,

A-A-55059

or other grain damage; flaky, spongy, pipey or stretchy leather; Any wrinkle; O-ring defective or not securely affixed; rivet not sufficiently set; sharp edge, burr or metal sliver; any non-removable stain or spot.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

PACKAGING

Packaging, Packing, Marking and Palletization.

Packaging, packing marking and palletization shall be in accordance with ASTM-D 3951, Standard Practice for Commercial Packaging, as specified for shipments to the Department of Defense, including section 7.

Unitized loads, placing boxes on pallets, shall be used whenever total quantity for shipment to one destination exceeds 250 pounds (excluding the pallet) or 20 cubic feet. Pallets shall have a length of 40 inches and a width of 48 inches. Pallet loads, including the pallet, shall not exceed 54 inches in height, 43 inches in length and 52 inches in width.

The containers shall be bonded onto wing type commercial 4-way entry pallets.

Prohibited Packing Materials. The use of asbestos, excelsior, newspaper or shredded paper (all types including waxed paper, computer paper and similar hygroscopic or non-neutral material) is prohibited.

Notes

Application for copies of ASTM D 3951 should be addressed to the American Society for testing and materials, 1916 Race St., Philadelphia PA 19103-1187.

Application for copies of ANSI Z1. 4 should be addressed to the American National Standards Institute, 11 West 42nd St., New York, NY 10036 (ATTN: Sales Dept.)

Custodian:

Army - GL
Air Force - 99

Civil Agency Coordinating
Activity:
GSA - FSS

Review Activity:

Army - GL
Air Force - 45, 82

Preparing Activity:
DLA - CT

Project No.
8465-0095

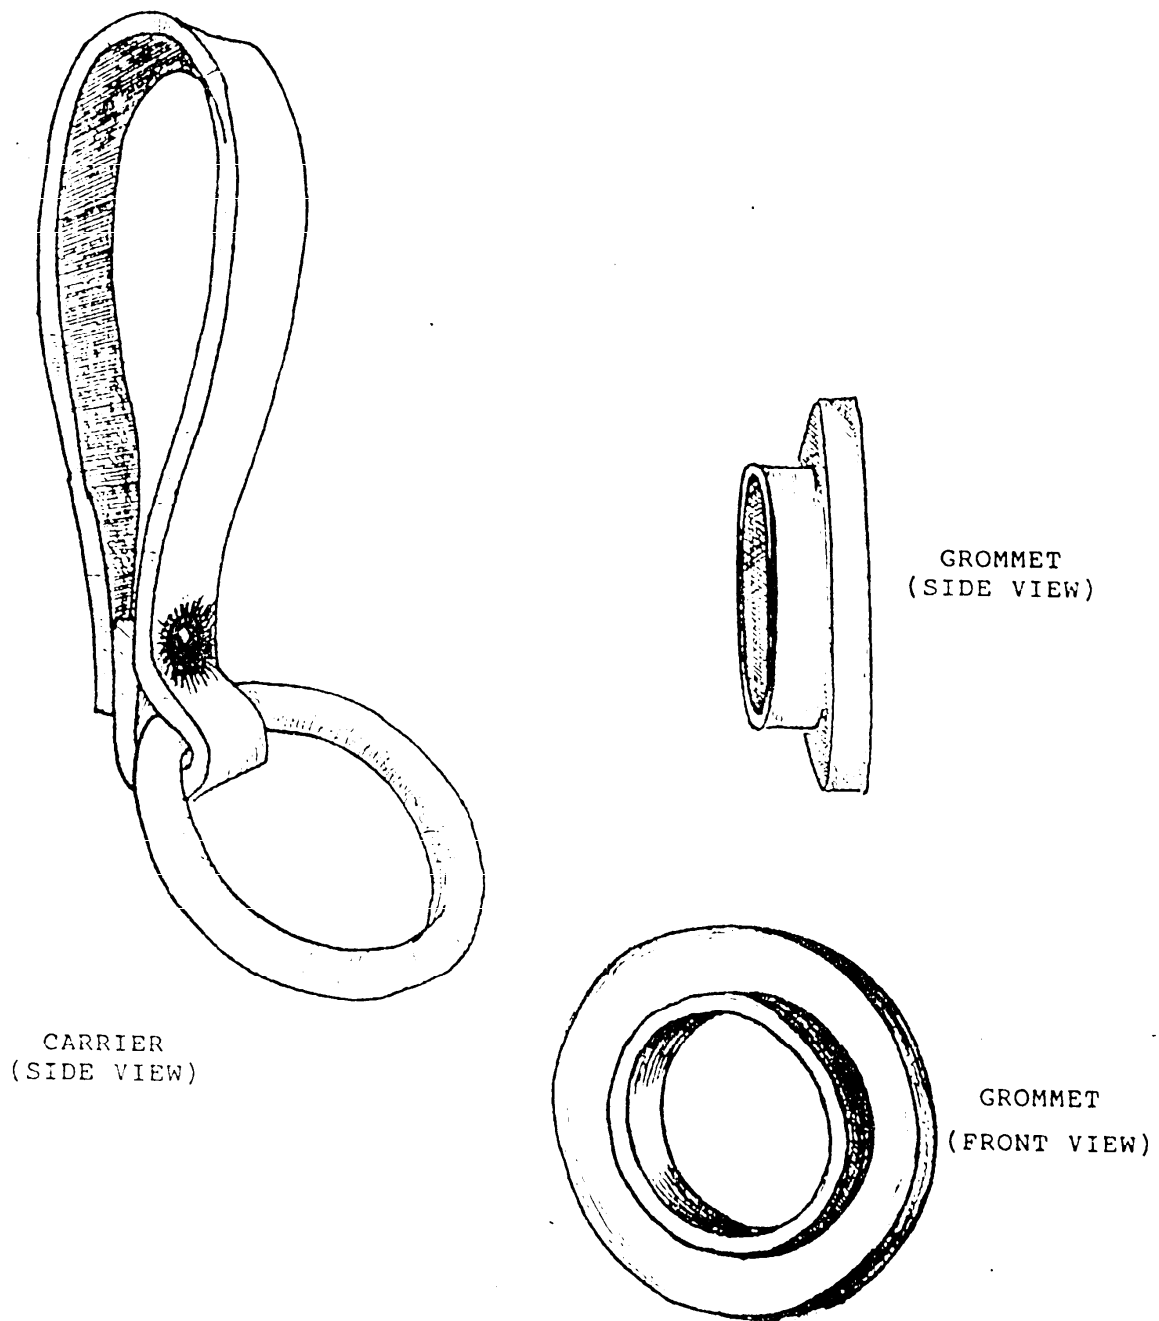


Figure 1 - CARRIER, POLICEMAN'S CLUB, WITH GROMMET

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:

 1. DOCUMENT NUMBER
A-A-55059

 2. DOCUMENT DATE (YYMMDD)
92/06/04

3. DOCUMENT TITLE

CARRIER, POLICEMAN'S CLUB, WITH GROTNET

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)

b. ORGANIZATION

c. ADDRESS (Include Zip Code)

 d. TELEPHONE (Include Area Code)
 (1) Commercial
 (2) AUTOVON
 (if applicable)

 7. DATE SUBMITTED
 (YYMMDD)

B. PREPARING ACTIVITY

a. NAME

DLA-CT

 b. TELEPHONE (Include Area Code)
 (1) Commercial
 (215) 737-8105

 (2) AUTOVON
 (DSN) 444-8105

 c. ADDRESS (Include Zip Code)
 DEFENSE PERSONNEL SUPPORT CENTER
 2800 S. 20th St. (DPSC-FSSD/Bldg. 12-3-D)
 Philadelphia, PA 19101-8419

 IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:
 Defense Quality and Standardization Office
 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466
 Telephone (703) 756-2340 AUTOVON 289-2340