


RESISTORS, ADJUSTABLE, WIRE WOUND, POWER TYPE

The complete requirements for procuring adjustable wire wound power resistors described herein, shall consist of this document and the issue in effect of CID A-A-59715.

CLASSIFICATION. This CID uses a classification system which is included in the Part Identification Number (PIN) (see 7.1). The PIN shall be AA5971502-*****. Complete PIN example AA5971502-A1002J.

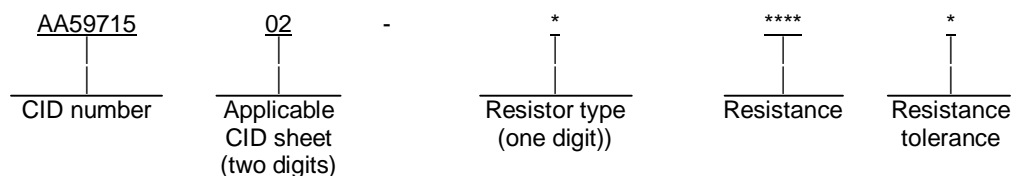

SALIENT CHARTACTERISTICS.


Interface and physical dimensions. The resistors supplied to this CID shall meet the interface and physical dimensions as specified herein (see figure 1).

Resistor type. Designates the type and power rating of each resistor (see table 1).

Table 1 Resistor type.

Designation	Wattage (25°C)	Resistance range (in ohms)
A	12.00	1.0 to 10,000
B	25.00	1.0 to 25,000
C	50.00	1.0 to 100,000
D	75.00	1.0 to 100,000
E	100.00	1.0 to 100,000
F	175.00	1.0 to 100,000
G	225.00	1.0 to 100,000
H	500.00	1.5 to 15,000
J	1000.00	3.0 to 27,700

A-A-59715/2

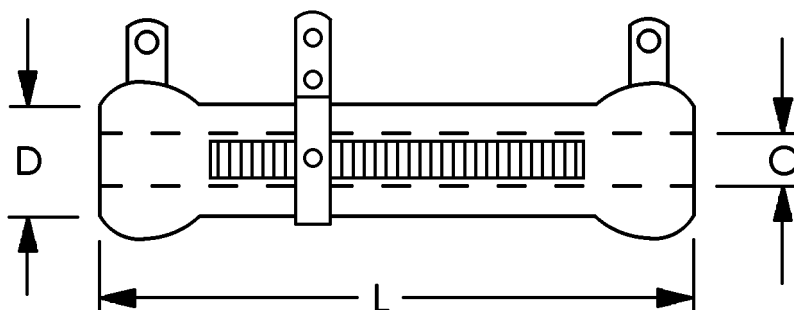

Designation	Dimensions		
	C	D	L
A	0.188	0.313	1.750
B	0.313	0.562	2.000
C	0.313	0.562	4.000
D	0.313	0.562	6.000
E	0.500	0.750	6.500
F	0.750	1.125	8.500
G	0.750	1.125	10.500
H	1.750	2.500	12.000
J	1.750	2.500	20.000

Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.188	4.76	0.750	19.10	2.500	63.50	8.500	215.90
0.313	7.94	1.125	28.60	4.000	101.60	10.500	266.70
0.500	12.70	1.750	44.40	6.000	152.40	12.000	304.80
0.562	14.30	2.000	50.80	6.500	165.10	20.000	508.00

NOTES:

1. Dimensions are in Inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Resistor, Adjustable.

A-A-59715/2

Resistance. The nominal resistance value expressed in ohms is identified by a four-digit number; the first three digits represent significant figures and the last digit specifies the number of zeros to follow. Resistance values for specific resistors are covered in the individual CID sheets. When the value of resistance is less than 100 ohms, or when fractional values of an ohm is required, the "R" will be substituted for one of the significant digits to represent the decimal point. When the letter "R" is used, succeeding digits of the group represent significant figures. The resistance value designations are shown in table II below.

Table II Designation of resistance values.

Designation	Resistance (in ohms)	
1R00 to 9R99 incl.	1.0 to	9.99 incl.
10R0 to 99R9 incl.	10.0 to	99.9 incl.
1000 to 9990 incl.	100 to	999 incl.
1001 to 9991 incl.	1,000 to	9,990 incl.
1002 to 9992 incl.	10,000 to	99,900 incl.
1003	100,000	

Resistance tolerance. The resistance tolerance available is K (± 10 percent).

Power rating. The power rating shall be specified in table I, at 25°C, derated to zero at 350°C.

Temperature coefficient of resistance (TCR). The temperature coefficient of resistance (TCR) is as follows:

<u>Resistance</u>	<u>TCR (ppm/°C)</u>
All values	± 260

Marking. Resistors supplied to this CID shall be marked with the manufacturer's (MFR's) standard commercial PIN.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these resistors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE Code 58536 should be used.

Source of documents.

Commercial Item Description

A-A-59715 - Resistors, Fixed and Adjustable, Wire Wound, Power Type, General Requirement for.

(Copies of commercial item descriptions are available from the Document Automation and Production Service, Building 4D (DPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094)

Ordering data. Ordering data is as specified in A-A-59715.

A-A-59715/2

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of the CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown).

Manufacturer's CAGE

44655

Manufacturer's name and address

Ohmite Manufacturing Company
3602 Howard Street
Skokie, IL 60076

Plant :

Baja Oriente
Calle 8 Esquina Calle Cuarta, S/N
Parque Industriial Fondeport el Sauzal
Ensenada, Baja California, Mexico, 22760

Part number (P/N) supersession data. This CID supersedes the following MFR's P/N as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

MFR's CAGE	Designation	MFR's style ^{1/}
44655	A	D12* -****
	B	D25* -****
	C	D50* -****
	D	D75* -****
	E	D100* -****
	F	D175* -****
	G	D225* -****
	H	D500* -****
	J	D1000* -****

^{1/} The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown.

Government users. To acquire information on obtaining these resistors from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-CP, Post Office Box 3990, Columbus, OH 43213-5000, or telephone (614) 692-7684.

MILITARY INTERESTS:

Custodian

NAVY - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

Preparing Activity:

DLA - CC

Project 5905-1651-02