

METRIC

MIL-STD-1678-5
28 May 2010
SUPERSEDING
DOD-STD-1678 (IN PART)
30 November 1977
(See [6.6](#))

DEPARTMENT OF DEFENSE
STANDARD PRACTICE

FIBER OPTIC CABLING SYSTEMS REQUIREMENTS AND MEASUREMENTS

(Part 5: DESIGN PHASE AND LEGACY MEASUREMENTS)

(PART 5 OF 5 PARTS)



MIL-STD-1678-5

FOREWORD

1. This Department of Defense Standard Practice is approved for use by the Defense Supply Center Columbus, Defense Logistics Agency, and is available for use by all Departments and Agencies of the Department of Defense.
2. Comments, suggestions or questions on this document should be addressed to Defense Supply Center Columbus, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990, or emailed to FiberOpticGroup@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at <https://assist.daps.dla.mil>.
3. This standard practice provides detailed information and guidance to personnel concerned with ensuring standardization of fiber optic cable topologies (optical fiber cabling and associated components) on military mobile vehicles used in air, land, and sea applications. In general, the requirements and methods specified herein are not identifiable to any specific mobile vehicle class or type, but are intended to standardize and minimize variations in requirements, test setups, test measurement procedures, test sample fabrication configurations, and other aspects that must be addressed for completeness. Where specified, constraints for usage or platform types will be listed. The term "platform" will be used to refer to the military mobile vehicles in general or, where designated, one particular class (such as "aircraft platform") or one particular type within that class (such as "F-35").
4. In order to provide flexibility in the use and update of the different aspects for requirements and methods, this standard practice is issued in five parts; as follows:
 - Part 1: Design, installation and maintenance requirements. This part addresses design requirements for platforms that use cable harnesses as the means to transport data through optical fiber among communication network and end user equipment. Larger platforms that route trunk cables through cableways and drop cables to the end user (application equipment), can cite applicable requirements in Part 1 of the Standard Practice and augment them with use of MIL-HDBK-2051 and MIL-STD-2042 as appropriate. Surface ships and submarines, are to use MIL-HDBK-2051 and MIL-STD-2042 in lieu of Part 1 of this Standard Practice.
 - Part 2: Optical measurements. Part 2 of this standard practice addresses further details to refine or bound (constrain) the performance of each optical test measurement addressed. The test methods, such as those in a TIA-455 series standard or military standard/specification, are cited already. This part of the standard practice augments the test method in the standard or specification to ensure consistency with setup and measurement procedure. This consistency minimizes variations when comparing data obtained from different test laboratories (including commercial, vendor, Government and Government contractor).
 - Part 3: Environmental, mechanical and physical measurements. Part 3 of this standard practice addresses further details to refine or bound (constrain) the performance of each environmental (including material), mechanical and physical test measurement or inspection addressed. The test methods, such as those in a TIA-455 series standard or military standard/specification, are cited already. This part of the standard practice augments the test method to ensure consistency with setup, measurement procedure, data recording/analysis and other factors critical to conducting or evaluating test performance. This consistency minimizes variations when comparing data obtained from different test laboratories (including commercial, vendor, Government, and Government contractor).
 - Part 4: Test sample preparation/fabrication requirements. Part 4 of this standard practice addresses further details to refine or bound (constrain) the preparation and fabrication of test samples for the fiber optic components addressed. Fabrication methods, such as those in the Shipboard installation standard, MIL-STD-2042, or in the general series aircraft maintainer's manual, NAVAIR 01-1A-505-4/TO 1-1A-14-1, are cited already. This part of the standard practice augments the fabrication method to ensure consistency with use of the same components (such as cable types) and processes.

MIL-STD-1678-5

Part 5 Design phase and legacy measurements. Tests that are more unique to the design phase are addressed in Part 5 of this standard practice. These test methods are provided in this part of the standard practice with the recommended replacement method. These latter test methods are listed under the constraint that they be used only with the specific military specifications or commercial standards in which they are cited. The intent is to delete each DOD-STD-1678 test method from that standard practice in Part 5 once its reference from military specification or commercial standard is removed.

MIL-STD-1678-5

CONTENTS

<u>PARAGRAPH</u>	<u>PAGE</u>
1. SCOPE	1
1.1 Scope	1
1.1.1 Applicability	1
1.2 Intended uses for Part 5	1
1.2.1 Primary uses of Part 5	1
1.2.2 Supplemental use	1
1.2.3 Constraints on use	1
2. APPLICABLE DOCUMENTS	2
2.1 General	2
2.2 Government documents	2
2.2.1 Specifications, standards and handbooks	2
2.2.2 Other Government documents	2
2.3 Non-Government documents	2
2.4 Order of precedence	2
3. DEFINITIONS	3
3.1 General fiber optics terms	3
3.2 Acronyms	3
3.3 Parameter, application	3
3.4 Qualification testing, general	3
3.5 Qualification testing, QPL process	3
3.6 Single parameter testing	3
4. GENERAL REQUIREMENTS	4
4.1 Test sample configurations	4
4.2 Environmental conditions	4
4.3 Test conditions	4
4.4 Laser and fiber optic safety compliance	4
4.5 Use of a standardize approach	4
4.5.1 Design (developmental) testing	4
4.5.2 Legacy support processes	4
4.5.3 Residual DOD-STD-1678 content	4
4.5.3.1 Restrictions on use	4
4.6 Inspection by attributes	5
5. DETAILED REQUIREMENTS	6
5.1 Design phase measurements	6
5.1.1 Temperature-altitude	6
5.1.2 Accelerated stress (vibration with temperature stimuli)	6
5.2 Legacy measurements, general	6
5.2.1 End face geometry inspection	6
5.2.2 Change in optical transmittance	6
5.3 Legacy measurement support processes, general	6
5.3.1 Launch conditions	6
5.4 Legacy measurements, residual DOD-STD-1678 Methods	6
5.4.1 Low temperature flexibility (cold bend), Method 2020	6
5.4.2 Power transmission versus temperature, Method 4010	6
5.4.3 Power transmission versus humidity, Method 4030	6
5.4.4 Freezing water immersion – ice crush, Method 4050	6

MIL-STD-1678-5

<u>PARAGRAPH</u>	<u>PAGE</u>
6. NOTES	7
6.1 Intended use	7
6.2 Acquisition requirements	7
6.3 Subject term (key word) listing	7
6.4 Changes from previous issue	7
6.5 Single versus multiple parameter testing	7
6.5.1 Approach for qualification	7
6.5.2 Approach for design phase (developmental) testing	7
6.6 Superseding document	7
MEASUREMENTS	
Design phase measurements	
5101 Temperature-altitude	9
5102 Accelerated stress (vibration with temperature stimuli)	15
Legacy measurements, general	
5201 End face geometry inspection	31
5202 Change in optical transmittance	40
5203 Attenuation rate legacy criteria	42
Legacy measurement support processes, general	
5301 Launch conditions legacy criteria	45
Legacy measurements, residual DOD-STD-1678 Methods	
5401 Low temperature flexibility (cold bend), Method 2020	51
5402 Power Transmission vs. temperature, Method 4010	59
5403 Power Transmission vs. humidity, Method 4030	64
5404 Freezing water immersion – ice crush, Method 4050	69

MIL-STD-1678-5

1. SCOPE

1.1 Scope. Part 5 of this standard practice provides further details to refine or bound (constrict) the performance of each legacy measurement addressed.

1.1.1 Applicability. Part 5 of this Standard Practice was developed to retain applicable legacy test requirements, test methods, and support processes to be used for performing testing of fiber optic components. The rapidly changing state of the art in fiber optic technology makes it essential that some degree of flexibility be exercised in enforcing this document. When there is a conflict between this document and the platform specification or contract, the platform specification or contract shall take precedence. Where obsolescence or other issues are such that the measurement requirements specified for the refinement or bound (constraint) herein cannot be implemented, users shall submit a description of the issue along with a request for clarification or with proposal for redefining the requirement to consider for incorporation into this standard practice to: Defense Supply Center Columbus, ATTN: VAT, Post Office Box 3990, Columbus, OH 43218-3990, or emailed to FiberOpticGroup@dla.mil.

1.2 Intended uses for Part 5.

1.2.1 Primary use of Part 5. Part 5 of this standard practice was prepared primarily to augment developmental testing performed prior to qualification.

1.2.2 Supplemental use. Part 5 of this standard practice is intended to retain measurements or their support processes that were once cited in other parts of this standard practice, or their precursors, and are relevant to retain for legacy purposes.

1.2.2.1 Residual DOD-STD-1678 content. Part 5 addresses some test methods cited in former DOD-STD-1678. Although the test methods cited in DOD-STD-1678 are considered obsolete, a few military specifications and commercial standards still refer to some of the test methods. This residual DOD-STD-1678 content is provided under the restrictions listed in 4.5.3.1.

1.2.3 Constraints on use. Part 5 of this standard practice is not intended to be used in lieu of a test laboratory developing test procedures specific to their test instrumentation and test equipment/apparatus.

MIL-STD-1678-5

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2 Government documents.

2.2.1 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this standard practice to the extent specified herein. Unless otherwise specified, the issues are these documents are those cited in the solicitation or contract.

NAVAIR 01-1A-505-4/	-	Aircraft Fiber Optic Cabling, Technical Manual, Installation and Testing
T.O. 1-1A-14-4/		Practices.
TM 1-1500-323-24-4		

(A copy of this Government General Series Technical Manual can be obtained at web Site: <https://www.navair.navy.mil/jswag>. At the home page select "Document Library" (on left side), then select the "JFOWG" folder followed by the "Maintenance Documents" folder.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are cited in the solicitation or contract.

LASER INSTITUTE of AMERICA (LAI)

LIA Z136.1	-	Safe Use of Lasers.
------------	---	---------------------

(Copies are available from <http://www.laserinstitute.org> or the Laser Institute of America, 12424 Research Parkway, Suite 125, Orlando, FDL 32826.)

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA-440	-	Fiber Optic Terminology.
TIA/EIA-455		Standard Test Procedure for Fiber Optic Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and Other Fiber Optic Components

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

MIL-STD-1678-5

3. DEFINITIONS

3.1 General fiber optics terms. Definitions for general fiber optics terms used in this standard practice are in accordance with EIA/TIA-440. Definitions for other terms as they are used in this standard practice are given in the following paragraphs.

3.2 Acronyms. The following acronyms are used in this standard practice:

DUT	Device under test
FOCT	Fiber optic cable topology

3.3 Parameter application. One criterion (a performance parameter) specified for a physical, mechanical, environmental, or material condition as a performance requirement of a FOCT (fiber optic cable topology) component. A value and unit of measure is included as part of the performance requirement for each criterion. Physical conditions include dimensional/geometry, weight, markings, and fabrication technique/workmanship. Mechanical conditions include pull (elongate/compress), twist, bend, incline, crush, vibrate, impact/shock. Environmental conditions include temperature, humidity, and altitude/pressure. Material conditions include conductivity and exposure to or immersion in flame, fluids, fungus, simulated salt air (with and without combustion products) and ozone.

3.4 Qualification testing, general. Formal testing designed to demonstrate that the software and hardware of a system meet specified requirements. Qualification testing may be accomplished at any time during the life of a system, such as during prototype development, manufacturing, shipment, storage, installation, and operation. Most often the qualification testing is conducted to determine the extent to which a system passes a specified set of performance criteria.

3.5 Qualification testing, QPL process. For purposes of this standard practice, qualification testing is refined and bounded to the term as used for Government Qualified Products List (QPL) testing or inspection. This testing is performed to determine if the FOCT (fiber optic cable topology) component or DUT (device under test) meets the requirements specified in the fiber optic component applicable military specification. Physical, optical, mechanical, environmental and material testing is performed in specified test sequences. One parameter is tested at a time. Successful completion places the DUT onto the QPL for that FOCT component military specification. Other terminology is to be used in lieu of qualification for any prototype development, manufacturing, shipment, storage, installation, and operational testing.

3.6 Single parameter testing. A test performed where only one mechanical, environmental or material application parameter is applied.

MIL-STD-1678-5

4. GENERAL REQUIREMENTS

4.1 Test sample configurations. Unless otherwise specified, test sample configurations shall comply with 4.1 in Part 2 of this standard practice.

4.2 Environmental conditions. Test equipment to perform the optical test measurements must be placed in an area in which specified ambient temperature and humidity conditions are maintained. "Standard Ambient" conditions ($23 \pm 5^{\circ}\text{C}/73 \pm 9^{\circ}\text{F}$ and 20 percent to 70 percent RH), in accordance with TIA/EIA-455, is acceptable if the test equipment is built to operate throughout that ambient temperature and humidity range. If not, then the "Controlled Ambient" conditions ($23 \pm 2^{\circ}\text{C}/73 \pm 4^{\circ}\text{F}$ and 45 percent to 55 percent RH) are to be followed. Testing can be performed only when the acceptable conditions exist for uncontrolled spaces where local weather is normally within the "Standard Ambient" range (or the specified test equipment operating ambient conditions, whichever is more conservative).

4.3 Test conditions. Unless otherwise specified, test sample conditions shall comply with 4.5 in Part 2 of this standard practice. These test conditions include test interruption, test recording requirements for environmental chambers, multiple channel optical monitoring, and recording and verifying pass/fail criteria.

4.4 Laser and fiber optic safety compliance. At a minimum, compliance should include the precautions of 4.5 cited in Part 2 of this standard practice. Refer to LIA Z136.1 for full technical definitions. Refer to NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/TM 1.1500-323-24-4 for a laser safety refresher summary and tailor to application.

4.5 Use of a standardized approach. Part 5 of this Standard Practice was developed to retain applicable legacy test requirements, test methods, and support processes to be used for performing testing of fiber optic components. In addition, Part 5 was developed to standardize on testing that may be performed that is unique to the design phase of the product development. It became evident that standardization must be maintained to ensure that the risk to the Government of accepting bad test/measurement data was low. Without standardization; setup, testing, and data extraction/analysis did not provide consistent conditions or were of questionable stability. To minimize test variations and permit more accurate comparison of test results from multiple sources, a "standardized" approach evolved. Use of the legacy measurements in lieu of the standardized or "prescription" approach, as cited in the other parts of this standard practice, shall be used only when specified in the contract or military specification. The three applications where design phase and legacy testing shall be used are cited in 4.5.1 through 4.5.3.

4.5.1 Design phase (developmental) testing. Unless otherwise specified, standardize on setup and contents of testing performed for component development and prototype efforts. Where applicable, testing specified for qualification shall be used or included. As required, multiple parameter testing specified as the applicable measurements under design phase testing in Part 5 of this standard practice shall be considered to augment the design phase test or test sequence.

4.5.2 Legacy support processes. Unless otherwise specified, the measurements and support processes cited in the other parts of this standard shall be used. For purposes of supporting already performed legacy testing and where suitability for developmental testing necessitates its use, the legacy support processes in Part 5 of this standard practice shall be considered to support verification of legacy test results and to complete an otherwise lacking developmental test setup or test process.

4.5.3 Residual DOD-STD-1678 content. Unless otherwise specified, the test methods cited in DOD-STD-1678 are considered obsolete; however, a few military specifications and commercial standards still refer to some of the test methods. These test methods are provided in this part of the standard with the recommended replacement method.

4.5.3.1 Restrictions on use. These residual DOD-STD-1678 test methods are contained in Part 5 of this standard practice under the constraint that they be used only with the specific military specifications or commercial standards in which they are cited. The intent is to delete each DOD-STD-1678 test method from that standard practice in Part 5 once its reference from current military specifications or commercial standards is removed completely.

MIL-STD-1678-5

4.6 Inspection by attributes. The random sampling alternative and inspection by attributes are applicable for the specified quality conformance inspections only. For design phase (or developmental) testing, for qualification and for initial validation of the process, inspection shall be performed on 100 percent of samples with data supplied. Data includes a value and unit of measure for each measurement required on each sample. Inspection by attributes is inspection in which each sample is measured then rated as conforming or nonconforming with respect to a given specification requirement or set of requirements.

MIL-STD-1678-5

5. DETAILED REQUIREMENTS

5.1 Design phase measurements. Measurements shall be implemented as specified in 5.1.1 and 5.1.2.

5.1.1 Temperature-altitude. Measurements shall be performed to Measurement [5101](#).

5.1.2 Accelerated stress (vibration with temperature stimuli). Measurement shall be performed to Measurement [5102](#).

5.2 Legacy measurements, general. Legacy measurements shall be implemented as specified or defined for historical purposes as listed in 5.2.1 and 5.2.3.

5.2.1 End face geometry inspection. Measurement inspections shall be performed to Measurement [5201](#).

5.2.2 Change in optical transmittance. Measurement criteria contents shall be listed only for historical information as Measurement [5202](#).

5.2.3 Attenuation rate legacy criteria. Measurement criteria contents shall be listed only for historical information as Measurement [5203](#)

5.3 Legacy measurement support processes, general. Legacy measurement support process shall be implemented as specified or defined for historical purposes as listed in 5.3.1.

5.3.1 Launch conditions. Measurement support criteria contents shall be listed only for historical information as Measurement Support Process [5301](#).

5.4 Legacy measurements, residual DOD-STD-1678 methods. Alternative processes for measurements or the original methods, as applicable, shall be implemented as specified in 5.3.1 through 5.3.4 (see table I, Original DOD-ST-D678 methods and MIL-STD-1678-5 alternative methods).

TABLE I Original DOD-STD-1678 methods and MIL-STD-1678-5 alternative methods.

DOD-STD-1678 Legacy test method	MIL-STD-1678-5 Alternative test method
2020	5401
4010	5402
4030	5403
5040	5404

5.4.1 Low power flexibility (cold bend), Method 2020. Alternative process for measurements or the original Method 2020, as applicable, shall be performed to Measurement [5401](#).

5.4.2 Power transmission versus temperature, Method 4010. Alternative process for measurements or the original Method 4010, as applicable, shall be performed to Measurement [5402](#).

5.4.3 Power transmission versus humidity, Method 4030. Alternative process for measurements or the original Method 4030, as applicable, shall be performed to Measurement [5403](#).

5.4.4 Freezing water immersion – ice crush, Method 4050. Alternative process for measurements or the original Method 4050, as applicable, shall be performed to Measurement [5404](#).

MIL-STD-1678-5

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The measurements depicted in this standard practice are intended for qualification testing; however, they are applicable for other types of test or evaluation programs that require these specific measurements for fiber optic cabling components used on military mobile vehicles (such as platforms).

6.2 Acquisition requirements. Acquisition documents should specify the following:

- a. Title, number, and date of this standard practice.

6.3 Subject term (key word) listing.

Fiber optic cabling
Legacy optical measurements

6.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

6.5 Single versus multiple parameter testing. The different philosophies for qualification versus developmental testing are elaborated further in 6.5.1 and 6.5.2. Methods to perform selected multiple parameter tests as part of the component development cycle are included as measurements in Part 5 of this standard practice.

6.5.1 Approach for qualification. For Qualified Products List (QPL) testing (hereinafter, qualification testing) of fiber optic cable topology (FOCT) components, the approach, in general, is to test one parameter at a time. For mechanical testing, the test sequence is performed from least severe to most severe. For environmental testing, a test sequence was selected based on service conditions and impact from previous tests. The same components go through the entire mechanical or the entire environmental test sequence. In this manner, the components are subjected to a pseudo accelerating aging or lifetime usage. This sequence is done to provide a "more confidence" factor while still testing one parameter at a time. FOCT components tested to date that meet this single parameter testing have performed successfully in the intended application. No justification exists to impose multiple parameter testing requiring more elaborate test apparatus for purposes of verifying each performance requirement is met.

6.5.2 Approach for design phase (developmental) testing. For the design phase of new components, performance under a variety of conditions may be imposed. This is done to ensure potential failure mechanisms are not accelerated significantly when induced with conditions from multiple parameters. This testing is done to assess impact on a component type, not for vendor specific product. Once verified in the design phase testing cycle, multiple parameter testing is excluded in component qualification.

6.6 Superseding document. The five parts of the standard practice replaces superseded DOD-STD-1678 with completely new fiber optic requirements and measurements. With the exception of some legacy material in Part 5 of this standard practice, none of the fiber optic test and measurement material comprising superseded DOD-STD-1678 has been included. Also, no methods in superseded DOD-STD-1678 have been revised in this standard practice. With the exceptions noted in Part 5 of this standard practice, this standard practice should be applied in lieu of the legacy methods in superseded DOD-STD-1678.

MIL-STD-1678-5

DESIGN PHASE MEASUREMENTS

5101 - 5102

MIL-STD-1678-5

MEASUREMENT 5101

TEMPERATURE-ALTITUDE.

1. Purpose. This multiple parameter measurement is performed when there is the requirement to subject the FOCT (fiber optic cable topology) component or device under test (DUT) to cyclic effect for the two stimuli of temperature and altitude. This multiple parameter test is not intended to be used as part of qualification testing. Measurement 5101 is intended to standardize on the multiple parameter testing when the two test parameters or stimuli are temperature and altitude as part of prototype or developmental test effort. The applicable commercial test standards cited are for temperature cycling (TIA-455-3) and altitude (TIA-455-15) with imposing further refinements or boundaries (constraints). To ensure that the risk to the Government of accepting bad optical measurement data is low, to minimize test variations and to permit more accurate comparison of test results from multiple sources, a "standardized" approach is specified to perform this measurement.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this specification, whether or not they are listed.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA-455-3	-	Procedure to Measure Temperature Cycling Effects on Optical Fibers Units, Optical Cable, and Other Passive Fiber Optic Components.
TIA-455-15	-	Altitude/Immersion of Fiber Optic Components.
TIA-455-20	-	Optical Fibres 1-46: Measurement Methods and Test Procedures: Monitoring of Changes in Optical Transmittance.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. DEFINITIONS.

3.1 Altitude test. A test performed to determine the integrity of a DUT sealing surfaces/devices and operational capability when simulating rapid descents from a high altitude.

3.2 Temperature cycling test. A test performed to determine the capability of an operational DUT when simulating temperature changes in the surrounding environment.

4. Test setup.

4.1 DUT submergence. The test samples shall not be submerged in a water tank within the chamber as specified in TIA-455-15.

MEASUREMENT 5101

MIL-STD-1678-5

4.2 DUT cabling connections. DUT cabling connections that interface with the ports on optical measurement instrumentation shall not be submerged and shall be either routed outside the chamber or to an optical interface port (at a plugged port hole in the chamber wall) so that during test, optical measurements can be obtained. The change in optical transmittance shall be measured during and after the test.

4.3 Test fixture and other non DUT masses inside the chamber.

4.3.1 Test fixture. If used, test fixture must be of minimum mass and approved by the Government technical authority.

4.3.2 Non DUT masses. No other mass (item that causes significant thermal lag) shall be added inside the chamber.

5. Test procedure.

5.1 Test method. DUT (test samples) shall be tested in accordance with TIA-455-3 for temperature and in accordance with TIA-455-15 for altitude using the number of cycles, test condition schedule, and ramp/soak times in accordance with [table 5101-I](#). The first 166 minutes of the profile shown in [figure 5101-1](#) is one cycle (one and a half cycles shown in the figure for clarity). This test shall consist of a total of 1,000 cycles.

5.1.1 Modification of the temperature cycle. The temperature cycling limits may be modified for conformance with the operating temperature range. If done, durations for both temperature and altitude cycles shall be modified also so that the same ramp rates occur and the same temperature cycling soak times are maintained. The checklist in [appendix A](#) is provided to ensure compliance for inspection purposes.

5.2 Optical measurements.

5.2.1 Change in optical transmittance. The change in optical transmittance shall be measured during and after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2. At a minimum for the "during test" measurements, an optical transmittance measurement shall be performed towards the end of each high temperature and low temperature soak period (maintain step in [table 5101-I](#)) and at the ambient soak period while at altitude after every 50 cycles.

5.2.2 Optical instrumentation capacity. This optical monitoring assumes that an optical measurement system is available with a sufficient channel measurement capacity. This capability reduces the number of both optical sources and monitoring channels required to one (one monitoring channel is needed for monitoring and compensating for drift in each optical source used).


5.2.3 Insertion loss. If more than the specified number of test samples is used (or that size exceeds test channel capacity), then test samples not selected for the change in optical transmittance measurement shall be measured for insertion loss. Insertion loss measurements shall be performed before the test sequence and after the conclusion of the test sequence.

5.3 Post test visual examination. Inspection of the DUT shall reveal no leakage or other apparent loss of sealing capability, no surface or identification marking impairment, nor any damage detrimental to the operation of the test samples.

5.4 End face geometry. When test samples are comprised of connectors or termini, the ferrule end face of each connector/termini mated pair shall be inspected for end face geometry. Inspection for end face geometry shall be performed before the test sequence and after the conclusion of the test sequence. Ferrule end face geometry shall be inspected as specified in [Measurement 5201](#).

MEASUREMENT 5101

MIL-STD-1678-5

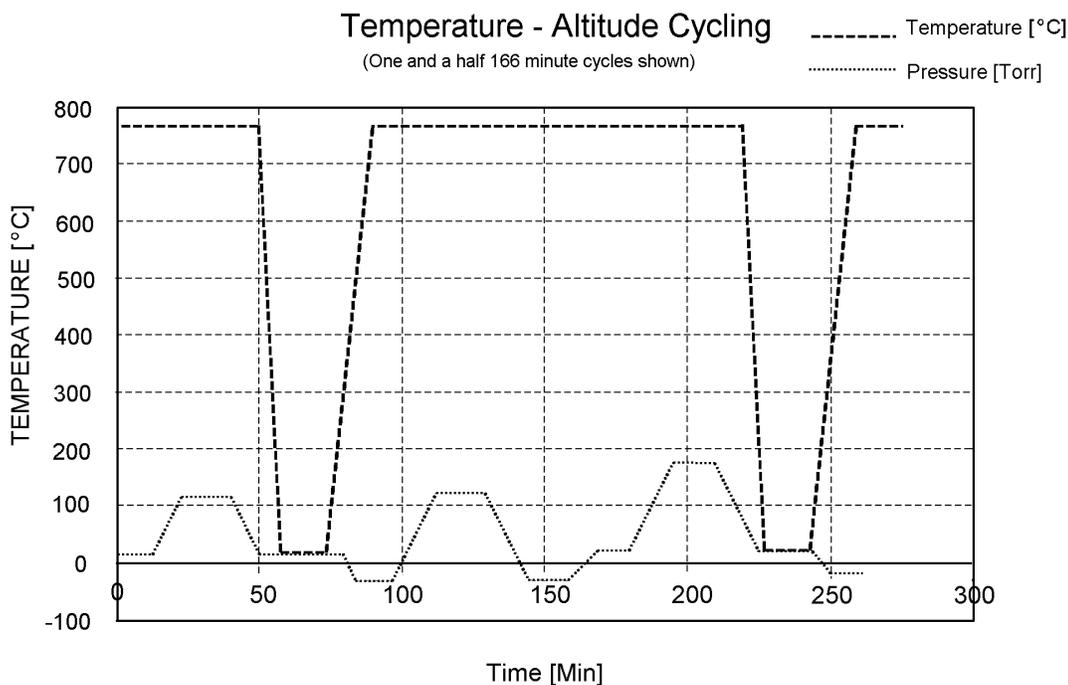FIGURE 5101-1. Temperature and altitude profiles.TABLE 5101-I. Ramp and soak limits for one cycle, profiles for temperature-altitude cycling.

Time (minutes)	Temperature (°C) 1/	Altitude (Torr)
0	25	760
15	25	760
25	125	760
40	125	760
50	25	760
55	25	33
70	25	33
75	25	760
81.5	-40	760
96.5	-40	760
113	125	760
128	125	760
144.5	-40	760
159.5	-40	760
166	25	760

1/ Ramp rate for temperature is 10°C per minute, soak time (maintain step) is 15 minutes at high and low temperature plateaus.

2/ Ramp rate for altitude is 5 minutes from atmosphere (760 Torr) to altitude (70,000 ft). Soak time (maintain step) is 15 minutes at altitude. Temperature during altitude ramp and soak is 25°C (for this 25 minute duration).

MEASUREMENT 5101

MIL-STD-1678-5

5.5 Contamination. When test samples are comprised of connectors or termini, the ferrule end face of each connector/termini mated pair shall be inspected for cleanliness after the completion of the test or during specified points during and after the completion of the test, as specified. Inspection shall be performed using a Fiber Optic Video Inspection System (FOVIS). As an option, each end face shall be captured using software provided with the FOVIS. For each cleaning operation performed, a table is requested to summarize the number of cleaning steps, cleaning device, cycle used, and result.

6. NOTES.

6.1 Intended use, developmental testing and evaluations. This test is to be used for developmental test and evaluation purposes only. Testing of a new design in development or performed as part of an evaluation is meant to discover flaws or defects. Multiple parameter testing (such as parameters of temperature and altitude) may uncover flaws more readily than single parameter testing; however, the parameter most critical to the failure is not identified. Also, multiple parameter testing may induce combined stresses or a degree of combined stresses not found in-service. The most significant stress conditions must be identified during developmental testing. These conditions are then incorporated into single parameter testing for qualification to show compliance with specification requirements.

6.2 Source for profiles. The temperature and altitude profiles for aircraft applications were developed by representatives from the reliability, wiring, and standards & technology communities.

MEASUREMENT 5101

MIL-STD-1678-5

MEASUREMENT 5101

APPENDIX A

MINIMUM ESSENTIAL CHECKLIST FOR TEMPERATURE ALTITUDE MEASUREMENTS

A.1 Purpose. This appendix addresses a checklist of the minimum essentials for the temperature-altitude measurement.

A.2 Usage. Table 5101 A-I is the checklist of minimum essentials for Government auditors, or their representatives, use during inspections. This checklist should be expanded at the auditor's discretion.

TABLE 5101 A-I. Minimum essential checklist for temperature-altitude measurements.

Item	Category	Description	Requirement	Compliance
1	Test sample configuration	Cable assembly length:	10 meters minimum (13 m if 3 cut-backs)	
		Connectors & splices	Complies with Part 4 of this standard practice	
2	Room ambient environmental condition	Standard Ambient (if test equipment built to operate in this range, if not-then controlled ambient)	23 \pm 5°C/73 \pm 9°F and 20 percent to 70 percent RH	
		Controlled Ambient	23 \pm 2°C/73 \pm 4°F and 45 percent to 55 percent RH	
3	Test condition	Test setup cable routing	Bend diameters \geq min long term bend diameter	
			Sharp twists and bends avoided	
			Avoid protrusions/other obstacles	
4	Environmental Chamber charts	Temperature & altitude profiles recorded	Chart, stored data on disk, other approved means	
			Includes chamber model and serial, date of test	
	Test equipment	Pertains to items 5 to 6		
5	Environmental chamber	Temperature rate of change	Meets 10°C/min minimum, both heating and cooling	
		Altitude rate of change	Meets 760 to 33 Torr in 5 minutes minimum	
		Programmable to perform cycles show in table 1	1,000 cycles at 166 minutes/cycle	
6	Optical measurements	Change in optical transmittance	Compliance with measurement 2101	
		Insertion loss	Compliance with measurement 2102	
		Optical signal discontinuity	Compliance with measurement 2104	
7	Sample size	Determined by statistical analysis and reliability	Sample size shown to be sufficient by Chi-square, student-t, normal distribution or other statistical/reliability means.	
8	Examinations	Visual inspection	No leakage, loss of sealing capacity, damage detrimental to operation.	
		Ferrule end face contamination	FOVIS inspected and cleaned. Table provided summarizing cleaning steps, cleaning device, cycle used, and result.	
		Ferrule end face geometry	Compliance with measurement 5201	

MEASUREMENT 5101

MIL-STD-1678-5

APPENDIX A

TABLE 5101 A-I. Minimum essential checklist for temperature-altitude measurements - Continued.

Item	Category	Description	Requirement	Compliance
9	Test Setup	Optical fiber connections	Routed outside chamber or to an optical interface port at chamber wall	
		Test fixture, if used	Minimize mass	
			Approved by Government tech authority	
			No other mass inside chamber	
Items to minimize variation in test	Secure/tie down cables (no move at instrument ports)			
10	Test	Test processes	Compliance with Measurement 5101	
		Maintain setup during test (source end)	No disconnection allowed until after testing completed (see measurements 2101, 2102, 2104)	
		Temperature-altitude cycle	Graph or electronic means to verify cycles per table 5101-I are obtained	
		Alteration in temperature cycle limits, if altered	Same ramp rates occur	
Same temperature soak times maintained				
11	Calculation	Electronically calculated	Verify proper equation in program	
		Operator performed calculations	Verify correct method used and calculated properly	
12	Data Sheet	Approved data sheet	Compliance with Measurement 2201	
		Added data sheet requirement	Chamber heating and cooling rates	
			Chamber atmosphere to altitude ramp rates	
Temperature & altitude instrumentation	Equipment information and calibration data			
13	Pass/fail criteria	Proper criteria specified	Conforms with SPEC/contract parameters and values	
		Proper criteria implemented	Test operators knows if fail and to verify result	

A.3 NOTES.

A.3.1 Intended use.

A.3.1.1 Audit team. This checklist is intended to assist Government auditors or their representatives during inspections of the optical measurement system. This checklist may be augmented at the auditor's discretion; however, it is not to be reduced.

A.3.1.2 Test laboratories. When test laboratories prepare to perform optical measurements or audits, this checklist should be used to supplement Measurement 5101, not replace it.

MIL-STD-1678-5

MEASUREMENT 5102

ACCELERATED STRESS (VIBRATION WITH TEMPERATURE STIMULI)

1. Purpose. This multiple parameter measurement is performed when there is the requirement during the design phase to identify design weaknesses in the FOCT (fiber optic cable topology) component or device under test (DUT). This multiple parameter test is not intended for use as part of qualification testing. Measurement 5102 is intended to standardize on the multiple parameter testing when the two test parameters or stimuli are multiple axes vibration and temperature cycling as part of prototype or developmental test effort. The applicable commercial test standards cited are for vibration (TIA/EIA-455-11) and temperature cycling (TIA-455-3) with imposing further refinements or boundaries (constraints) as tailored below. To minimize test variations and to permit more accurate comparison of test results from multiple sources, a "standardized" approach to induce the stimuli is specified for stressing the DUT.

2. APPLICABLE DOCUMENTS. See [appendix A](#) and [appendix B](#).

3. DEFINITIONS.

3.1 Accelerated stress test. Testing performed in which higher levels of stimuli (such as single axis vibration, multiple axes vibration, constant temperature, temperature cycling, humidity, and altitude) than seen in the actual operating environment are applied to stress a DUT over a shortened time. This application of the stimuli is made with the assumption that the DUT will produce the same weaknesses (such as failure mechanisms) as would occur when the same stimuli profiles are applied at lower levels over a longer timeframe.

3.2 HALT (Highly Accelerated Life Test). Stimuli expected to most weaken or induce failure mechanisms in the DUT are applied at higher levels over a shorter duration than seen in the DUT operating environment. The intent of performing a HALT is to find DUT weaknesses in the design stage of the product. The key point is that HALT is performed during the design stage, not for product screening or qualification. When the step stress tests to determine the limits for applied stimuli are grouped with the accelerated stress test (as done in Measurement 5102), this grouping (or combination testing) may be considered a HALT.

3.3 Operational limit (operating limit) for an applied stimulus. The highest stimulus level at which a DUT shows no degradation in operation. This stimulus level is found by increasing the level of the stimulus until degradation in DUT operation is obtained, then decreasing this stimulus level to the previous working level. If the DUT returns to operation after a decrease to the previous stimulus level, then this previous working level is specified as the operational vibration limit. If degraded operation is obtained at the previous vibration stimulus level, then the failure mode must be determined and corrective action take place before further testing to determine the limit.

3.4 Operational limit (operating limit) for multiple applied stimuli. The last stimuli levels at which a DUT shows no degradation in operation. Applied stimuli for temperature are at the determined upper temperature limit and lower temperature limit. The vibration stimulus is increased until degradation in DUT operation is obtained. Next, this vibration stimulus level is decreased to previous working level. If the DUT returns to operation after a decrease to the previous vibration stimulus level, then this previous working level is specified as the operational vibration limit. If degraded operation is obtained at the previous vibration stimulus level, then the failure mode must be determined and corrective action take place before further testing to determine the limit.

3.5 Specification limit. Limit defined in the contract requirements or the military specification.

3.6 Temperature test. Testing performed to determine the capability of an operational DUT when stimulating the added thermal stress of temperature in a vibration environment.

3.7 Vibration test. Testing performed to determine the integrity (such as structural or sealing) and operational capability when simulating vibrations that may be encountered with sinusoidal and random vibration profiles. Alternately, testing performed to determine the integrity (structural or sealing) and operational capability when stimulating vibrations at a specified Grms level with an uncontrolled vibration envelop (spectrum) in multiple axes using a repetitive shock impacts.

MEASUREMENT 5102

MIL-STD-1678-5

4. Test setup.

4.1 DUT configuration. The test samples and cable assemblies shall be prepared as specified in the military specification or applicable contractual document. If a housing is included as part of the DUT, holes shall be made to maximize air flow and heat transfer.

4.2 DUT optical measurements. DUT cabling connections shall be connected to the optical measurement instrumentation and measurements performed in accordance with Measurement 2102 (for Change in Optical Transmittance) and Measurement 2104 (for Optical Signal Discontinuity) in MIL-STD-1678 part 2.

4.2.1 Optical signal discontinuity. Monitor a minimum of four channels per DUT for optical signal discontinuity during the test.

4.2.2 Change in optical transmittance. Monitor all DUT channels for change in optical transmittance before and after each test condition.

4.3 Instrumentation used. Refer to Measurement 1202 (for change in optical transmittance) and Measurement 1024 (for optical signal discontinuity) in MIL-STD-1678 part 2.

4.3.1 Vibration isolation for optical measurement instrumentation. Ensure that optical equipment is isolated from vibration. Surface vibration transmitted from the test apparatus can adversely affect instrumentation and connections at the optical ports. One method for isolation is to place optical instrumentation on foam pads or other type of resilient surface.

4.4 Test fixture and other non-DUT masses inside the chamber.

4.4.1 Test fixture mass. If used, test fixture must be of minimum mass and approved by the Government technical authority.

4.4.2 Non-DUT masses. Minimum other mass (item that causes significant thermal lag) shall be added inside the chamber.

4.5 Methods to employ during vibration setup for connectors.

4.5.1 Test fixture integrity. The test fixture must be tested prior to fiber optic component qualification to verify no resonance occurs within the frequency range being tested.

4.5.2 Location of cable supports. The first set of cable supports after exiting the connector shall be located a minimum of 20.23 cm (8 inches) from the back end (tip) of a connector strain relief. A set implies cable supports at each end of a connector mated pair.

4.5.3 Tension in cables exiting the connector. Portion of cabling exiting the connector and secured to the cable support is to be kept straight (parallel to the axial, versus radial, direction of the connector) but allow up to 3.81 cm (1.5 inch) deflection or movement (deflect cable 3.81 cm (1.5 inch) from horizontal or straight run).

4.5.4 Isolated cable supports. The first set of cable supports after exiting the connector shall be isolated from (not affixed to or supported by) the vibration table.

MEASUREMENT 5102

MIL-STD-1678-5

4.5.5 External cable support structure. For large vibration machines where the table length exceeds the location where the first cable supports, an external cable support structure may be constructed. In one configuration, the first cable support may be affixed to the external cable support structure and suspended from above the vibration table. The external cable support structure must be isolated from the vibration table (machine).

4.5.6 Securing cable from DUT to cable supports. Cable that is exiting the connector is as straight as feasible before placement onto the cable support. Cable may be secured to the cable support by means of tie wraps. Tie wraps are to be snug so that movement of the cable is restricted, but tie wrap exerts minimum pressure on the cables. If alternate means to secure the cables are used, this same restricted movement with minimum pressure on the cables is to be observed. For most applications, 101 mm (4-inch) long tie wraps may be used. SAE-AS33671 electrical tie down straps, adjustable, plastic, type I, class 1, miniature, 18 pound, minimum tensile strength (such as P/N MS3367-4-9, NSN 5975-00-727-5153 or P/N MS3367-4-0, NSN 5957-00-903-2284) or other equivalent commercial self-locking cable ties.

4.5.7 Maintain minimum bend diameter. No cable bend is to exceed (be smaller than) the long term, minimum bend diameter of cable either at or after the cable support.

4.6 Accelerometer setup.

4.6.1 Accelerometer orientation. Orient accelerometer along the 3 principal axes of the DUT. The accelerometer shall be rigidly secured and located on the test fixture foundation as near as possible to the DUT, but not on the DUT itself.

4.6.2 Accelerometer mounting. Stud mounting accelerometer to supplemental fixture is preferred mounting method. Mount accelerometer to fixture using supplied mounting studs or supplied screws (such as Allen head cap screws). When used, tighten Allen head cap screws to torque specified on the accelerometer parameter sheet.

4.6.3 Cleaning microdot connector signal pins. Clean microdot connector signal pins using isopropyl alcohol. Connect one end to the appropriate accelerometer for axis under test. Connect the remaining end to the charge amp input.

4.6.4 Data acquisition connection. Connect the accelerometer amplifier BNC output to the data acquisition interface box using suitable BNC-BNC cable. Connect to appropriate data acquisition channel.

4.6.5 Amplifier setup. Set the amplifier sensitivity and set amplifier settings to provide a recording capability at 80 percent of the data acquisition card range.

- a. Set the lower frequency limit at 2 Hz or as applicable.
- b. Set the upper frequency limit at 1 kHz or as applicable.
- c. Move power switch to "On".
- d. Verify that batteries, if used, are charged. Replace or recharge batteries as required.

4.6.6 Accelerometer parameters. The accelerometer shall be calibrated to at least ± 5 percent over the frequency range of 5 to 2000 Hz. The amplitude of the accelerometer shall be calibrated to at least ± 5 percent over the frequency range of 5 to 2000 Hz. The accelerometer selected for a vibration sensor should have a fundamental resonant frequency that is not less than 10,000 Hz.

4.6.7 Data acquisition setup for accelerometer. Ensure acceptable optical signal trace by verifying that no saturation of the optical trace has occurred. Flat horizontal lines in the signal trace close to the baseline (0 dB) or close to optical signal peaks is an indication of amplifier saturation. For example, using a -10 volt to +10 volt signal, a data acquisition board would clip (become saturated) at ± 10 volts. A flat line signal is a voltage level greater than +10 volts or less than -10 volts and is beyond the capability of the data acquisition system to measure it.

MEASUREMENT 5102

MIL-STD-1678-5

4.7 Torque. For multiple termini connectors with coupling rings, apply specified torque and mark position as indicated below.

4.7.1 Applying torque. Prior to testing, initial mate and apply specified torque value.

4.7.2 Marking coupling ring position. Mark position after torque applied and check/record position after each axis. The performance of the connector assembly is based upon the dimensions that exist with the connector tightened properly and the mating components completely seated. This is especially true in connectors that use spring loaded inserts and elastic environmental seals/gaskets that must be properly preloaded/pre-stressed to function according to design parameters. Either the tightening torque should be specified, a final dimension or check mark established, or the connector tightened until no free play exists between the receptacle and the plug portion. Since the condition of "no free play" is somewhat indefinable and usually no marks are provided, the tightening torque specified for the connector must be used. The marking is also critical in determining if the change in measured performance is caused by the connector becoming loose. Vibration is a mechanical test and the energy imparted should not create any movement any of the connector components, which could degrade the optical performance of the assembly (including loosening). Usually, accelerometers or other instrumentation is used to determine the response of items under test. However, due to the size and shape of connectors this is difficult to accomplish. Visual observation of alignment marks is an easy and efficient method to determine if the impact is causing an undesirable condition. Consideration should be given to identifying/specifying the amount of looseness that is acceptable. Ideally there should be no loosening whatsoever.

4.7.3 Connectors with ratchet mechanism. For a mating connector containing a coupling ring ratchet mechanism or where specified for a particular connector type, do not tighten during testing.

4.8 Controller temperature sensor.

4.8.1 Temperature parameters. Accuracy of the temperature sensor shall be at least $\pm 1^\circ\text{C}$. Response time shall be no greater than 5 seconds from 0°C to 100°C .

4.8.2 Measurement point. The temperature sensor used in the control of the environmental chamber (cabinet) temperature shall be located as close to the DUT as feasible.

4.8.3 Temperature offset parameter. An offset parameter may be used to compensate for measuring the temperature within the DUT versus the air within the environmental chamber. For instance, to achieve an 85°C temperature within a particular DUT at a specified ramp rate, the temperature offset was determined to be 115°C (a 30°C offset). When a temperature offset is used, this offset shall not cause the DUT to be exposed above any material limit that comprises the DUT.

4.9 Temperature chamber temperature. Test charts are required for tests performed in environmental chambers and contain recordings of the environmental conditions (such as temperature and vibration) inside the chamber. The test chart is to include the environmental chamber manufacturer, model, and serial number with the date of the recording. In lieu of test charts, objective evidence that test requirements were achieved whether it be circular chart, stored data on disk or by other means approved by the applicable Government activity. Any stored data must be retained and made available at Government request.

5 Test procedure.

5.1 Determine limits for applied stimuli. When limits for the applied stimuli are not specified, these limits shall be determined in accordance with 5.1.1 through 5.1.4. Applicable limits used shall comply with 3.3 and 3.4.

5.1.1 Low temperature limit. A step stress test shall be performed to determine the operational limit for the applied stimulus of low temperature. Starting at an "ambient" temperature of $20^\circ\text{C} \pm 2^\circ\text{C}$, the temperature (stimulus) shall be decreased in steps of $10^\circ\text{C} \pm 2^\circ\text{C}$ until the limit for an applied stimulus is found (see 3.3). The soak time at each temperature step shall be a minimum of 5 minutes once the target temperature is obtained. The soak time may be increased when a longer duration is needed to obtain measurements. The low temperature shall not be reduced below any material limit that compromises the DUT.

MEASUREMENT 5102

MIL-STD-1678-5

5.1.2 High temperature limit. A step stress test shall be performed to determine the operational limit for the applied stimulus of high temperature. Starting at an “ambient” temperature of $20^{\circ}\text{C} \pm 2^{\circ}\text{C}$, the temperature (stimulus) shall be increased in steps of $10^{\circ}\text{C} \pm 2^{\circ}\text{C}$ until the limit for an applied stimulus is found (see 3.3). The soak time at each temperature step shall be a minimum of 5 minutes once the target temperature is obtained. The soak time may be increased when a longer duration is needed to obtain measurements. The high temperature shall not be raised above any material limit that compromises the DUT.

5.1.3 Temperature stress test. The low temperature and high temperature limits shall be the limits determined in 5.1.1 and 5.1.2. The test shall consist of 5 cycles at each ramp rate until the applied stimulus for the ramp rate limit is found (see 3.3). Each cycle shall consist of a ramp to and hold (such as soak time) at one temperature limit, followed by a ramp to and hold at the other temperature limit, then return. Ramp at the maximum rate that the chamber can perform.

5.1.4 Vibration limit. Perform either 5.1.4.1 (optional) or 5.1.4.2 (optional), then 5.1.4.3.

5.1.4.1 Exploratory vibration (optional test). Purpose is to identify frequencies at which resonance occurs to test at these frequencies in the endurance test. No damage is expected. Perform a quick-look preliminary sweep to identify critical frequencies. Corrective measures or specific instrumentation can be implemented before proceeding to 5.1.4.3. The exploratory vibration shall be performed in accordance with [appendix A](#).

5.1.4.2 Single axis vibration. Purpose is to perform a repeatable test that can accurately reproduce a vibration profile. Corrective measures or specific instrumentation can be implemented before proceeding to 5.1.4.3. The single axis vibration shall be performed in accordance with [appendix B](#).

5.1.4.3 Multiple axes vibration. Purpose is to induce vibration in multiple axes at the same time while controlling (limiting) the acceleration (Grms) in one particular axis. The multiple axes vibration shall be performed in accordance with [appendix C](#).

5.2 Accelerated stress test. Perform accelerated stress test using multiple axes vibration. Purpose is to induce the DUT with multiple stimuli (in this test the stimuli are vibration in multiple axes with temperature cycling). The accelerated stress test shall be performed in accordance with [appendix D](#).

5.3 Data sheet. In addition to the items for the standard data sheet specified in MIL-STD-1678 part 2 Measurement 2201, the data sheet shall list the items in 5.3.1 through 5.3.4.

5.3.1 Type of vibration machine.

5.3.2 Type of mounting fixture. Mounting fixture includes not only means to secure the DUT to the vibration table but also any supplemental mounting plates used to secure the DUT to the test fixture, and mounting plates used to secure the test fixture to the vibration machine.

5.3.3 Axis/direction. Axis/direction for the maximum applied Grms if not in the vertical axis.

5.4 Safety. Safety items include, but are not limited to, those listed in 5.4.1 through 5.4.3.

5.4.1 Sign. Post sign stating “VIBRATION TEST IN PROGRESS” where appropriate.

5.4.2 Ear protection. Verify all personnel in the facility are wearing their ear protection in a proper manner as required.

5.4.3 Setup Inspection. Inspect setup to ensure that torque on applicable bolts is to proper values and mechanical components are locked/in proper position prior to performing the test.

5.5 Relevant failures. A listing of relevant failures for the DUT is provided in [appendix E](#).

5.6 Compliance verification. The checklist in [appendix F](#) is provided to ensure compliance for inspection purposes.

MEASUREMENT 5102

MIL-STD-1678-5

6 NOTES.

6.1 Intended use, developmental testing during design phase. This test is to be used for developmental test and evaluation purposes only. Testing of a new design in development or performed as part of an evaluation is meant to discover design defects. Multiple parameter testing (such as parameters of temperature and vibration) may uncover flaws more readily than single parameter testing; however, the parameter most critical to the failure is not identified. Also, multiple parameter testing may induce combined stresses or a degree of combined stresses not found in-service. The purpose of the accelerated stress testing is to determine the weak links and make the design as robust as feasible within cost and other constraints. These features are then incorporated into the applicable military specifications allowing single parameter testing for qualification to show compliance with specification requirements.

MIL-STD-1678-5

MEASUREMENT 5102

APPENDIX A

PROCESS FOR EXPLORATORY VIBRATION.

A.1 Purpose. This appendix supplements 5.1.4.1 of Measurement 5102 by providing the process to perform the exploratory vibration.

A.2. APPLICABLE DOCUMENTS

A.2.1 General. The documents listed in this section are specified in section A.3 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections A.3 of this specification, whether or not they are listed.

A.2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA/EIA-455-11 - Vibration Test Procedure for Fiber Optic Components and Cables.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

A.2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

A.3 Sine (swept sine) vibration. Sine (swept sine) vibration in accordance TIA/EIA-455-11, test condition III tailored using the vibration input (amplitude) versus frequency range in table 5102 A-I and modified durations specified herein. Vibration shall be performed at ambient temperature only. This cycle shall be performed 12 times in each of three mutually perpendicular directions at ambient temperature. This results in a total of 36 cycles being applied for approximately 12 hours. The sequence shall be repeated twice (36 hours total at ambient temperature). Interruptions are permitted provided the requirements for rate of change and test duration are met. Completion of cycling within any separate band is permissible before proceeding to the next band.

TABLE 5102 A-I. Sine vibration parameter inputs.

Frequency range	Vibration Input
10 – 50 Hz	254 mm/sec
50 – 140 Hz	1.5 mm double amplitude
140 – 2000 Hz	60 G

MIL-STD-1678-5

MEASUREMENT 5102

APPENDIX B

PROCESS FOR SINGLE AXIS VIBRATION.

B.1 Purpose. This appendix supplements 5.1.4.2 of Measurement 5102 by providing the process to perform the single axis vibration.

B.2. APPLICABLE DOCUMENTS

B.2.1 General. The documents listed in this section are specified in sections B.3 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections B.3 of this specification, whether or not they are listed.

B.2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA/EIA-455-11 - Vibration Test Procedure for Fiber Optic Components and Cables.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

B.2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

B.3 Random vibration. Random vibration shall be performed in accordance with TIA/EIA-455-11, test condition VII - letter J. Duration shall be 8 hours in the longitudinal direction (orientation parallel to the optical fiber length and designated at the z axis) and 8 hours in the radial or transverse direction (orientation parallel to the optical fiber end cross section and in the x-y plane) for a total of 16 hours. For a DUT that is not symmetrical in two axes, testing shall be performed in the third orthogonal axis. Vibration test shall be done at the low temperature limit in accordance with 5.1.1. Vibration test shall be repeated at the high temperature limit in accordance with 5.1.2. Calculated overall Grms value from vibration machine controller shall be provided for the test at each temperature. This test shall then be repeated, except instead of using "Letter J", testing shall be done at 1.1, 1.3, and 1.5 times the specified power spectrum density.

MEASUREMENT 5102

MIL-STD-1678-5

MEASUREMENT 5102

APPENDIX C

PROCESS FOR MULTIPLE AXES VIBRATION.

C.1 Purpose. This appendix supplements 5.1.4.3 of Measurement 5102 by providing the process to perform the multiple axes vibration.

C.2 Step stress test. A step stress test shall be performed to determine the limit for the applied stimulus for vibration. Starting at an applied acceleration of 5 Grms, the vibration (stimulus) shall be increased in steps of 5 Grms until the limit for an applied stimulus is found (see 3.3). The hold time at each vibration step shall be a minimum of 10 minutes. The hold time may be increased when a longer duration is needed to obtain measurements. Vibration shall be induced by repetitive shock impacts (such as by striking the vibration table with pneumatic impact hammers). The vertical axis (the axis towards and away from the center of the earth) shall be used as the control axis and the axis in which the maximum acceleration occurs.

MEASUREMENT 5102

MIL-STD-1678-5

MEASUREMENT 5102

APPENDIX D

PROCESS FOR ACCELERATED STRESS TEST WITH MULTIPLE AXES VIBRATION.

D.1 Purpose. This appendix supplements 5.2 of Measurement 5102 by providing the process to perform the multiple axes vibration.

D.2 Accelerated stress test. An accelerated stress test shall be performed to determine the operating limit for the applied stimulus for multiple axes vibration and temperature cycling. Vibration cycling and temperature cycling shall be conducted simultaneously.

D.2.1 Vibration. Start at one-fifth the maximum Grms level (determined in 5.1.4.3) and go through one full temperature cycle. Increase the Grms level by another one-fifth the maximum Grms level and perform another full temperature cycle. Repeat this sequence until the maximum Grms level is obtained or until a fault (failure) is induced. Vibration shall be induced by repetitive shock impacts (such as by striking the vibration table with pneumatic impact hammers). The vertical axis (the axis towards and away from the center of the earth) shall be used as the control axis and the axis in which the maximum acceleration occurs.

D.2.2 Temperature. Temperature cycle shall be performed as specified in 5.1.3.

MIL-STD-1678-5

MEASUREMENT 5102

APPENDIX E

DUT RELEVANT FAILURES FOR ACCELERATED STRESS TEST

E.1 Purpose. This appendix provides the definition of relevant failures for the DUT.

E.2 Operation parameters.

E.2.1 Mechanical deterioration. Inability to mechanically uncouple. For instance, the inability of a connector plug and receptacle to properly mate and un-mate during or after the completion of the test shall be cause for failure of the DUT.

E.2.2 Physical deterioration. Evidence of any of the following defects after the test shall be cause for failure of the DUT:

- a. Broken or excessively worn engaging hardware.
- b. Uneven wear or galling of hardware, guide pins, or mating surfaces.
- c. Excessive debris from worn surfaces.
- d. Damage or wear to seals, if applicable.
- e. Displaced, bent, broken, or chipped parts.
- f. Scratching of the interface area.
- g. Leaking or filling of potting compounds.
- h. Relative motion between cable and connector/splice parts.
- i. Physical distortion/wear resulting in fatigue or failure.
- j. Separation of bonded surfaces.
- k. Connectors shall not exhibit loosening of parts for the range of frequencies tested (unless otherwise specified).

NOTE: Unless damage causes unacceptable impairment of equipment performance, results in a hazard, or results in substantially shortened equipment useful life, minor physical damage to the tested item, such as small cracks, minor yielding of structure, out-of tolerance clearances, and similar damage may not be cause for test disapproval if such damage is accepted by the technical agent for the Government acquisition authority.

E.2.3 Optical performance.

- a. Maximum allowed change (discontinuity) in optical signal amplitude during vibration (in dB).
- b. Maximum allowed duration of optical signal discontinuity for multimode DUT/channels.
- c. Maximum allowed duration of optical signal discontinuity for single mode DUT/channels.
- d. Maximum allowed change in optical transmittance after each test condition (in dB).

MEASUREMENT 5102

MIL-STD-1678-5

APPENDIX E

E.2.4 End face geometry. When test samples are comprised of connectors or termini, the ferrule end face of each connector/termini mated pair shall be inspected for end face geometry. Inspection for end face geometry shall be performed before the test sequence and after the conclusion of the test sequence. Ferrule end face geometry shall be inspected as specified in Measurement 5201.

E.2.5 Contamination. When test samples are comprised of connectors or termini, the ferrule end face of each connector/termini mated pair shall be inspected for cleanliness after the completion of the test or during specified points during and after the completion of the test, as specified. Inspection shall be performed using a Fiber Optic Video Inspection System (FOVIS). As an option, each end face shall be captured using software provided with the FOVIS. For each cleaning operation performed, a table is requested to summarize the number of cleaning steps, cleaning device, cycle used, and result.

E.2.6 Non-relevant failures. Examples of non-relevant failures include, but are not limited to, damage caused by maintenance error or operating error, secondary failures caused by test equipment, and failures due to improper installation or setup.

MIL-STD-1678-5

MEASUREMENT 5102

APPENDIX F

MINIMUM ESSENTIAL CHECKLIST FOR ACCELERATED STRESS MEASUREMENTS
(MULTIPLE AXES VIBRATION WITH TEMPERATURE CYCLING)

F.1. Purpose. This appendix addresses a checklist of the minimum essentials for the temperature-altitude measurement.

F.2. Usage. Table 5102 F-I is the checklist of minimum essentials for Government auditors, or their representatives, use during inspections. This checklist should be expanded at the auditor's discretion.

TABLE 5102 F-I. Minimum essential checklist for accelerated stress measurements.

Item	Category	Description	Requirement	Compliance
1	Test sample configuration	Cable assembly length:	10 meters minimum (13 m to do 3 cut-backs)	
		Connectors and splices	Complies with Part 4 of this standard practice	
2	Room ambient Environmental condition	Standard Ambient (if test equipment built to operate in this range, if not-then controlled ambient)	23°C ± 5°C/73°F ± 9°F and 20 percent to 70 percent RH	
		Controlled ambient	23°C ± 2°C/73°F ± 4°F and 45 percent to 55 percent RH	
3	Test condition	Test setup cable routing	Bend diameters ≥ min long term bend dia	
			Sharp twists & bends avoided	
			Avoid protrusions/other obstacles	
4	Environmental chamber charts	Temperature profiles and vibration responses recorded	Chart, stored data on disk, other approved means	
			Includes chamber model & serial, date of test	
	Test equipment	Pertains to items 5 to 6		
5	Environmental chamber	Programmable to perform specified temperature steps and cycles and vibration steps	Temperature steps: 10°C step increases and decreases	
			Temperature cycles: ramp done at maximum rate for chamber to max and min op temperature limits	
			Vibration only steps: 5 Grms step increases	
			Vibration with temp cycling steps: 1/5 max Grms step increases with full temp cycle at each vibration step	
6	Optical measurements	Change in optical transmittance	Compliance with measurement 2101	
		Optical signal discontinuity	Compliance with measurement 2104	
7	Sample size	Determined by statistical analysis and reliability	Sample size shown to be sufficient by Chi-square, student-t, normal distribution or other statistical/reliability means	

MEASUREMENT 5102

MIL-STD-1678-5

APPENDIX F

TABLE 5102 F-I. Minimum essential checklist for accelerated stress measurements - Continued.

Item	Category	Description	Requirement	Compliance
8	Examinations	Visual inspection	No leakage, loss of sealing capacity, damage detrimental to operation, etc. (see appendix E)	
		Ferrule end face contamination	FOVIS inspected & cleaned. Table provided summarizing cleaning steps, cleaning device, cycle used, & result. (see appendix E)	
		Ferrule end face geometry	Compliance with measurement 5201	
9	Test setup	Optical fiber connections	Routed outside chamber or to an optical interface port at chamber wall	
		Test fixture, if used	Minimize mass	
			Approved by Government tech authority	
			No other mass inside chamber	
		Cable supports	First set exiting DUT 20.32 cm (8 inch) min distance, 1.27 cm (.5 inch) max deflection	
		Items to minimize variation in test	Secure/tie down cables (no move at instr. ports)	
		Vibration measurement: accelerometer parameters	Amplitude: $\pm 5\%$ from 5-2000 Hz fund resonant freq: ≥ 10 kHz Placement: vertical axis, near DUT, secure rigidly	
Temperature measurement: Sensor parameters	Accuracy: $\pm 1^\circ\text{C}$ Response time: ≤ 5 sec at 0°C - 100°C			
Temperature measurement: Sensor location	Within DUT, close to center. Not measure chamber air temp			
10	Test	Test processes	Compliance with Measurement 5102	
		Maintain setup during test (source end)	No disconnection allowed until after testing completed (see measurements 2102 and 2104)	
		Limits for applied stimuli part determined (if not specified as part of spec/contract)	Low temp limit: step stress	
			High temp limit: step stress	
			Temp stress test: temp cycling	
			Vibration resonance search: single axis vibration	(optional)
Vibration only limit: multiple axes vibration				
Accelerated stress test: multiple axes vibration with temperature cycling				
11	Calculation	Electronically calculated	Verify proper equation in program	
		Operator performed calculations	Verify correct method used and calculated properly	

MEASUREMENT 5102

MIL-STD-1678-5

APPENDIX F

TABLE 5102 F-I. Minimum essential checklist for accelerated stress measurements - Continued.

Item	Category	Description	Requirement	Compliance
12	Data sheet	Approved data sheet	Compliance with Measurement 2201	
		Added data sheet requirement	Type of vibration machine	
			Type of mounting fixtures	
			Axis for max applied Grms	
Temperature & vibration instrumentation	Equipment information and calibration data			
13	Pass/fail criteria	Proper criteria specified	Conforms with SPEC/contract parameters & values	
		Proper criteria implemented	Test operators knows if fail & to verify result	

F.3. NOTES.

F.3.1. Intended use.

F.3.1.1 Audit team. This checklist is intended to assist Government auditors or their representatives during inspections of the optical measurement system. This checklist may be augmented at the auditor's discretion; however, it is not to be reduced.

F.3.1.2 Test laboratories. When test laboratories prepare to perform optical measurements or audits, this checklist should be used to supplement Measurement 5102, not replace it.

MIL-STD-1678-5

GENERAL LEGACY MEASUREMENTS

5201 - 5203

MIL-STD-1678-5

MEASUREMENT 5201

END FACE GEOMETRY INSPECTION

1. Purpose. This measurement is performed when there is the requirement to inspect the FOCT (fiber optic cable topology) component or device under test (DUT) for compliance to the connector/terminus ferrule end face geometry. Measurement method addressed is one using an interferometer. This measurement is intended to be used as part of qualification testing in addition to developmental, prototype, production, rework, and modification programs on military platform fiber optic cable assemblies. To ensure that the risk to the Government of accepting bad end face geometry measurement data is low, to minimize test variations, and to permit more accurate comparison of test results from multiple sources, a "standardized" approach is specified to perform this measurement. Setup parameters and measurement (acceptance) criteria for ferrule end face geometry are addressed for domed end face ferrules (configured with either a physical contact, PC, or a non-contact, NC, polish) and for flat end face ferrules (with a NC polish only).

2. APPLICABLE DOCUMENTS.

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2 Government documents.

2.2.1 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

International Electrotechnical Commission (IEC)

IEC 61300-3-23 - Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-23: Examination and Measurements: Fibre Position Relative to Ferrule Endface.

(Copies are available from [http://webstore.iec.ch/webstore/webstore.nsf/\\$\\$search?openform](http://webstore.iec.ch/webstore/webstore.nsf/$$search?openform) or ANSI Customers Service, 25 West 4th Street, 4th Floor, New York, NY 10036.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Definitions.

3.1. Domed ferrule. See end face, domed.

3.2. End face, domed. A ferrule in which the mating connection surface has a radius (or domed) shape (see figure 5201 A-1).

3.3. End face, ferrule. Ferrule surface contacting the mating ferrule and/or the mating fiber. Also, the surface that is perpendicular to the longitudinal axis of the optical fiber.

3.4 End face, flat. Ferrule surface contacting the mating ferrule and which the connection surface has essentially a planar (flat) shape with a very limited degree of tilt.

MEASUREMENT 5201

MIL-STD-1678-5

3.5. End face geometry. Measurement of the ferrule end face for radius of curvature, measurement of the fiber from a defined surface for fiber height, and measurement of the highest point on the surface contour from the center of the fiber for offset.

3.6. Fiber height, domed end face. The height of the fiber is compared to the region of the sphere over the fiber that is formed by an ideally polished connector end face. The difference is the fiber height. The fiber height is measured as the degree of fiber protrusion or undercut from this region of the sphere.

3.7. Fiber height, flat end face. The height of the fiber is compared to the planar surface determined from predetermined distances on the connector end face. The difference is the fiber height. The fiber height is measured as the degree of fiber protrusion or undercut from the planar surface.

3.8. Flat ferrule. See end face, flat.

3.9. NC polish. Ferrule end face is polished in a manner so that the ferrules are the first to make contact when connection surfaces are mated together without the fibers coming into contact.

3.10. Non-contact polish. See NC polish.

3.11. Offset. The polish offset is the distance between the highest point on the connector end face (where the center of the bull's eye pattern is observed) and the center of the fiber. This offset is also referred to as the linear offset, eccentricity, or apex offset.

3.12. Offset, angular. The angle formed between the following two lines. One line is a radial line from the center of the spherical surface to the high point of the polish. The other line is a line through the longitudinal axis in the center of the fiber.

3.13. PC polish. Ferrule end face is polished in a manner so that the fibers first make contact when connection surfaces are mated together.

3.14. Physical contact polish. See PC polish.

3.15. Radius of curvature, domed end face. An ideally polished connector end face should have the fiber and the connector form a uniform, spherical surface with the fiber at the highest point (apex). The radius of this sphere formed by the polished connector is called the radius of curvature.

4. Parameters. Setup parameter values and limits on measurement parameters (acceptance criteria), measurement instrumentation considerations and measurement parameter interpretations are provided for domed end face ferrules (configured with either a physical contact, PC, or a non-contact, NC, polish) and for flat end face ferrules (with a NC polish only).

4.1. End face geometry configurations. There are two types of end faces for the ferrule (either domed or flat) and two types of polishes (either physical contact, PC, or non-contact, NC) addressed. Possible configurations, for the ferrule and polish, end face geometry, are summarized in [table 5201-I](#). Measurement [5201](#) addresses the ferrules with three of the four end face configurations.

MIL-STD-1678-5

TABLE 5201-I. Possible configurations for end face geometry.

Ferrule end face	Polish	Notes
Domed	PC	<u>1/</u> , <u>2/</u>
Domed	NC	<u>1/</u> , <u>3/</u>
Flat	PC	<u>4/</u>
Flat	NC	<u>1/</u> , <u>5/</u>

- 1/ Configuration covered in Measurement [5201](#).
2/ Recommended for use in communications systems.
3/ Recommended for use with test jumpers (MQJ) only.
4/ Not addressed in Measurement [5201](#). End face geometry measurements are less meaningful for the configuration of a ferrule with a flat end face containing a PC polish. No meaningful parameter limits can be established to ensure that fiber-to-fiber contact will always be obtained.
5/ Addressed, but for legacy systems only.

4.2. Setup parameters. Setup parameters for curve fitting diameters, lighting source, and lighting level shall conform to [appendix A](#).

4.3. Measurement criteria. The three parameters measured for end face geometry are fiber height, radius of curvature and offset. There are different ways to determine the offset as detailed in [appendix B](#). Recommended measurement conditions used will differ depending on the end face geometry. Measurement criteria shall conform to [appendix B](#).

5. Implementation. This requirement directs all platforms utilizing fiber optics to adopt these endface geometry inspection requirements and to implement them in a timely and cost-effective manner. This includes obtaining cost estimates associated with the implementation on existing contracts.

5.1. Preferred end face geometry. Unless otherwise specified, the end face geometry shall conform to domed ferrules with a Physical Contact (PC) polish.

5.2. Endface geometry sampling. Inspection requirements for endface geometry utilizing an interferometer shall be 100 percent until statistical methods and process controls indicate that classical sampling methodology can be applied. Metrics shall be available to demonstrate a capable sustained process.

6. NOTES.

6.1 Lessons learned.

6.1.1 Costly not to inspect initially. Failure to inspect for end face geometry as part of the post fabrication/assembly inspections can be costly. It is more costly to remove cabling and/or equipment when determined after installation that improper end face geometry cause or one factor of problem under investigation.

6.2 Intended use. On these platforms, the fiber optic cable assemblies intended to be inspected include (1) cable harnesses, (2) equipment (electronic module/package) such as a WRA, LRM or LRU with internal fiber optics, (3) circuit card modules and assemblies with internal fiber optics, (4) fiber optic test jumpers, and (5) other miscellaneous cabling.

MEASUREMENT 5201

MIL-STD-1678-5

MEASUREMENT 5201

APPENDIX A

SETUP PARAMETERS FOR END FACE GEOMETRY MEASUREMENT

A.1 Purpose. This appendix provides the values for parameters required to setup the interferometer prior to obtaining measurements for the DUT ferrule end face geometry.

A.2. APPLICABLE DOCUMENTS.

A.2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

A.2.2 Government documents.

A.2.2.1 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

International Electrotechnical Commission (IEC)

IEC 61300-3-23 - Fibre optic interconnecting devices and passive components - Basic test and measurement procedures - Part 2-23: Examination and Measurements: Fibre Position Relative to Ferrule Endface.

(Copies are available from [http://webstore.iec.ch/webstore/webstore.nsf/\\$\\$search?openform](http://webstore.iec.ch/webstore/webstore.nsf/$$search?openform) or ANSI Customers Service, 25 West 4th Street, 4th Floor, New York, NY 10036.)

A.2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

A.3 Curve fitting parameters. Measurements shall be obtained with the interferometers setup using the curve fitting diameters specified in [table 5201 A-I](#). The curve fitting dimensions are those specified in A.3.1 through A.3.3.

A.3.1 Diameter F. The outside diameter of the Averaging Area, an area of a circle that is centered on the fiber surface. The center of the fiber is considered to be concentric with the center of the ferrule (see [figure 5201 A-1](#)).


A.3.2 Diameter E. The outside diameter of the Extracting Area, an area of a circle that includes the fiber end face and the adhesive region around the ferrule hole diameter.

A.3.3 Diameter D. The outer diameter of the Fitting Area, an area centered on the ferrule surface and defined by a donut shaped area with outer diameter D and inside diameter E. The outer diameter of the Fitting Area is also referred to as the Region of Interest Width.

MEASUREMENT 5201

MIL-STD-1678-5

APPENDIX A

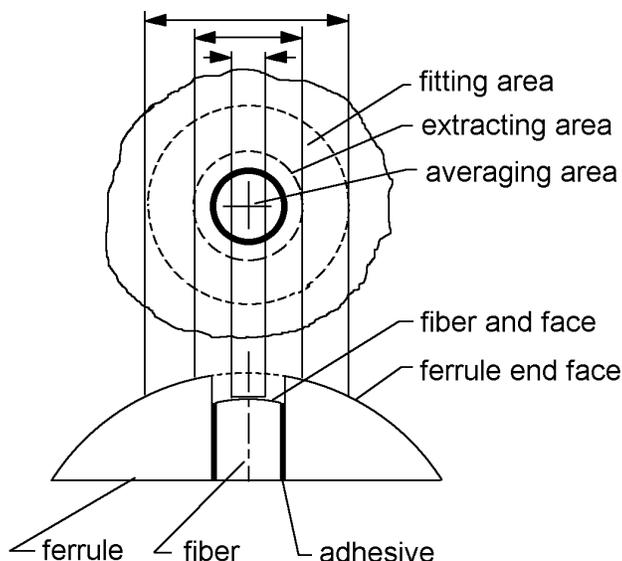FIGURE 5201 A-1. Curve fitting diameters.TABLE 5201 A-I. Standardized diameters for the curve fitting areas.

Diameter (microns)	Cladding		Polyimide coating
	125 <u>1/</u>	140	100/140/172
Diameter F – averaging area OD <u>2/</u>	50	50	50
Diameter E – extracting area OD <u>3/</u>	140	155	185
Diameter D – fitting area OD <u>4/</u>	250	270	300

- 1/ IEC 61300-3-23 lists the “suggested” diameters for D, E, and F for the 125 micron, nominal fiber diameter and an ROC of 8 mm to 25 mm. Other size fiber diameters D, E, and F are proportional based on these values as indicated in the following notes.
- 2/ Diameter F is not increased for larger fiber sizes since fiber height is calculated at the center of the fiber and is not the average height of the total fiber. A 50 micron diameter provides a more robust measurement for the center of the fiber (more pixels).
- 3/ Use an outer diameter that is 15 microns greater than the cladding diameter or coating diameter, as applicable.
- 4/ Use an outer diameter that is about 110 microns above the extraction diameter.

A.4 Interferometer light source selection. Measurements can be obtained using either a broad band or a narrow band measurement and the fiber height calculated based on the spherical surface or the planar surface. For the ferrule with an end face geometry addressed in Measurement 5201, the measurement conditions shall conform to A.4.1, A.4.2, and table 5201 A-II.

MEASUREMENT 5201

MIL-STD-1678-5

APPENDIX A

A.4.1 Narrow band (monochromatic light). In general, use for connectors with a PC polish. Use where there will be less dispersion from the end face, such as with a "sharper" radius of curvature (smaller value). Monochromatic light (such as red light) provides a measurement with better resolution.

A.4.2 Broad band (white light). In general, use for connectors with a non-contact polish. Use to eliminate ambiguity for a configuration with a step height. White light provides a coarser measurement.

TABLE 5201 A-II. Measurement conditions for end face geometry addressed.

Configurations for end face geometry		Measurement conditions	
Ferrule end face	Polish	Measurement type	Calculated fiber height
Domed	PC	Narrow band	From spherical surface
Domed	NC	Broad band	From spherical surface
Flat	NC	Broad band	From planar surface

A.5 Surface reflectivity. Adjust lighting level (such as camera gain, image, and contrast) to prevent light saturation of the detector/camera.

A.5.1 Ceramic surface. Adjust for a lower reflectivity.

A.5.2 Metal ferrule with ceramic (jeweled) insert. Adjust for a lower reflectivity (similar reflectance level as for ceramic ferrule since region being detected is within the ceramic insert).

A.5.3 Metal ferrule. Adjust for a higher reflectivity.

MIL-STD-1678-5

MEASUREMENT 5201

APPENDIX B

MEASUREMENT CRITERIA FOR END FACE GEOMETRY MEASUREMENT

B.1 Purpose. This appendix provides the acceptance criteria for parameters generated by the interferometer software for calculated measurements of radius of curvature, apex offset, and fiber height for the DUT ferrule end face geometry.

B.2 Relationship of fiber height to surface of ferrule.

B.2.1 Spherical surface. Protrusion (spherical protrusion) is the positive distance above the spherical surface. Undercut (spherical undercut) is positive distance below the spherical surface. Only a partial region of the spherical surface is used for the fiber height measurement. This region is limited to the portion of the surface directly over the fiber.

B.2.2 Planar surface. The planar surface is to be determined from an ideal sphere after mapping the ferrule end face. From this best fit/ideal sphere, a plane shall be mapped using the points on the ideal sphere at diameter E, the outer diameter of the extraction area (see curve fitting areas for interferometer measurement calculations in [appendix A](#) of Measurement 5201).

B.3 Polarity (+ or -) for fiber height measurements. Interferometers traditionally provided the extended/protracted fiber measurement in terms of fiber height. With respect to the distance above the spherical surface, a particular interferometer may provide the fiber height as either a positive or negative value. Refer to the operating manual for the particular interferometer. Some recent interferometers provide the extended/protracted fiber measurement either in terms of protrusion or in terms of undercut.

B.3.1 Spherical surface, negative sign for concave. If the interferometer provides either a measurement of fiber height with a positive distance below the spherical surface or of undercut, use the applicable undercut value in the table as the upper/positive limit. Use the value for protrusion as the lower/negative limit (for example, a 0.05 micron protrusion, as the lower limit, would be specified as -0.05 microns).

B.3.2 Spherical surface, positive sign for convex (protrusion). If the interferometer provides either a measurement of fiber height with a positive distance above the spherical surface or of protrusion, use the applicable undercut value in the table as the lower/negative limit. Use the value for protrusion as the upper/positive limit (for example, a 0.05 micron protrusion, as the upper limit, would be specified as +0.05 microns).

B.3.3 Planar surface. Replace the words "spherical surface" with "planar surface" in B.3.1 and B.3.2 and the polarity for the fiber height applies to a measurement calculated based on a planar surface.

B.4 Radius of curvature (ROC). Acceptable limits for ROC shall conform to table 5201 B-I.

TABLE 5201 B-I. Acceptable limits for radius of curvature (ROC).

Surface	Acceptable ROC
Spherical	7 mm to 25 mm
Planar	≤ -80 mm and $\geq + 80$ mm ^{1/}

^{1/} Inspect to ensure consistency of a flat surface contour rather than specifying stringent pass/fail criteria. The criteria provided are to ensure there is not an overly concave or overly convex surface contour (not have a sharp/steep radius of curvature (ROC)).

MIL-STD-1678-5

APPENDIX B

B.4.1 General relationships of radius of curvature for planar surfaces.

B.4.1.1 Positive ROC. Positive radius of curvature is convex to a flat ferrule end face. A flat/gradual convex radius of curvature is considered to be from +80 to positive infinity.

B.4.1.2 Negative ROC. Negative radius of curvature is concave to a flat ferrule end face. A flat/gradual concave radius of curvature is considered to be from -80 to negative infinity.

B.4.2 Specific relationships of radius of curvature for planar surfaces.

B.4.2.1 Convex to concave. As the radius of curvature goes from a gradual convex contour to a gradual concave contour, the values go from +80 mm up to positive infinity, inverts from positive infinity to negative infinity, then goes down from negative infinity to -80 mm.

B.4.2.2 Close to flat surface. NOTE: The radius of curvature of a close to flat surface may change readily from one measurement to the next from a large positive value (such as +20,000 mm) to a large negative value (such as -20,000 mm).

B.5 Offset. Acceptable limits for offset shall conform to table 5201 B-II.TABLE 5201 B-II. Acceptable limits for offset.

Surface	Type offset	Acceptable offset
Spherical	Apex	≤ 50 microns
Planar	Angular	$\leq 0.5^\circ$ <u>1/</u>

1/ Inspect to ensure consistency of a near perpendicular surface rather than specifying stringent pass/fail criteria. The criteria provided are to ensure there is not an overly steep angle on the surface contour.

B.6 Fiber height. Acceptable limits for fiber height shall conform to table 5201 B-III.TABLE 5201 B-III. Acceptable limits for fiber height.

Surface	Acceptable protrusion	Acceptable undercut
Spherical	≤ 0.05 microns (≤ 50 nm)	See table 5201 B-IV
Planar <u>1/</u>	None	65 nm minimum 400 nm maximum

1/ Fiber height for a ferrule with a flat end face shall be measured from a planar surface as opposed to the apex of a spherical surface.

B.7 Fiber undercut. Acceptable limits for fiber undercut shall conform to [table 5201 B-IV](#).

MIL-STD-1678-5

APPENDIX B

TABLE 5201 B-IV. Acceptable limits for undercut.

End face	Domed 1/	Domed 2/,3/	Domed 2/,3/	Domed 2/,3/
Ferrule hole	N/A	125 μm	140 μm	172 μm
ROC (mm)	PC polish (nm)	PC polish (nm)	PC polish (nm)	PC polish (nm)
7	125	329	400	578
8	125	294	356	512
9	125	267	322	461
10	125	245	295	420
11	115	228	273	386
12	106	213	254	358
13	98	200	238	334
14	91	190	225	314
15	85	180	213	297
16	80	172	203	281
17	75	165	194	268
18	72	159	186	255
19	68	153	179	245
20	65	148	173	235
21	62	143	167	226
22	59	139	161	218
23	56	135	157	211
24	53	131	152	204
25	50	128	148	198

- 1/ Domed end face with PC polish. The maximum value (limit) for the spherical undercut is dependent upon the radius of curvature measured for the connector under test. Current commercial equation is as follows: $U = -0.02R^3 + 1.3R^2 - 31R + 325$, where U is the maximum acceptable undercut in nanometers and R is the radius of curvature in mm. This equation is used for a radius of curvature between 10 to 25 mm. A constant value for the maximum acceptable undercut of 125 nm is used with a radius of curvature between 7 to 10 nm. Table 5201 B-IV lists the maximum acceptable undercut for every mm of the radius of curvature (ROC).
- 2/ The minimum value (limit) for the spherical undercut for ferrules with a NC polish is dependent upon the radius of curvature measured and on the ferrule hole diameter for the connector/terminus under test. Table 5201 B-IV lists the maximum acceptable undercut for every mm of the radius of curvature (ROC).
- 3/ These minimum acceptable undercut values versus the radius of curvature for ferrules with a NC polish are based on a fiber height of 50 nm below the surface of the ferrule. Calculations for the tables are based on a geometric approach utilizing the Pythagorean theorem.

MIL-STD-1678-5

MEASUREMENT 5202

CHANGE IN OPTICAL TRANSMITTANCE LEGACY CRITERIA.

1. Purpose. The legacy criteria for the change in optical transmittance measurement is that criteria contained in the Optical test Measurement Guide that is not incorporated into Measurement 2101 in MIL-STD-1678 part 2. These legacy criteria are provided for historical purposes only. The implementation of a prescription approach nullified or invalidated the legacy criteria from being specified in Measurement 2102. There is no intention to incorporate the legacy criteria into a future revision of Measurement 2102.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2 Government documents.

2.2.1 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this standard practice to the extent specified herein. Unless otherwise specified, the issues are these documents are those cited in the solicitation or contract.

NSWCCD-SSSES ltr. 9504 Ser 963210/026 - Optical Test Measurement Guide, Test Suitability for Fiber Optic Cable Topology Components of 1 March 2005

(Copies of this document can be obtained at Web Site: <https://fiberoptics.nswc.navy.mil/> in the Policy and Guidance section under Testing Information.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

TELECOMMUNICATIONS INDUSTRY ASSOCIATION/ ELECTRONICS INDUSTRY ALLIANCE (TIA/EIA)

TIA-455-20	-	Measurement of Change in Optical Transmittance.
TIA/EIA-455-34	-	Interconnection Device Insertion Loss Test.
TIA-EIA-455-78	-	Optical Fibres Part 1-40 Measurements Methods and Test Procedures: Attenuation.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Definitions.

3.1 Baseline measurement. The measurement to obtain the optical power level (optical transmittance) that is taken before the start of the test.

3.2 Change in optical transmittance. The calculation of each test measurement relative to a baseline measurement.

3.3 Test measurement. The measurement to obtain the optical power level (optical transmittance) that is taken at a point during the test or at the conclusion of the test. In reference to the baseline measurement, this measurement may be referred to as a "subsequent" measurement.

MEASUREMENT 5202

MIL-STD-1678-5

4. Setup.4.1 Test jumpers.

4.1.1 Use at the launch end switch. Theoretically, a larger core fiber may be used at the launch end switch; however, difficulty in demonstrating adequate stability precludes its allowance.

4.1.2 Use at the detector end switch. Test jumper with a larger fiber size than the detector end switch may be used if it can be demonstrated that all light emitted from the fiber will be captured by the detector. To ensure all light emitted from the fiber is captured, a power meter with a wide area detector must be used.

4.2 Launch conditions. Historical background is provided on replaced standards for informational purposes only.

4.2.1 Multimode. The change in optical transmittance is to be performed using the specified restricted launch condition. For a restricted launch condition, a 70/70 launch condition or equivalent shall be used as defined in NSWCCD-SSES Itr. 9504 Ser 963210/026, Section XI. Note that an exception for the 100/140 micron fiber size is listed in NSWCCD-SSES Itr. 9504 Ser 963210/026, Section XI. The optical source used must provide an overfilled launch condition into the device used to restrict the launch condition. One exception is an optical source built to provide a particular restrictive launch.

NOTE: TIA-455-50, replaced by TIA-455-78, specified two methods to achieve restrictive launch. Method A specifies 5 turns around a smooth mandrel of different diameter for each core size (same as specified in TIA/EIA-455-34). Method B specified producing a 70/70 launch condition by the use of beam optics. See NSWCCD-SSES Itr. 9504 Ser 963210/026, Section XI to implement compliance for this launch condition.

4.2.2 Single mode. For components with single mode fiber, light launch conditions (mode conditioning for filtering out higher order modes), as listed in NSWCCD-SSES Itr. 9504 Ser 963210/026, Section XI shall be used.

NOTE: TIA-455-78 references EIA/TIA-455-77 (withdrawn 1/2003) for the higher order mode filter. Mandrel wrap mode filters include those that have a sufficient insertion loss (about 4 dB) or a determined cutoff wavelength. TIA-455-78 (IEC 60793-1-40) states the same two methods as TIA-455-50 for multimode, but is vague for single mode. An example of a higher order mode filter is given as a single loop of radius sufficiently small to shift cut-off wavelength below the minimum wavelength of interest. See NSWCCD-SSES Itr. 9504 Ser 963210/026, Section XI to implement compliance for the single mode launch condition.

4.3 Coupler (splitter).

4.3.1 Mode filtering. A coupler cannot be used as a mode filter. Specifically, a coupler must have the same core size as the fiber with the component being tested. For example to provide a restricted launch condition, a coupler with 50/125 micron fiber is not to be used when the fiber size for the component being tested (DUT) is 62.5/125 micron.

4.3.2 Modal dependence. A fused biconnec coupler is typically more mode sensitive than a substrate filter coupler.

4.3.3 Splitting or branching effect on launch condition. Couplers do not necessarily pass the launch condition through unchanged. Some legs may be more restrictive, one or more legs may be more fully filled (lower order modes may split down one or more legs whereas higher order modes down other legs).

4.3.4 Fiber size for acceptable usage. Use of a coupler with the same fiber size as the fiber for the component being tested is acceptable. This acceptance is contingent upon verification of acceptable launch conditions at the output legs of the coupler/acceptable launch conditioning after the coupler.

MIL-STD-1678-5

MEASUREMENT 5203

ATTENUATION RATE LEGACY CRITERIA.

1. **Purpose.** The legacy criteria for attenuation rate are that criteria contained in the Optical test Measurement Guide that is not incorporated into MIL-STD-1678 part 2 Measurement 2106. These legacy criteria are provided for historical purposes only. The replacement of different TIA standards invalidated the legacy criteria from being specified in Measurement 2106. There is no intention to incorporate the legacy criteria into a future revision of Measurement 2106.

2. APPLICABLE DOCUMENTS

2.1 **General.** The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2.1 **Non-Government publications.** The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

TELECOMMUNICATIONS INDUSTRY ASSOCIATION/ ELECTRONICS INDUSTRY ALLIANCE (TIA/EIA)

TIA/EIA-455-34	-	Interconnection Device Insertion Loss Test.
TIA-455-78	-	Optical Fibres: Part 1 - 40: Measurement Methods and Test Procedures: Attenuation.
TIA-455-133	-	Optical Fibres: Part 1-22: Measurement Methods and Test Procedures Length Measurement

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.3 **Order of precedence.** Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. **Definitions.**

3.1 **Attenuation.** In an optical fiber or fiber optic cable, the decrease in power of an optical signal measured from input to output, such as measured over the entire length of an optical fiber. The attenuation can be in absolute power units, a fraction of a reference value, or in decibels. Attenuation in a fiber occurs as a result of absorption, reflection, scattering, deflection, dispersion, or diffusion rather than as a result of geometric spreading.

3.2 **Attenuation rate.** Attenuation for an optical fiber or fiber optic cable is usually expressed as an attenuation rate, that is, in the units of decibels/kilometer (dB/km). The attenuation is the loss in the optical signal or power level that occurs per unit of distance along its length. In dB/km, the attenuation rate, α , is given by the relation:

$$\alpha = [10 \log_{10}(P_i/P_0)]/L$$

Where: L is a given length of the DUT in kilometers,
 P_i is the input power for the length L and
 P_0 is the output power for the length L.

In this form, the attenuation rate will be a positive value because P_i is the larger of the two powers.

MIL-STD-1678-5

4. Initial qualification test. Initial qualification: Measurement was performed to obtain the spectral attenuation. Legacy test method for performance of attenuation rate is listed in 6.1. The measurement was performed using a 30 mm mandrel for single mode and a 70/70 restricted launch condition for multimode fiber optic cable.

4.1. Multimode, initial qualification. Specific processes performed for legacy test methods are detailed in 6.1.1.

4.2. Single mode initial qualification. Specific processes performed for legacy test methods are detailed in 6.1.2.

5. Quality conformance test. When quality conformance testing was performed for attenuation rate at specified wavelength, one of two methods was allowed. The first method was to perform a spectral attenuation test using the test method cited for initial qualification. The alternative test method was using an Optical Time Domain Reflectometer (OTDR) measurement. Specific procedure for legacy test method is cited in 6.2. This measurement used a 30 mm mandrel for single mode and a restricted launch condition. This method of measurement is acceptable only when attenuation rate measurement is restricted to the transmission window of interest. As an alternative, a spectral attenuation test is allowed for conformance testing in lieu of the OTDR testing.

Note; TIA-455-61 was withdrawn in August 2003 and replaced by TIA-455-78B.

5.1 Test standard. TIA-455-78A included only the spectral attenuation test using beam optics using a cut back. TIA-455-78B is a shared IEC standard (IEC 60793-1-40) that includes tests as listed in 5.1a through 5.1c.

- a. Beam optics with a 2 meter cut back (cut-back method, method A),
- b. Beam optics with a 2 meter substitution fiber instead of a destructive cut back (insertion loss method, method B),
- c. An OTDR (backscattering, method C).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Legacy test method, initial qualification test. Attenuation rate was performed in accordance with TIA-455-46 for test samples with multimode fiber and in accordance with EIA/TIA-455-78 for those with single mode fiber.

6.1.1 Legacy test method, multimode, initial qualification. Test was to be performed per TIA-455-46, procedure B (using beam optics) to obtain the restricted launch condition as shown in figure 1. The light launch conditions were in accordance with TIA/EIA-455-50, light launch conditions for spectral attenuation measurements, using beam optics to obtain the specified restricted launch condition (method B). The other method (method A) in TIA/EIA-455-50 uses beam optics to obtain an overfilled condition followed by a mandrel wrap mode filter to obtain the specified restricted condition. Be advised that TIA/EIA-455-50 was withdrawn and replaced by TIA-455-78B in June 2003. Also, A.1.3.2 of TIA-455-78B cites using beam optics to obtain the specified restricted launch condition. TIA-455-46A was withdrawn in January 2003. Currently, the test is performed per TIA-455-78, method A or annex A. This method is equivalent to the method in TIA-455-46, procedure B.

6.1.2 Legacy test method, single mode initial qualification. Test was performed per TIA-455-78, method A or annex A. The test method is equivalent in EIA/TIA-455-78, the version replaced by TIA-455-78. Also, the test method is equivalent as the one in TIA-455-46, procedure B for multimode fiber. One means of removing higher order modes is cited by specifying EIA/TIA-455-77 which was withdrawn in January 2003.

6.2 Legacy method, quality conformance test. When the attenuation rate was performed on multimode or single mode using an OTDR, the test method is in accordance with TIA/EIA-455-61.

6.2.1 Limitations on legacy test standard cited for using an OTDR. TIA-455-61 had been withdrawn in August 2003 and replaced by TIA-455-78B. TIA-455-78A included only the spectral attenuation test using beam optics using a cut back.

MEASUREMENT 5203

MIL-STD-1678-5

GENERAL LEGACY MEASUREMENT SUPPORT PROCESSES

5301

MIL-STD-1678-5

MEASUREMENT 5301

LAUNCH CONDITION LEGACY CRITERIA.

1. Purpose. The legacy criteria for launch conditions is that criteria contained in the Optical test Measurement Guide that is not incorporated into MIL-STD-1678 part 2 Measurement Support Process 2203. These legacy criteria are provided for historical purposes only. The replacement of different TIA standards invalidated some of the legacy criteria from being specified in Measurement Support 2203. Also, the implementation of a prescription approach nullified other legacy criteria from being specified in Measurement Support Process 2203. There is no intention to incorporate the legacy criteria into a future revision of Measurement Support Process 2203.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

TELECOMMUNICATIONS INDUSTRY ASSOCIATION/ ELECTRONICS INDUSTRY ALLIANCE (EIA/TIA)

TIA-455-7	-	Numerical Aperture of Step-Index Multimode Optical Fibers by Output Far-Field Radiation Pattern Measurement.
TIA/EIA-455-34	-	Interconnection Device Insertion Loss Test.
TIA-455-58	-	Core Diameter Measurement of Graded-Index Optical Fibers.
TIA-455-78	-	Optical Fibres - Part 1-40: Measurement Methods and Test Procedures: Attenuation.
TIA-455-176	-	Optical Fibres Part 1-20, Measurement Methods and Test Procedures, Fibre Geometry.
TIA-455-177	-	IEC-60793-1-43 Optical Fibres – Part 1-43: Measurement Methods and Test Procedures – Numerical Aperture
TIA-526-14	-	Fiber Optic Power Loss Measurements of Installed Multimode Cable Plant.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Definitions.

3.1 Far field/near field distributions, overfilled launch condition. An overfilled launch condition is one that produces a nominal launch spot of diameter greater than or equal to the nominal core diameter of the test fiber and a nominal launch condition numerical aperture (NA) greater than or equal to the nominal NA. Due to measurement precision, a tolerance of ± 5 percent may be applied to this definition.

3.2 Mandrel wrap, multimode. Multimode cable may be wrapped to deplete power from the higher order modes with the result of minimizing transient effects from causing variations in the optical power level.

3.3 Mandrel wrap, single mode. Single mode cable is mandrel wrapped to increase the attenuation coefficient in the second and third order modes (used as the means of mode conditioning to filter out higher order modes).

MIL-STD-1678-5

3.4 Mandrel wraps, single mode detector end. Mandrel wraps attenuate power in the second and third order modes introduced into the test sample cable assembly by the test sample. If the loss of the test sample is low, then higher order modes are not being generated in the test sample. Detector end mandrel wraps are usually not necessary since a few meters of fiber also attenuate the second and third order modes.

3.5 Mandrel wraps, single mode, launch end. Mandrel wraps attenuate power in the second and third order modes launched into the test sample by the source.

4. Setup.

4.1 Methods to obtain a restricted launch condition. Mandrel wrap, restricted launch cables and beam optics are listed as acceptable approaches.

4.1.1 Mandrel wrap. The mandrel diameters listed will not provide a 70/70 restricted launch nor will any other practical mandrel wraps. The mandrel diameters listed in TIA/EIA-455-34 provide a more conservative launch condition than the 70/70 restricted launch. These mandrel diameters are acceptable for use. No verification for Near Field and Far Field optical power distributions of restricted launch conditions are required as long as the optical source used provides an overfilled launch condition.

4.1.1.1 Restricted launch condition for 50/125 micron fiber size. Place a 25 mm (.98 inch) mandrel at the launch end of each channel of the DUT to simulate the TIA restricted launch condition for the 50/125 micron fiber size.

4.1.1.2 Restricted launch condition for 62.5/125 micron fiber size. Place a 20 mm (.98 inch) mandrel at the launch end of each channel of the DUT to simulate the TIA restricted launch condition for the 62.5/125 micron fiber size.

4.1.2 Launch cables. Launch cables with the fiber sizes listed as a suitable alternative means to provide a restricted launch condition. No verification, such as using for Near Field and Far Field optical power distributions, are required as long as the optical source used provides an overfilled launch condition.

4.1.2.1 Restricted launch condition for 50/125 micron fiber size. Use of a specialty fiber (such as 42/125 micron fiber for the 50/125 micron fiber size) with a minimum length of 2 meters (6.5 feet) may be placed in front of each channel of the DUT to simulate a more restrictive launch condition.

4.1.2.2 Restricted launch condition for 62.5/125 micron fiber size. Use of a 50/125 micron fiber with a minimum length of 2 meters (6.5 feet) may be placed in front of each channel of the DUT to simulate a 70/70 restricted launch condition.

4.1.2.3 Restrictions for use of other specialty fibers. Near field and far field measurements are to be performed to verify conformance to restricted launch specifications on any specialty fiber used. Restricted launch condition shall not be more restrictive than that for a 70/70 launch condition. For the tolerance on the launch condition, use a tolerance of +10/-5 percent to obtain upper and lower limits. The compliance for a 70/70 restricted launch condition is evaluated at the minimum and maximum tails of the intensity curve at the indicated percent of the peak intensity.

4.1.3 Beam optics. Use beam optics with a spot restrictor and a NA restrictor.

4.2 Overfilled launch condition, multimode.

4.2.1 Use of launch cables. Launch conditioning cables are not commonly used to provide an overfilled launch condition. Launching from a larger core into a smaller core does not necessarily provide an overfilled launch if the optical source has a restricted launch condition. The launch condition from the optical source should be obtained and provided in the test procedure or with the list of test equipment.

4.2.2 Tests requiring a multimode overfilled launch condition. This is a more conservative launch condition and the vendor assumes a risk by using it. Measurements, using an overfilled launch condition, are required only for the initial insertion loss test. Power meter measurements, used for obtaining the overfilled launch condition, must have a sufficient detector area for capturing the higher order, loosely guided modes.

MEASUREMENT 5301

MIL-STD-1678-5

5. Procedure.

5.1 Verification, multimode launch condition. Certification using Coupled Power Ratio (CPR) or Near Field/Far Field power distributions shall be provided or measurements shall be performed to obtain CPR or Near Field/Far Field power distributions. Verify how the adjustments to the optical setup will be done to provide the required restricted launch condition for specific tests to be performed. CPR for multimode, 62.5/125 fiber size launch conditions and 1,300 nm wavelength is provided in 4.1.1 and 4.1.2.

5.1.1 Overfilled launch condition. For purposes of performing a CPR measurement for optical source acceptability, an acceptable overfilled launch condition is one within the range with a CPR from 20.5 to 22.5. Typical laboratory grade LED launch condition has a CPR from 20.5 to 22.5. Annex A of TIA-526-14 specifies the CPR limits for overfilled launch conditions (category 1) of multimode fibers.

5.1.2 Restricted launch condition. A 20 mm (6.5 feet) mandrel wrap launch condition has a CPR of approximately 21.0.

5.2 Verification, single mode launch condition. No verification is required if a mandrel is used in conjunction with a Fabry Perot type laser source.

5.3 Corrective action, loss of mandrel wrap. If the mandrel wrap becomes undone during testing, a determination must be made if the data is valid. If there is no difference in the optical power, with and without the mandrel, then the test data is valid. If the change in optical transmittance is less than 0.1 dB, there is no concern. If the change in optical transmittance approaches 0.5 dB, then a determination cannot be made if the test sample passes, fails, or is on the borderline. The test should be redone with a mandrel wrap.

5.4 Verification in terms of power distribution. Numerical Aperture (NA) is defined in terms of a worst case (overfilled) far field, power intensity distribution. Core diameter is defined in terms of a worst case (overfilled) near field, power intensity distribution. If the launch condition is not specified in the component specification or applicable test standard, a 70/70 restricted launch condition (70 percent of core diameter and 70 percent of the NA) may be used. Restricted launch condition shall not be more restrictive than that for a 70/70 launch condition. The compliance for a 70/70 restricted launch condition is evaluated at the minimum and maximum tails of the intensity curve at 5 percent of the peak intensity (see tables 5301-I and 5301-II).

5.4.1 Tolerance on power distribution. Launch condition tolerance for a 70/70 restricted launch. Use a tolerance of +10/-5 percent to obtain upper and lower limits for the tolerance. An example is provided for a 70/70 restricted launch condition tolerance for 62.5/125 micron (um) optical fiber in 5.4.2.1 for near field and 5.4.2.2 for far field distributions.

5.4.2 Example. An example is provided for a 70/70 restricted launch condition tolerance for 62.5/125 micron (um) optical fiber.

5.4.2.1 Near field. Use a tolerance of +10/-5 percent to obtain lower and upper limits of 40.6 to 50.0 um for core diameter.

Calculations: 70 percent - 5 percent of core diameter = $0.65 \times \text{core diameter} = 0.65 \times 62.5 \mu\text{m} = 40.6 \mu\text{m}$.

Likewise, a 70 percent + 10 percent of core diameter = $0.8 \times \text{core diameter} = 0.8 \times 62.5 \mu\text{m} = 50 \mu\text{m}$.

5.4.2.2 Far field. Use a tolerance of ± 5 percent to obtain upper and lower limits of 0.18 to 0.22 for NA.

Calculations: Where the NA for a far field, overfilled launch condition is 0.275, then a 70 percent - 5 percent of NA = $0.65 \times \text{NA} = 0.65 \times 0.275 = 0.178 \sim 0.18$.

Likewise a 70 percent + 10 percent of NA = $0.8 \times \text{NA} = 0.8 \times 0.275 = 0.22$.

5.4.3 Restricted launch condition for 50/125 micron fiber size (see table 5301-I).

MEASUREMENT 5301

MIL-STD-1678-5

TABLE 5301-I. Restricted launch tolerances for 50/125 micron fiber size with a NA of 0.20.

Pattern type	Intensity level (from peak value)	Minimum tolerance	Maximum tolerance	Measurement procedure
Far Field	50 percent	0.125	0.155	TIA-455-7
Near Field	50 percent	39	48	TIA-455-58

5.4.4 Restricted launch condition for 62.5/125 micron fiber size (see table 5301-II).TABLE 5301-II. 70/70 restricted launch tolerances for one common 62.5/125 micron fiber size with a NA of 0.275.

Pattern type	Intensity level (from peak value)	Minimum tolerance	Maximum tolerance	Measurement procedure
Far Field	5 percent	0.18	0.22	TIA-455-177
Near Field	2.5 percent	40.6	50.0	TIA-455-176

6. Notes6.1 Mandrel wraps.

6.1.1 Constrain for the 50/125 micron fiber. A 50/125 micron optical fiber has an 80 percent aperture of the 62.5/125 micron optical fiber, but it has a parabolic versus constant transmittance over the cross-sectional area. Additional constraints applied to the 50 micron fiber (such as mandrel wraps) tend to restrict the launch conditions beyond acceptable limits.

6.1.2 Comparison of restricted launch conditions, mandrel wrap versus 70/70. The launch conditions resulting from a 20 mm mandrel wrap for the 62.5/125 micron fiber size falls somewhere between an overfilled and a 70/70 restricted launch condition (closer to the overfilled). With a 20 mm mandrel wrap, a non worst-case, value is obtained. Using a 20 mm mandrel wrap, the transient loss and loss due to highest order modes in the connector/test sample will not be observed.

6.1.3 Guidance for single mode selection. It is acknowledged that it is optimum to use the largest possible mandrel size that produces repeatable results. In this manner, bending loss is minimized. Smaller than optimum mandrel sizes were selected that will provide measurement consistency while more conservatively ensuring adequate mode conditioning for covering products from different vendors. Additional optical loss from bending will occur.

6.1.4 Single mode source jumper and mode filtering criteria. Ensure that there is a 2 meter minimum length of fiber between the optical source and the test sample. Mode conditioning for filtering out higher order modes shall be performed by mandrel wrapping.

6.2 Launch fiber constraints.

MEASUREMENT 5301

MIL-STD-1678-5

6.2.1 Simulating overfilled launch conditions, multimode. There are several cases where overfilled or less restrictive launch conditions are required than available with existing test instrumentation. One case is where a transition from smaller to larger core fiber is required (such as when using an existing source switch on a multimode measurement system pigtailed with 50 micron fiber to test 100 micron fiber). Another is when the optical source does not provide an overfilled launch condition or this launch condition is not maintained through the measurement/switching system. Launch conditioning cables with larger core fiber may be used to simulate the required launch condition with the constraints noted in this section. Launch conditioning cables with mixing may be required to achieve the required launch condition (smaller to larger requires mixing with a mode scrambler versus filtering by a mandrel). Verification of achieving the proper launch condition by acceptable methods stated in the section (Coupled Power Ratio or near field/far field distribution) must be performed. In cases where profiles for near field/far field distributions are given, approval for compliance only with a specified point on that profile must be obtained. It is the responsibility of the test activity to determine the launch conditioning cable to be used (with mandrel size if wrapping is necessitated to achieve an overfill without being overly conservative or a desired, less restrictive launch). Note that the launch condition verification must be done using the fiber under test. Any measures taken on the launch conditioning cable only are not appropriate.

6.2.2 Launch into smaller fiber sizes, single mode. An optical source with a standard 9/125 micron fiber pigtail may be used to launch light into a fiber with a smaller single mode core size. This will incur a loss, but the single mode should reestablish itself in the smaller mode field diameter fiber. It should be noted that care needs to be taken on the output end to ensure that all of the light exiting the test sample be captured by the detection system. The numerical aperture of some small mode field diameter fiber designs may be larger than the acceptance angle of the detection system or that of standard multimode fiber that might be used as pigtails on the detector. Light from a single mode fiber with a smaller mode field diameter cannot be transmitted to the detector through single mode fiber with a larger mode field diameter. From the smaller core fiber, no detector end switch, switch-to-detector jumper or detector with a larger core fiber pigtail can be used. The preference is to not do the mismatch on the detection end. Alternately, it is possible for development of a system that performs accurate measurements with a mismatch present, but this requires careful implementation and characterization before test results should be considered acceptable.

6.3 Optical source guidance.

6.3.1 Recommendation for purchasing a new source. Purchase LED optical sources with an overfilled launch condition and place mandrel wraps on the launch end of the cable assemblies under test. This configuration will allow for maximum flexibility of different launch condition requirements.

6.3.2 Disconnects. The light launch conditions at the optical source end must be maintained throughout the test (no disconnects permitted) for all measurements taken with that fiber as the active channel.

6.3.3 Centerline wavelength. The centerline wavelength of the optical source used shall be 1,300 nm \pm 20 nm. Some tests in the military specifications contain a typographical error that states 1,330 nm \pm 20 nm.

MIL-STD-1678-5

LEGACY MEASUREMENTS, RESIDUAL DOD-STD-1678 METHODS

5401 - 5404

MIL-STD-1678-5

MEASUREMENT 5401

LOW TEMPERATURE FLEXIBILITY (COLD BEND)

1. Purpose. A legacy measurement, listed as Method 2020 in DOD-STD-1678, is provided as an appendix to this measurement since Method 2020 is referenced in several military specifications and commercial standards. To aid in expediting the replacement of Method 2020 with a commercial standard and more updated test process, this test process is provided. This updated process is the one being used in fiber optic component military specifications. The placement of this updated variation in Measurement 5401 is a means to standardize how this measurement is performed. To minimize test variations and to permit more accurate comparison of test results from multiple sources, a "standardized" approach is specified. Method 2020 is provided in [appendix A](#).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-STD-2042 - Fiber Optic Cable Topology Installation, Standard Methods for Naval Ships, Parts 1 to 6.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this standard practice to the extent specified herein. Unless otherwise specified, the issues are these documents are those cited in the solicitation or contract.

NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/ - Technical Manual, Installation and Testing Practices,
TM 1-1500-232-24-4 Aircraft Fiber Optic Cabling.

(A copy of this Government General Series Technical Manual can be obtained at web site: <https://www.navair.navy.mil/jswag>. At the home page select "Document Library" (on left side), then select the "JFOWG" folder followed by the "Maintenance Documents" folder.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA-455-13 - Visual and Mechanical Inspection of Fiber Optic Components, Devices, and Assemblies.
TIA-455-20 - Optical Fibres - Part 1-46: Measurement Methods and Test Procedures - Monitoring of Changes in Optical Transmittance.
TIA-455-37 - Low or High Temperature Bend Test for Fiber Optic Cable.
TIA-455-57 - Preparation and Examination of Optical Fiber Endface for Testing Purposes.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

MEASUREMENT 5401

MIL-STD-1678-5

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Tailoring of test from Method 2020 (see appendix A). Recommend that the low temperature (cold) bend test in accordance with TIA-455-37 as stated in paragraph 5 be performed in lieu of Method 2020. The low temperature flexibility (cold bend) test in accordance with procedure II of TIA-455-37 is essentially the same "double end" configuration test as the low temperature flexibility test in accordance with procedure III of Method 2020. Three variations are that the test (tensioning) masses are slightly different for some cable diameters, the preconditioning time is longer in Method 2020 (48 hours) than in TIA-455-37 (24 hours) and conditioning time is longer in Method 2020 (20 hours) than in TIA-455-37 (4 hours). In Method 2020, the radiant power measurement is performed before and after the test. The change in optical transmittance shall be performed in lieu of the radiant power measurement (see 4.2.2).

4. Test procedure.

4.1 Perform in accordance with TIA-455-37. DUT shall be tested in accordance with procedure II of TIA-455-37 with the test conditions listed in 4.1.1 through 4.1.6. The change in optical transmittance shall be measured during and after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in MIL-STD-1678 part 2 Measurement 2102. The DUT shall be visually examined in accordance with TIA-455-13 after the test.

4.1.1 Mandrel diameter. Equal to the minimum bend diameter of the cable rounded up to the nearest centimeter.

4.1.2 Conditioning temperature. Low operating temperature $\pm 2^{\circ}\text{C}$.

4.1.3 Tensioning masses. Test masses specified in TIA-455-37.

4.1.4 Number of mandrel turns. Three turns.

4.1.5 Examination magnification. Inspection DUT visually under ten power magnification.

4.1.6 Test times for optical measurements. Optical loss measurements at the low conditioning temperature prior to and after bending are not required. Post test loss or transmittance measurements are required after the sample has been returned to room temperature and the bends removed. The post test loss or transmittance values shall be compared to the loss or transmittance values obtained prior to the low temperature conditioning.

4.2 Substitution for measurement support processes cited in legacy method 1040.

4.2.1 Number of transmitting fibers, legacy method 1040. This support process is performed only if it is required by the specification sheet. Legacy method 1040 shall not be performed and no substitute support process is specified. The change in optical transmittance measurement (see MIL-STD-1678 part 2 Measurement 2102) is considered to be a more quantitative means to determine the same information. Method 1040 consists of illuminating one cabling (fiber bundle) end with white light. The other cabling end is photographed and the light intensity of each fiber compared.

4.2.2 Radiant power measurement, legacy method 6010. The change in optical transmittance measurement (see MIL-STD-1678 part 2 Measurement 2102) shall be substituted for legacy method 6010, the radiant power measurement. This temperature test measurement shall cite: "The change in optical transmittance shall be measured during and after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 in Part 2 of MIL-STD-1678."

MIL-STD-1678-5

MEASUREMENT 5401

APPENDIX A

METHOD 2020: LOW TEMPERATURE FLEXIBILITY (COLD BEND)

A.1 Purpose. This appendix provides Method 2020 as formerly specified in DOD-STD-1678. Method 2020 describes a procedure for determining the ability of a fiber optics cable to withstand bending around a mandrel at low temperature by measuring either the fiber breakage or the Changes in Optical Transmittance and by visual examination.

A.2. APPLICABLE DOCUMENTS

A.2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

A.2.2 Government documents.

A.2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL STANDARD

FED-STD-228 - Cable and Wire, Insulated; Methods of Testing.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

A.2.2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA-455-20 - Optical Fibres - Part 1-46: Measurement Methods and Test Procedures - Monitoring of Changes in Optical Transmittance.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

A.2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

A.3 Specimen. The specimen shall be a representative sample of fiber optics cable whose length is at least 150 times the finished outside diameter of the cable. It shall be prepared for testing in accordance with TIA-455-20.

MIL-STD-1678-5

APPENDIX A

A.4 Setup.

A.4.1 Bending apparatus The bending apparatus shall be as specified in method 2011 of FED-STD-228 except for the mandrel sizes which shall be specified in the individual specification sheet. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This low temperature flexibility (cold bend) test measurement shall cite: "The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678."

A.4.2 Test mandrels, masses, and clamping method. The test mandrels, masses, and clamping method shall be as shown in [figure 5401 A-1](#) for procedures I and II and in [figure 5401 A-2](#) for procedure III. The clamps shall not damage the specimen. The length of the specimen between the mandrel and the mass shall be sufficient to permit the required number of turns (the masses shall be of values shown in [figure 5401 A-2.](#)) or (the masses shall be sufficient to keep specimen taut and to permit bending without handling.)

A.5 Test procedures.A.5.1 Procedure I.

- Step 1 - Unless otherwise specified, the specimen shall be preconditioned for 48 hours at 23°C ± 2°C and 50 percent ±5 percent relative humidity.
- Step 2 - Prior to bending the total number of transmitting fibers shall be determined accordance with MIL-STD-1678 part 2 measurement 2102.
- Step 3 - The specimen shall be "installed on the applicable standard mandrel listed in FED-STD-228, method 2011 and placed in the cold chamber.
- Step 4 - Unless otherwise specified, the specimen shall be conditioned for 20 hours. The conditioning temperature and mass shall be as specified in the applicable specification.
- Step 5 - At the end of the conditioning period and while at the conditioning temperature the specimen shall be wound at a rate of 2 turns of, the mandrel per minute.
- Step 6 - The specimen and mandrel shall be removed, from the conditioning chamber and allowed to return to room temperature. The jacket or outer covering of the specimen shall be visually examined under 10X magnification for cracks or other defects caused by bending.
- Step 7 - Within one hour from the removal from the chamber of the specimen, it shall be straightened and removed from the mandrel. The total number of transmitting fibers shall be determined again.

A.5.2 Procedure II.

- Step 1 - Unless otherwise specified, the specimen shall be preconditioned for 48 hours at 23°C ± 2°C and 50 ± 5 percent relative humidity.
- Step 2 - Prior to bending the bending test, change in optical transmittance, Φ_1 , of the specimen shall be measured according with TIA-455-20. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This low temperature flexibility (cold bend) measurement shall cite: "The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2."

MEASUREMENT 5401

MIL-STD-1678-5

APPENDIX A

- Step 3 - The specimen shall be removed from the measurement apparatus, installed on the applicable standard mandrel listed in FED-STD-228, method 2011 and placed in the cold chamber.
- Step 4 - Unless otherwise specified, the specimen shall be conditioned for 20 hours. The conditioning temperature and mass shall be as specified in the specification sheet.
- Step 5 - At the end of the conditioning period and while at the conditioning temperature the entire specimen shall be wound at a rate of 2 turns of the mandrel per minute.
- Step 6 - The specimen and mandrel shall be allowed to return to room temperature. The jacket or outer covering of the specimen shall be visually examined under 10x magnification for cracks or other defects caused by bending.
- Step 7 - Within one hour after reaching room temperature the specimen shall be straightened and removed from the mandrel. The change in optical transmittance, Φ_1 , of the specimen shall then be measured in accordance with TIA-455-20. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This low temperature flexibility (cold bend) measurement shall cite: "The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2."

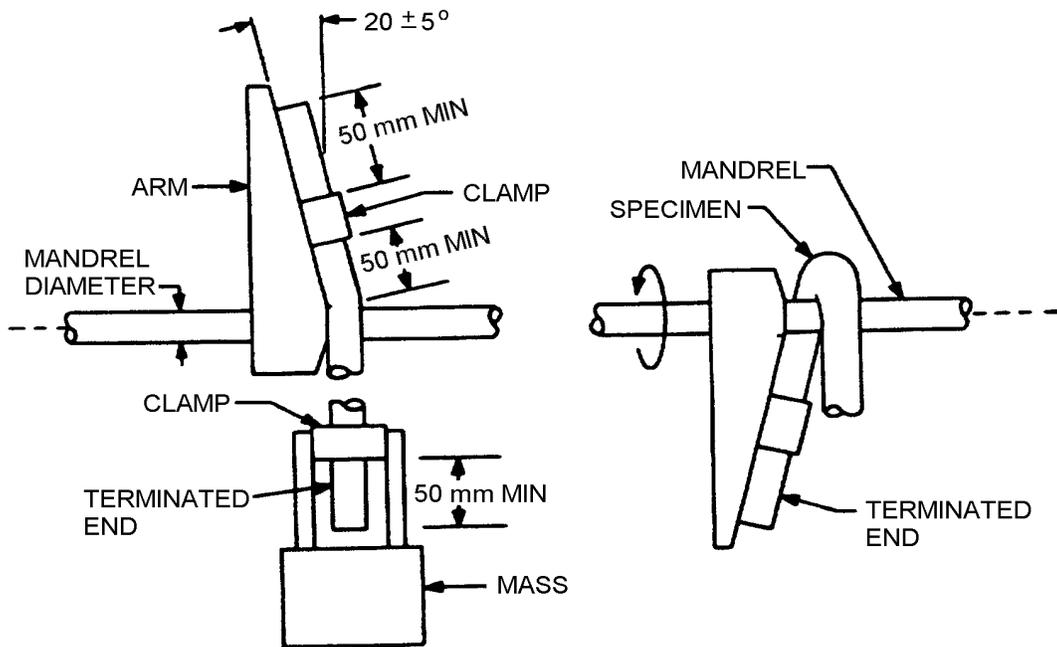


FIGURE 5401 A-1. Test mandrels and mass (Procedures I and II).

MIL-STD-1678-5

APPENDIX A


A.5.3 Procedure III.

- Step 1 – Unless otherwise specified, the specimen shall be preconditioned for 48 hours at 23°C \pm 2°C and 50 \pm 5 percent relative humidity.
- Step 2 – Prior to bending the change in optical transmittance, Φ_1 of the specimen shall be measured in accordance with TIA-455-20. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This low temperature flexibility (cold bend) test measurement shall cite: “The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2.”
- Step 3 – With the specimen connected to the power measurement apparatus, the cable shall be installed on the applicable mandrel and placed in the cold chamber. The specimen shall be clamped to the mandrel at two points adequately separated and a loop provided to avoid bending losses (see [figure 5401 A-2](#)). Specimen length outside the chamber will be kept to a minimum.
- Step 4 – In order to verify that the looping and clamping procedure does not cause excess loss, the change in optical transmittance, Φ_1 , shall be measured before and after installation on the mandrel.
- Step 5 - Unless otherwise specified, the specimen shall be conditioned for 20 hours. The conditioning temperature and mass shall be as specified in the specification sheet.
- Step 6 – At the end of the conditioning period and while at the conditioning temperature the entire specimen shall be wound at a rate of 2 turns of the mandrel per minute. The total number of turns shall be determined by the specification sheet.
- Step 7 – The specimen and mandrel shall be allowed to return to room temperature. The jacket or outer covering of the specimen shall be visually examined under 10x magnification for cracks or other defects caused by bending.
- Step 8 – Within one hour after reaching room temperature the specimen shall be straightened and removed from the mandrel. The change in optical transmittance, Φ_2 , of the specimen shall then be measured accordance with TIA-455-20. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This low temperature flexibility (cold bend) test measurement shall cite: “The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2.”

MEASUREMENT 5401

MIL-STD-1678-5

APPENDIX A

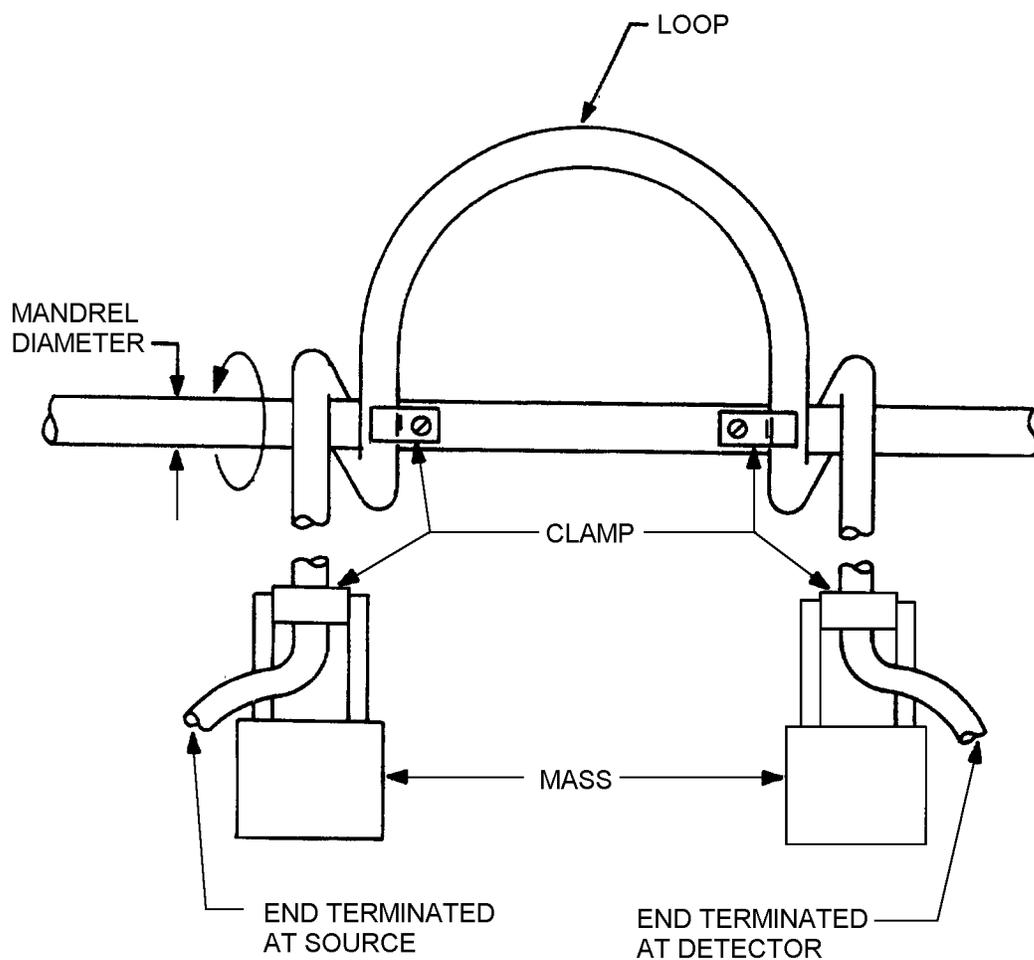

Cable nominal diameter (mm)	Test mass (kg)
2.5 and less	5
2.6 to 6.4	10
6.5 to 12.7	12.5
14.0 to 15.0	15
15.3 to 17.8	17.5
18.0 to 20.0	20
20.3 to 22.8	22.5
22.9 and over	25

FIGURE 5401 A-2. Test mandrels and mass (Procedure III).

MIL-STD-1678-5

APPENDIX A

A.5.4 Results. The following details shall be specified in the equipment specification:

- a. Procedure number.
- b. Pre test data required.
- c. Failure criteria.
- d. The percentage, P_N , of the fibers broken in the bending test (Procedure I) shall be reported and calculated from:

$$P_N = \frac{N_1 - N_2}{N_1} \times 100$$

- e. The diameter of the mandrel and the mass (Procedure I).
- f. Any cracking or splitting of the insulation (Procedure I).
- g. The ratio (Procedure II and III) of output power, R , shall be reported and calculated from:

$$R = \frac{\Phi_1}{\Phi_2}$$

Where Φ_1 is the change in optical transmittance before bending and Φ_2 is the change in optical transmittance after bending.

- h. The length of the specimen (Procedure II and III).
- i. The diameter of the mandrel and the mass (Procedure II and III).
- j. Any cracking or splitting of the insulation (Procedure II and III).
- k. The total number of turns on the mandrel.

MIL-STD-1678-5

MEASUREMENT 5402

POWER TRANSMISSION VERSUS TEMPERATURE

1. Purpose. A legacy measurement, listed as method 4010 in DOD-STD-1678, is provided as [appendix A](#) to this measurement since method 4010 is referenced in several military specifications and commercial standards. To aid in expediting the replacement of method 4010 with a commercial standard and more updated test process, this test process is provided. This updated process is the one being used in fiber optic component military specifications. The placement of this updated variation in Measurement 5402 is a means to standardize how this measurement is performed. To minimize test variations and to permit more accurate comparison of test results from multiple sources, a "standardized" approach is specified. Method 4010 is provided in [appendix A](#).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-STD-2042 - Fiber Optic Cable Topology Installation, Standard Methods for Naval Ships, Parts 1 to 6.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch/> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this standard practice to the extent specified herein. Unless otherwise specified, the issues are these documents are those cited in the solicitation or contract.

NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/ - Technical Manual, Installation and Testing Practices,
TM 1-1500-232-24-4 Aircraft Fiber Optic Cabling.

(A copy of this Government General Series Technical Manual can be obtained at web Site: <https://www.navair.navy.mil/jswag>. At the home page select "Document Library" (on left side), then select the "JFOWG" folder followed by the "Maintenance Documents" folder.)

2.2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA-455-3 - Procedure to Measure Temperature Cycling Effects on Optical Fibers, Optical Cable, and Other Passive Fiber Optic Components.
TIA-455-4 - Fiber Optic Component Temperature Life Test.
TIA-455-13 - Visual and Mechanical Inspection of Fiber Optic Components, Devices, and Assemblies.
TIA-455-20 - Optical Fibres – Part 1-46: Measurement Methods and Test Procedures – Monitoring of Changes in Optical Transmittance.
TIA-455-57 - Preparation and Examination of Optical Fiber Endface for Testing Purposes.

MEASUREMENT 5402

MIL-STD-1678-5

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Tailoring of test from Method 4010. Recommend that the soak at elevated temperature in accordance with TIA-455-4 (see 4.1) or the temperature cycling in accordance with TIA-455-3 (see 4.2) be performed in lieu of Method 4010. In Method 4010, the DUT is exposed to the elevated temperature for the duration of only 4 hours before the optical measurement is performed. In contrast, TIA-455-4 is performed to determine the optical and mechanical effects of the Device Under Test (DUT) when exposed to an elevated temperature for a specified duration. This longer duration is preferred since the optical performance is monitored for an extended period to simulate the life of the DUT. Performance of the test as listed in paragraph 4 below is recommended; however, the test can be tailored. This tailored test may cite an alternative elevated temperature, a 4 hour soak at the elevated temperature prior to the performing an optical measurement, and completion of the test upon completion of the optical measurement.

4. Test procedure.

4.1 Soak at elevated temperature (intent of test). DUT shall be tested in accordance with TIA-455-4. The specimens shall be exposed to dry air at the specified elevated temperature for the specified duration. The change in optical transmittance shall be monitored after the test in accordance with Measurement 2102 in Part 2 of this Standard Practice. The DUT shall be visually examined in accordance with TIA-455-13 after the test.

4.2 Temperature cycling (expansion on intent of test). DUT shall be tested in accordance with TIA-455-3 using the test condition schedule and soak times specified. (See table A and table B in TIA-455-3 or specify otherwise as applicable. An alternative is to list a table for the temperature cycle with the durations and temperatures of ramp rates and soaks/plateaus.) The change in optical transmittance shall be measured during and after the test in accordance with Measurement 2102 in Part 2 of this Standard Practice. The DUT shall be visually examined in accordance with TIA-455-13 after the test.

4.3 Substitution for measurement support processes cited in Method 4010.

4.3.1 Number of transmitting fibers, Method 1040. This support process is performed only if it is required by the specification sheet. Method 1040 shall not be performed and no substitute support process is specified. The change in optical transmittance measurement (see 4.3.2) is considered to be a more quantitative means to determine the same information. Method 1040 consists of illuminating one cabling (fiber bundle) end with white light. The other cabling end is photographed and the light intensity of each fiber compared.

4.3.2 Radiant power measurement, Method 6010. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This temperature test measurement shall cite: "The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678."

4.3.3 Fiber and bundle end preparation, Method 8040. In lieu of Method 8040, cable preparation and fiber termination shall be performed in accordance with the applicable installation or maintenance document, such as MIL-STD-2042 Part 5 or NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/TM 1-1500-232-24-4. Examination of cleaved end faces shall be performed to TIA-455-57. Examination of ferrule end faces for imperfections shall be performed in accordance with the applicable installation or maintenance document, such as MIL-STD-2042 Part 5 or NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/TM 1-1500-232-24-4. Inspection of a polished ferrule end face for proper end face geometry shall be performed in accordance with Measurement 5201 herein.

MEASUREMENT 5402

MIL-STD-1678-5

MEASUREMENT 5402

APPENDIX A

METHOD 4010: POWER TRANSMISSION VERSUS TEMPERATURE

A.1. Purpose. This appendix provides Method 4010 as formerly specified in DOD-STD-1678.

A.2. APPLICABLE DOCUMENTS

A.2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

A.2.2 Government documents.

A.2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-STD-2042 - Fiber Optic Cable Topology Installation, Standard Methods for Naval Ships, Parts 1 to 6.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

A.2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this standard practice to the extent specified herein. Unless otherwise specified, the issues are these documents are those cited in the solicitation or contract.

NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/ - Technical Manual, Installation and Testing Practices,
TM 1-1500-232-24-4 Aircraft Fiber Optic Cabling.

(A copy of this Government General Series Technical Manual can be obtained at web Site: <https://www.navair.navy.mil/jswag>. At the home page select "Document Library" (on left side), then select the "JFOWG" folder followed by the "Maintenance Documents" folder.)

A.2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

A.3 Scope. This method describes a procedure for determining the effect of the temperature upon the transmitted power of a fiber optics cable. The temperature effect on transmitted power is defined as:

$$R = \frac{\Phi_2}{\Phi_1}$$

Where Φ_2 is the radiant power at temperature T_2 and Φ_1 is the radiant power at T_1 (Note: $T_2 > T_1$). Unless otherwise specified $T_1 = 25$ C.

MIL-STD-1678-5

APPENDIX A

A.4. APPARATUS.

A.4.1 The apparatus shall be as specified herein and in the change in optical transmittance measurement TIA-455-20 shall be substituted for Method 6010, the radiant power measurement. This power transmission versus temperature test measurement shall cite: "The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2."

A.4.2 Chamber. The volume of the test chamber shall be of sufficient size so that the specimen within it will not interfere with the generation and maintenance of the test conditions. The heat source shall be located so that the radiant heat will not fall directly on the specimen. Unless otherwise specified, thermocouples or equivalent temperature sensors shall be used to determine the temperature within the chamber and to control the chamber temperature.

A.5. PROCEDURE.

Step 1 - The output of the source shall be adjusted to the center wavelength, bandwidth and intensity of interest.

Step 2 - In lieu of Method 8040 of DOD-STD-1678, both ends of a long length of the specimen shall either be prepared in accordance with the applicable installation or maintenance document, such as MIL-STD-2042 Part 5 or NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/TM 1-1500-232-24-4 and polished so that the end faces are perpendicular to the axis of the specimen, or index matching fluid shall be used to couple the optical power between source and specimen and specimen and detector. Examination of cleaved end faces shall be performed to TIA-455-57. The total length (L_4) of the specimen shall be determined.

Step 3 - The specimen shall be placed in the test chamber as shown in figure 5402 A-1. Unless otherwise specified, the length of the specimen shall be loosely coiled and the diameter of the coil shall be no less than 300 mm (11.8 inches). The coil shall be supported in such a manner as to facilitate free movement of air through it. The length, L_2 , within the chamber shall be determined. The lengths outside the chamber, (L_1 and L_3) shall be as short as practical.

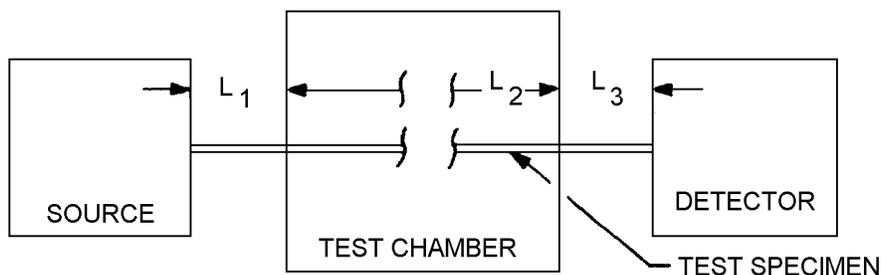


FIGURE 5402 A-1. Test chamber.

Step 4 - One end of the specimen shall be placed in the specified radiation beam so that the entire end is uniformly illuminated with the launch cone specified in the specification sheet.

Step 5 - The other end shall be placed so that the axis of the output cone of radiation is perpendicularly incident on the detector and all of the radiation impinges on the detector. If an integrating sphere is used, the end shall be placed within the sphere.

MEASUREMENT 5402

MIL-STD-1678-5

APPENDIX A

Step 6 - A cladding mode stripper, if used, shall be applied to the fiber(s) in the specimen.

Step 7 - With the specimen and test chamber at room ambient conditions measure the temperature, T_1 , of the specimen.

Step 8 - The change in optical transmittance, Φ_1 , shall be measured in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in measurement 2102 from MIL-STD-1678 part 2 at the specified wavelength(s). If required by the specification sheet, the number of transmitting fibers shall be determined by change in optical transmittance measurement TIA-455-20. Method 1040 shall not be performed and no substitute support process is specified. The change in optical transmittance measurement TIA-455-20 is considered to be a more quantitative means to determine the same information. Method 1040 consists of illuminating one cabling (fiber bundle) end with white light. The other cabling end is photographed and the light intensity of each fiber compared.

Step 9 - The temperature of the chamber (and specimen) shall be raised to the temperature specified in the specification sheet. Unless otherwise specified, the specimen shall be conditioned for 4 hours. At the end of the conditioning period the temperature, T_2 , shall be measured.

Step 10 - While still within the chamber and at temperature T_2 , the change in optical transmittance, Φ_2 , shall be measured in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in measurement 2102 from MIL-STD-1678 part 2 at the specified wavelength(s). If required by the specification sheet, the number of transmitting fibers shall be determined by the change in optical transmittance measurement TIA-455-20. Method 1040 shall not be performed and no substitute support process is specified. The change in optical transmittance measurement TIA-455-20 is considered to be a more quantitative means to determine the same information. Method 1040 consists of illuminating one cabling (fiber bundle) end with white light. The other cabling end is photographed and the light intensity of each fiber compared.

Step 11 - The ratio of transmitted power, R , shall be calculated according to the [formula in A.3](#) for each of the wavelengths and temperatures specified.

A.6. RESULTS. The following details shall be as specified in the equipment specification:

- a. Procedure number.
- b. Pre test data required.
- c. Failure criteria
- d. The ratio, wavelength(s) and temperature(s) where the transmitted power was measured.
- e. The radiation source, center wavelength(s), band pass at the wavelength(s) and numerical aperture of the launched radiation cone.
- f. The total length of the specimen, L_4 , and the length of the specimen in the conditioning chamber, L_2 .
- g. The number of transmitting fibers before and after heat conditioning if required.
- h. The identity and refractive index at the wavelength(s) of interest of index matching fluids, if used.
- i. The type of cladding mode stripper, if used.
- j. The type, size and responsivity of the detector at the wavelength(s) of interest.

MEASUREMENT 5402

MIL-STD-1678-5

MEASUREMENT 5403

POWER TRANSMISSION VS. HUMIDITY

1. Purpose. A legacy measurement, listed as method 4030 in DOD-STD-1678, is provided as an appendix to this measurement since Method 4030 is referenced in several military specifications and commercial standards. To aid in expediting the replacement of method 4030 with a commercial standard and more updated test process, this test process is provided. This updated process is the one being used in fiber optic component military specifications. The placement of this updated variation in Measurement 5403 is a means to standardize how this measurement is performed. To minimize test variations and to permit more accurate comparison of test results from multiple sources, a "standardized" approach is specified. Method 4030 is provided in [appendix A](#).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-202	-	Electronic and Electrical Component Parts.
MIL-STD-2042	-	Fiber Optic Cable Topology Installation, Standard Methods for Naval Ships, Parts 1 to 6.

(Copies of these documents are available online at <https://assist.daps.dla.mil/quicksearch> or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this standard practice to the extent specified herein. Unless otherwise specified, the issues are these documents are those cited in the solicitation or contract.

NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/ TM 1-1500-232-24-4	-	Technical Manual, Installation and Testing Practices, Aircraft Fiber Optic Cabling.
--	---	--

(A copy of this Government General Series Technical Manual can be obtained at web Site: <https://www.navy.mil/jswag>. At the home page select "Document Library" (on left side), then select the "JFOWG" folder followed by the "Maintenance Documents" folder.)

2.2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA/EIA-455-5	-	Humidity Test Procedure for Fiber Optic Components.
TIA-455-13	-	Visual and Mechanical Inspection of Fiber Optic Components, Devices, and Assemblies.
TIA-455-20	-	Optical Fibres – Part 1-46: Measurement Methods and Test Procedures – Monitoring of Changes in Optical Transmittance.
TIA-455-57	-	Preparation and Examination of Optical Fiber Endface for Testing Purposes.

MEASUREMENT 5403

MIL-STD-1678-5

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Tailoring of test from method 4030. Recommend that the temperature humidity cycling in accordance with TIA/EIA-455-5 as stated in paragraph 4 below be performed in lieu of method 4020. The moisture resistance conditioning in accordance with method 106 of MIL-STD-202 without vibration (cited in method 4030) is the same test as the temperature humidity cycling in accordance with Method B of TIA/EIA-455-5. In method 4030, the radiant power measurement is performed before and after the test. The change in optical transmittance shall be performed in lieu of the radiant power measurement (see 4.2.2).

4. Test procedure.

4.1 Perform in accordance with TIA/EIA-455-5. DUT shall be tested in accordance with method B of TIA/EIA-455-5. The subcycle shall be included in the testing. The change in optical transmittance shall be measured during and after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from Part 2 of this standard. The DUT shall be visually examined in accordance with TIA-455-13 after the test.

4.2 Substitution for measurement support processes cited in method 4010.

4.2.1 Number of transmitting fibers, method 1040. This support process is performed only if it is required by the specification sheet. Method 1040 shall not be performed and no substitute support process is specified. The change in optical transmittance measurement (see 4.2.2) is considered to be a more quantitative means to determine the same information. Method 1040 consists of illuminating one cabling (fiber bundle) end with white light. The other cabling end is photographed and the light intensity of each fiber compared.

4.2.2 Radiant power measurement, method 6010. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This temperature test measurement shall cite: "The change in optical transmittance shall be measured during and after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2."

4.2.3 Fiber and bundle end preparation, method 8040. In lieu of Method 8010, cable preparation and fiber termination shall be performed in accordance with the applicable installation or maintenance document, such as MIL-STD-2042 Part 5 or NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/TM 1-1500-232-24-4. Examination of cleaved end faces shall be performed to TIA-455-57. Examination of ferrule end faces for imperfections shall be performed in accordance with the applicable installation or maintenance document, such as MIL-STD-2042, Part 5 or NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/TM 1-1500-232-24-4. Inspection of a polished ferrule end face for proper end face geometry shall be performed in accordance with Measurement 5201 of MIL-STD-1678 part 5.

MIL-STD-1678-5

MEASUREMENT 5403

APPENDIX A

METHOD 4030: POWER TRANSMISSION VERSUS HUMIDITY

A.1. Purpose. This appendix provides Method 4030 as formerly specified in DOD-STD-1678.

A.2. Scope. This method describes a procedure for determining the effect of the humidity upon the transmitted power of a fiber or bundle. The humidity effect on transmitted power is defined as:

$$R = \frac{\phi_2}{\phi_1}$$

Where Φ_2 is the change in optical transmittance at the final condition measured in accordance with TIA-455-20. Provisions are made for continuously monitoring transmitted power.

A.3. TEST.

A.3.1 Specimen. The specimen shall be taken from a representative sample of fiber optics cable

A.3.2 Apparatus. The apparatus shall be as specified herein and in TIA-455-20. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This power transmission versus humidity test measurement shall cite: "The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2."

A.3.3 Chamber. The volume of the test chamber shall be such that the specimen will not interfere with the generation and maintenance of the test conditions. The heat source of the test chamber shall be so located that radiant heat will not fall directly on the specimen. The chamber shall be constructed so that condensation which may occur on the inside walls of the chamber will not drop or flow onto the specimen.

A.3.4 Test procedure.

Step 1 - The output of the source shall be adjusted to the center wavelength, bandwidth and intensity of interest.


Step 2 - In lieu of Method 8040 of DOD-STD-1678, both ends of a long length of the specimen shall either be prepared in accordance with the applicable installation or maintenance document, such as MIL-STD-2042 Part 5 or NAVAIR 01-1A-505-4/T.O. 1-1A-14-4/TM 1-1500-232-24-4 and polished so that the end faces are perpendicular to the axis of the specimen, or index matching fluid shall be used to couple the optical power between source and specimen and specimen and detector. Examination of cleaved end faces shall be performed to TIA-455-57. The total length (L_4) of the specimen shall be determined.

Step 3 - The specimen shall be placed within the test chamber as shown in [figure 5403 A-1](#) and pre-conditioned at $25\text{ }^\circ\text{C} \pm 2\text{ }^\circ\text{C}$ and 50 percent \pm 5 percent R.H. for 48 hours. Unless otherwise specified, the length of specimen inside the chamber shall be loosely coiled and the diameter of the coil shall be no less than 300 mm (11.8 inches). The coil shall be supported in such a manner as to facilitate free movement of air through it. The length, L_2 , within the chamber shall be determined. The lengths, L_1 and L_3 , outside the chamber shall be as short as practical.

MEASUREMENT 5403

MIL-STD-1678-5

APPENDIX A

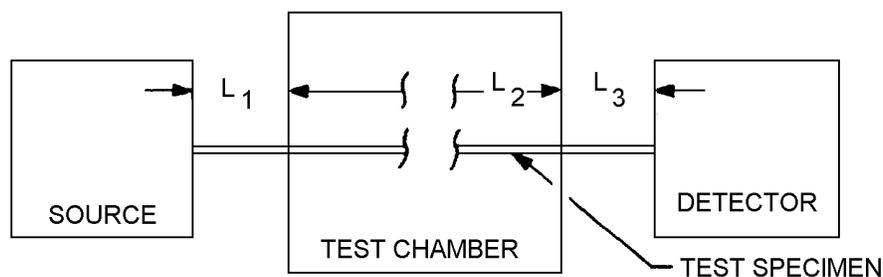FIGURE 5403 A-1. Test chamber.

- Step 4 - One end of the specimen shall be placed in the specified radiation beam so that the entire end is uniformly illuminated with the launch cone specified in the specification sheet.
- Step 5 - The other end shall be placed so that the axis of the output cone of radiation is perpendicularly incident on the detector and all of the radiation impinges on the detector. If an integrating sphere is used, the end shall be placed within the sphere.
- Step 6 - A cladding mode stripper, if used, shall be applied to the fiber(s) in the specimen.
- Step 7 - At the end of the pre conditioning period the change in optical transmittance, Φ_1 , shall be measured in accordance with TIA-455-20 at the specified wavelengths.
- Step 8 - Without removing the specimen, it shall be subjected to moisture resistance conditioning according to method 106 of MIL-STD-202 except that the specimen shall not be vibrated.
- Step 9 - At the end of the 10th cycle and while still at 25°C and 95 percent R.H. the change in optical transmittance, Φ_2 , shall be measured. When specified, the transmitted power shall be continuously recorded throughout the 10 cycles and during an additional post conditioning of 48 hours at 50 percent R.H. If required by the specification sheet, the number of transmitting fibers shall be determined by the change in optical transmittance measurement, TIA-455-20. This is considered to be a more quantitative means to determine the same information. Method 1040 consists of illuminating one cabling (fiber bundle) end with white light. The other cabling end is photographed and the light intensity of each fiber compared.
- Step 10 - The ratio of transmitted power, R, shall be calculated according to the formula in section 1 for each of the wavelengths specified.

A.4. RESULTS. The following details shall be as specified in the equipment specification:

- a. Procedure number.
- b. Pre test data required.
- c. Failure criteria.
- d. The ratio of the transmitted power, R, and wavelength(s) where the transmitted power was measured.
- e. The radiation source, center wavelength(s), band pass at the wavelength(s) and numerical aperture of the launched radiation cone.

MEASUREMENT 5403

MIL-STD-1678-5

APPENDIX A

- f. The total length of the specimen, L_4 , and the length of the specimen in the conditioning chamber, L_2 .
- g. The identity and refractive index at the wavelength(s) of interest of index matching fluids, if used.
- h. The type of cladding mode stripper, if used.
- i. The type, size and responsivity of the detector at the wavelength(s) of interest.
- j. If required, the minimum ratio of transmitted power, R_{\min} , shall be reported according to:

$$R_{\min} = \frac{\Phi_{\min}}{\Phi_1}$$

Where Φ_{\min} is the minimum value of optical power (change in optical transmittance) observed during continuous monitoring.

- k. The relative humidity and temperature where Φ_{\min} was observed.

MIL-STD-1678-5

MEASUREMENT 5404

FREEZING WATER IMMERSION - ICE CRUSH

1. Purpose. A legacy measurement, listed as method 4050 in DOD-STD-1678, is provided as an appendix to this measurement since Method 4050 is referenced in several military specifications and commercial standards. To aid in expediting the replacement of method 4050 with a commercial standard and more updated test process, this test process is provided. This updated process is the one being used in fiber optic component military specifications. The placement of this updated variation in Measurement 5404 is a means to standardize how this measurement is performed. To minimize test variations and to permit more accurate comparison of test results from multiple sources, a "standardized" approach is specified. Method 4050 is provided in [appendix A](#).

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, and 5 of this standard practice. This section does not include documents cited in other sections of this standard practice or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3, 4, and 5 of this standard practice, whether or not they are listed.

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

ELECTRONICS INDUSTRY ALLIANCE/TELECOMMUNICATIONS INDUSTRY ASSOCIATION (EIA/TIA)

TIA-455-13	-	Visual and Mechanical Inspection of Fiber Optic Components, Devices, and Assemblies.
TIA-455-20	-	Optical Fibres - Part 1-46: Measurement Methods and Test Procedures - Monitoring of Changes in Optical Transmittance.
EIA/TIA-455-98	-	Fiber Optic Cable External Freezing Test.

(Copies are available from <http://www.global.ihs.com> or to Global Engineering Documents, 1990 M Street NW, Suite 400, Washington, DC 20036.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. Tailoring of test from method 4050. Recommend that the freezing water immersion in accordance with EIA/TIA-455-98 as stated in paragraph 4 below to be performed in lieu of method 4050. The EIA/TIA-455-98 test may be conducted to simulate either the icing effect of immersion or the crushing effect of ice as detailed in 3.1 and 3.2. In Method 4030, the radiant power measurement is performed before and after the test. The change in optical transmittance shall be performed in lieu of the radiant power measurement ([see 4.6.1](#)).

3.1 Simulate icing effect of immersion. This test simulates water pooling to full immersion of the DUT then freezing. This is the method to standardize the testing of fiber optic cabling components. The test cited in paragraph 4 is based on this type of simulation.

3.2 Simulate crush effect of ice. This test simulates water fully filling a confined and sealed space then freezing. The confinement results in an expanding and crushing effect on the DUT once the water freezes. Method 4050 is a test to simulate this crush effect of ice. Method 4030 is essentially the same test as the simulated crush effect of ice in accordance with method B, procedure 1 of EIA/TIA-455-98. [Paragraph 4](#) should be tailored to cite method B in lieu of method A if the intent is to simulate the crush effect when the DUT is in a confined and sealed space.

MEASUREMENT 5404

MIL-STD-1678-5

4. Test procedure. DUT shall be tested in accordance with method A, procedure 1 of EIA/TIA-455-98. The change in optical transmittance shall be measured during and after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2. The DUT shall be visually examined in accordance with TIA-455-13 after the test.

4.1 Cable as the DUT. Cable shall be loosely coiled in the water vessel. The size of the water vessel shall allow for a loosely coiled cable that is not in violation of the minimum bend diameter and that comes into contact only with the vessel floor.

4.2 Connector as the DUT. The size of the water vessel shall be such that, when the mated connectors are placed in the center of the vessel, the mated connectors are within 150 mm of the sides, top, and bottom.

4.3 General DUT placement. Place each DUT assembly in a separate vessel so that it is within 150 mm of sides, water line and bottom. Keep evenly spaced, top-to-bottom and on both sides, so don't get a differential pressure from the ice. Keep within 150 mm (5.9 inches) of the wall so don't get a higher pressure from the ice. Axial direction (front and back) can be sufficiently long to allow cables to protrude from top of vessel (Center DUT in vessel in the axial direction).

4.4 Use and placement of a temperature sensor. A temperature sensor (such as thermocouple, resistance thermometer, or thermistor) shall be used to determine when the ice has been frozen to a temperature of -10°C . The sensing tip of the temperature sensor shall be placed the center of the water and as close to the DUT as feasible.

4.5 Criterion for the water being considered "completely frozen". This criterion applies when the chamber temperature is at the -10°C soak temperature. Once the temperature sensor (see 4.4) measures a temperature of -2°C or below, the frozen water is considered to be "completely frozen". At this point, an optical transmittance measurement can be obtained (if required). The temperature chamber temperature can be raised from -10°C to -2°C for the next step in the test.

4.6 Measurement substitution. Substitution for measurement support processes cited in Method 4010.

4.6.1 Radiant power measurement, method 6010. The change in optical transmittance in accordance with TIA-455-20 adhering strictly to the setup and test procedure specified in Measurement 2102 of MIL-STD-1678 part 2 shall be substituted for method 6010, the radiant power measurement. This freezing water immersion - ice crush test measurement shall cite: "The change in optical transmittance shall be measured during and after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 of MIL-STD-1678 part 2."

MIL-STD-1678-5

MEASUREMENT 5404

APPENDIX A

METHOD 4050: FREEZING WATER IMMERSION – ICE CRUSH

A.1. Purpose. This appendix provides method 4050 as formerly specified in DOD-STD-1678.

A.2. Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

A.3. SCOPE.

A.3.1 Crush force. This method describes a procedure for determining the effect of crush force caused by freezing water upon the transmitted power of a fiber optics cable immersed in the freezing water. The ice crush effect on transmitted power is defined as.

$$R = \frac{\Phi_2}{\Phi_1}$$

Where Φ_1 and Φ_2 are the change in optical transmittance measured before and after freezing respectively.

A.4. TEST.

A.4.1 Specimen. The specimen shall be taken from a representative sample of fiber optics cable.

A.4.2 Apparatus. The apparatus shall be as specified herein.

A.4.2.1 Cable housing. The housing shall consist of a 100 mm (3.9 inches) I. D. steel pipe of 6.4 mm (.25 inch) wall thickness. The length of the pipe shall be at least 380 mm (14.9 inches). A 150 mm (5.9 inches square steel flange of 6.4 mm (.25 inch) thickness shall be welded to each end and then capped with a 150 mm (5.9 inches) square steel plate of 6.4 mm (.25 inch) thickness bolted to it with four 6.4 mm (.25 inch) diameter bolts. Each end cap shall have a centrally located hole of diameter slightly larger than the cable diameter to accept the cable and a grommet or similar effective sealing device. The mating faces of the flange and plate shall be sealed using a neoprene o-ring under compression in matching circular grooves on these faces. Water shall be introduced into the housing through a 9.5 mm (.37 inch) diameter hole in the side of the housing. This hole shall be filled with an effective sealing plug or valve.

A.4.2.2 Freezing chamber. An environmental chamber capable of maintaining the housing and specimen at the required temperature $\pm 1^\circ\text{C}$ shall be used for temperature control.

A.4.3 PROCEDURE.

Step 1 - The output of the source shall be adjusted to the center wavelength, bandwidth and intensity of interest.

Step 2 - Both ends of the specimen shall either be prepared with standard terminations and finished so that the endfaces are perpendicular to the axis of the specimen, or index matching fluid shall be used to couple the optical power between source and specimen and specimen and detector. The total length (Lk) of the specimens shall be determined.

MEASUREMENT 5404

MIL-STD-1678-5

APPENDIX A

Step 3 - The specimen shall be placed in the cable housing and the ends and endcaps sealed (see figure 5404 A-1). The housing shall be completely filled with water and placed horizontally in the chamber. The length, L_2 , within the housing shall be determined. The lengths, L_1 and L_3 , outside the chamber shall be as short as practical.

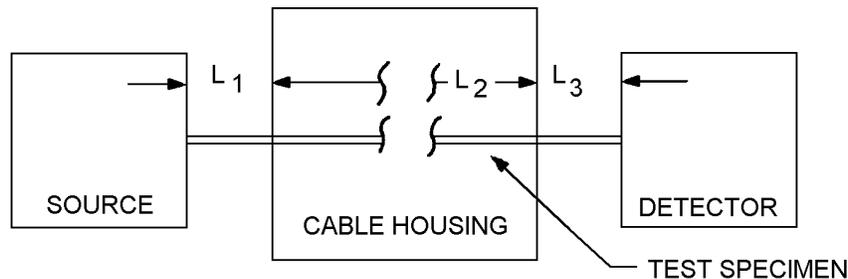


FIGURE 5404 A-1. Freezing chamber test apparatus.

- Step 4 - One end of the specimen shall be placed in the specified radiation beam so that the entire end is uniformly illuminated with the launch cone specified in the specification sheet.
- Step 5 - The other end shall be placed so that the axis of the output cone of radiation is perpendicularly incident on the detector and all of the radiation impinges on the detector. If an integrating sphere is used, the end shall be placed with the sphere.
- Step 6 - A cladding mode stripper, if used, shall be applied to the fiber(s) in the specimen.
- Step 7 - The radiant power, Φ_1 , shall be measured in accordance with the change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This temperature test measurement shall cite: "The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2."
- Step 8 - The chamber temperature shall be lowered to -10°C at a rate of 20°C per hour. The chamber shall be maintained at that temperature for 6 hours. The temperatures shall then be raised to -2°C and maintained at that value for 1 hour.
- Step 9 - The change in optical transmittance, Φ_2 , shall be measured in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2. If the specimen is a cable containing multiple fibers or multiple bundles, each fiber (or bundle) acting as a discrete optical transmission element, all transmission elements within the cable shall be tested for change in optical transmittance.
- Step 10 - The cable housing and specimen shall be allowed to return to room temperature. The specimen shall then be removed from the cable housing, dried and examined visually for damage.

MEASUREMENT 5404

MIL-STD-1678-5

APPENDIX A

A.5. RESULTS.

- a. The ice crush effect, R, shall be reported.
- b. The change in optical transmittance shall be measured in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2. The change in optical transmittance measurement shall be substituted for Method 6010, the radiant power measurement. This freezing water immersion – ice crush test measurement shall cite: “The change in optical transmittance shall be measured [during and] after the test (from a baseline obtained before each test) in accordance with TIA-455-20 for transmitted power adhering strictly to the setup and test procedure specified in Measurement 2102 from MIL-STD-1678 part 2.” shall be reported.
- c. The length of the specimen, L_2 , in the cable housing shall be reported.
- d. The temperature of test, if other than -2°C , shall be reported
- e. Visual observations of damage to the specimen shall be reported.

MIL-STD-1678-5

Custodians:

Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 60GP-2010-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil/>.