


REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

ENLAR.
THI

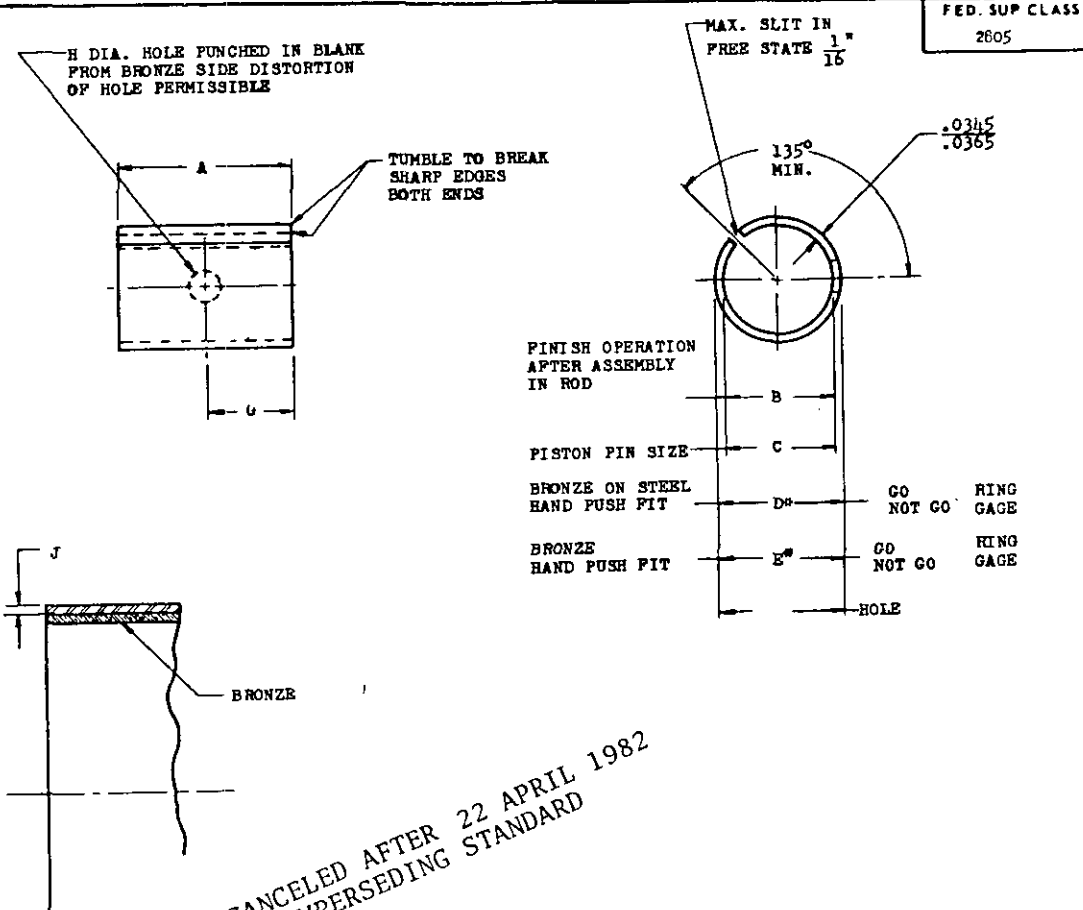

Ⓐ CANCELED AFTER 22 APRIL 1982
NO SUPERSEDING STANDARD

D. NUMBER	A	B	C	D*	E*	F	G	H	J
-1	<u>1.17</u> 1.19	<u>.8593</u> .8596	<u>.8591</u> .8593	<u>.9165</u> .9185	<u>.9175</u> .9195	<u>.913</u> .914	.59	.219	<u>.0175</u> .0197
-2	<u>1.302</u> 1.322	<u>.9901</u> .9904	<u>.9901</u> .9899	<u>1.0470</u> 1.0490	<u>1.0480</u> 1.0500	<u>1.044</u> 1.045	.66	.219	<u>.0175</u> .0197
-3	<u>1.292</u> 1.312	<u>1.1151</u> 1.1154	<u>1.1149</u> 1.1151	<u>1.1725</u> 1.1745	<u>1.1735</u> 1.1755	<u>1.169</u> 1.170	.66	.219	<u>.0175</u> .0197
-4	<u>.790</u> .810	<u>.5436</u> .5438	<u>.5433</u> .5435	<u>.6000</u> .6015	<u>.6005</u> .6020	<u>.597</u> .598	.40	.156	<u>.017</u> .020
-5	<u>.865</u> .885	<u>.6403</u> .6405	<u>.6400</u> .6402	<u>.6965</u> .6980	<u>.6970</u> .6985	<u>.6935</u> .6945	.44	.156	<u>.017</u> .020

* THESE DIMENSIONS ARE LIMITING RING GAGE DIMENSIONS. UPPER DIMENSION INDICATES "NOT GO", LOWER DIMENSION INDICATES "GO" GAGE DIAMETER.

Ⓒ ENTIRE STANDARD REVISED

P. ARMY NO (ERDL)	TITLE	MILITARY STANDARD
Other Cust	BEARING, SLEEVE; ENGINE, PISTON PIN	MS 13963
A-Y. - 69 NAVY - YD		
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 2